


2006-2014 SRT8 Aluminum and Carbon Fiber

1-Piece CV Driveshaft

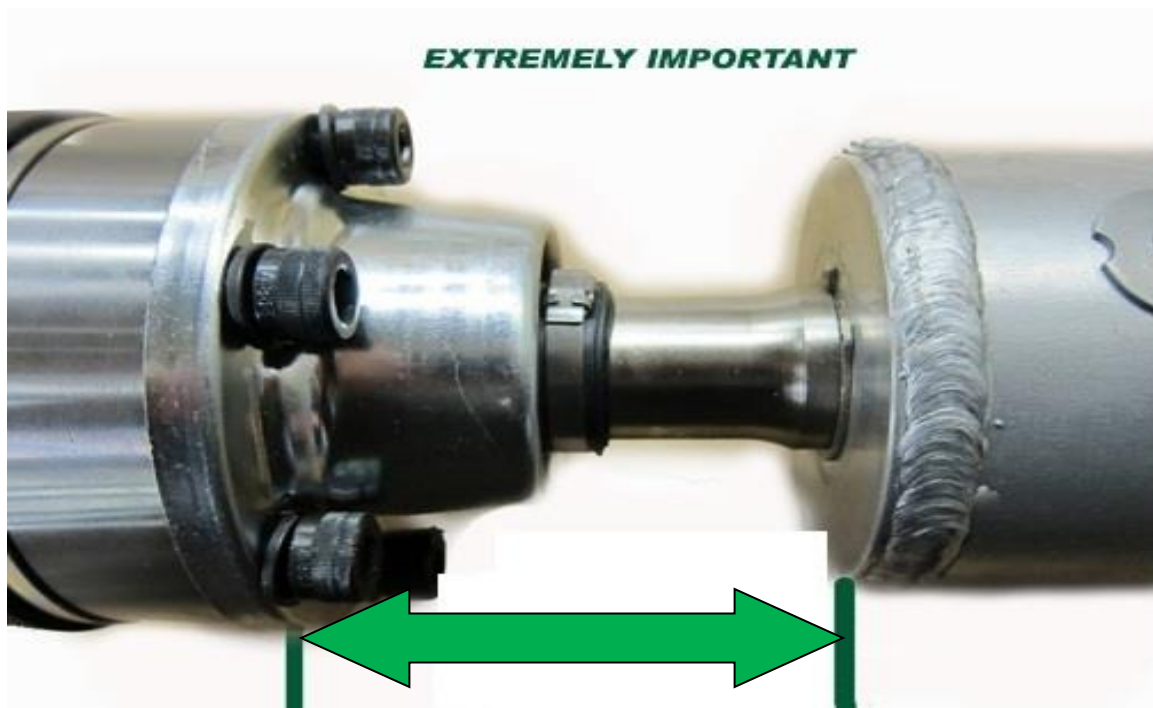

Driveshaft CV Clearance MUST BE CHECKED after installation.

**2006-2014 Charger / Challenger ALL (CHSH1-xxx / CHSH5-xxx / CHSH7-xxx)
Must be between 3.25" – 3.75"**

**If dimension is not within the allowed range, do not run the driveshaft
Adapter plate Hardware Torque:**

Front: (3 or 4) M12 Bolts 70 ft-lbs / (6) M10 Bolts 57 ft-lbs

Rear: (3 or 4) M12 Bolts 70 ft-lbs / (4) 7/8 Bolts 70 ft-lbs

INCLUDED ROUND DIFFERENTIAL SPACER MUST BE INSTALLED FOR CLEARANCE

***IF THERE IS STILL AN ISSUE WITH CLEARANCE TO THE FLOOR, INSTALL THE INCLUDED
TRANSMISSION SPACERS AS WELL**