


2016+ Camaro 1-Piece CV Driveshaft

Not checking this will void the warranty:

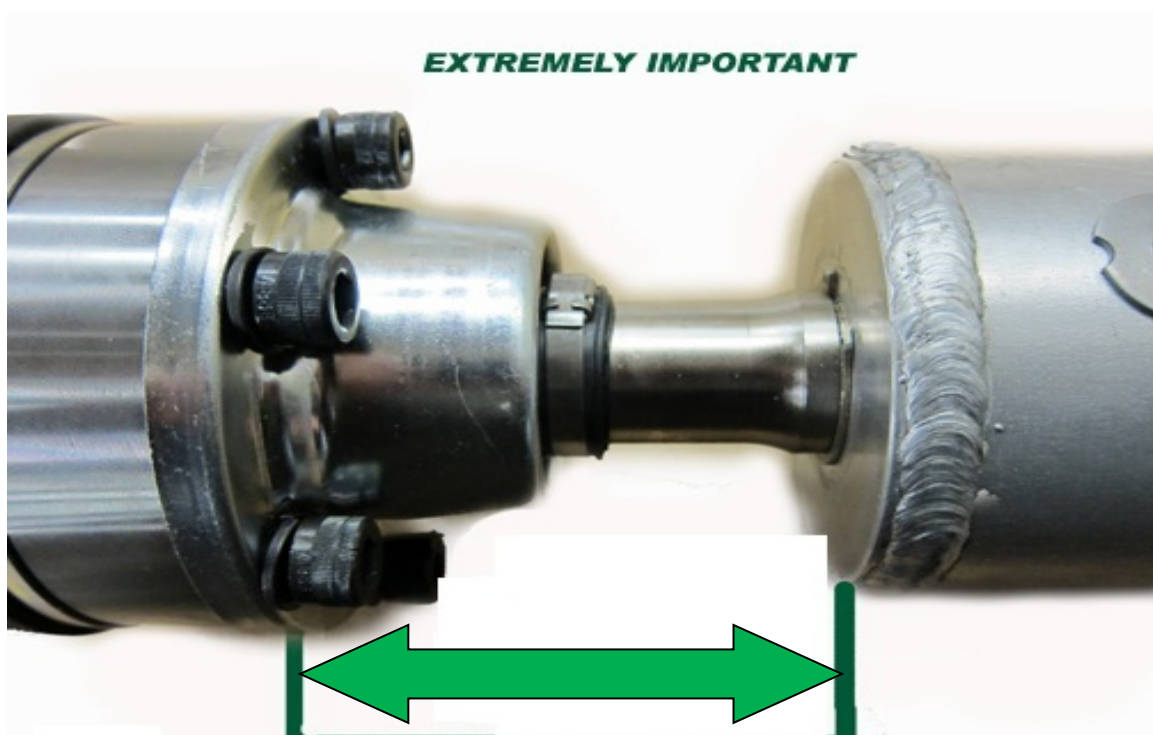

Driveshaft CV Clearance MUST BE CHECKED after installation.

This measurement must be between 3.25" – 3.75"

If dimension is not within the allowed range, do not run the driveshaft

ALUMINUM DRIVESHAFTS

Some cars have a fuel tank bolt that can contact the center of the driveshaft.

Check for ample clearance before installing driveshaft and driving car.

Adapter plate Hardware Torque:

Front (All): (3) M12 Bolts 70 ft-lbs / (6) M10 Bolts 57 ft-lbs

Rear (Stock Differential): (3) M12 Bolts 70 ft-lbs / (4) 3/8 Bolts 54 ft-lbs