


## Camaro ZL1 1-Piece CV Driveshaft

## Not checking this will void the warranty:

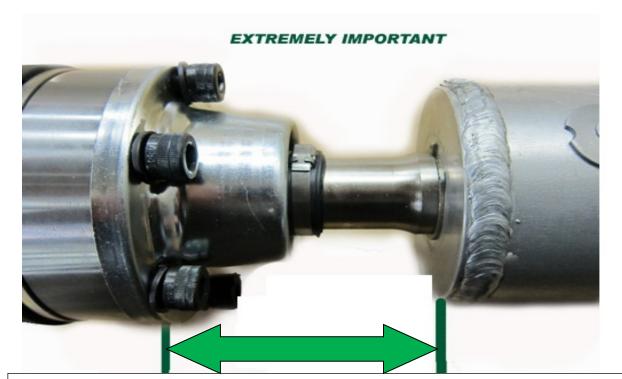

Driveshaft CV Clearance <u>MUST BE CHECKED</u> after installation. Camaro ZL1 (Auto / Manual) must be between <u>3.25" – 3.75"</u> If dimension is not within the allowed range, do not run the driveshaft

## **Adapter plate Hardware Torque:**

Front (All): (3) M14 Bolts 101 ft-lbs / (6) M10 Bolts 57 ft-lbs Rear (Stock Differential): (3) M14 Bolts 101 ft-lbs / (4) 3/8 Bolts 54 ft-lbs