


## Holden Commodore VE-VF Sedans/Utes 1-Piece CV Driveshaft

**Not checking this will void the warranty:**

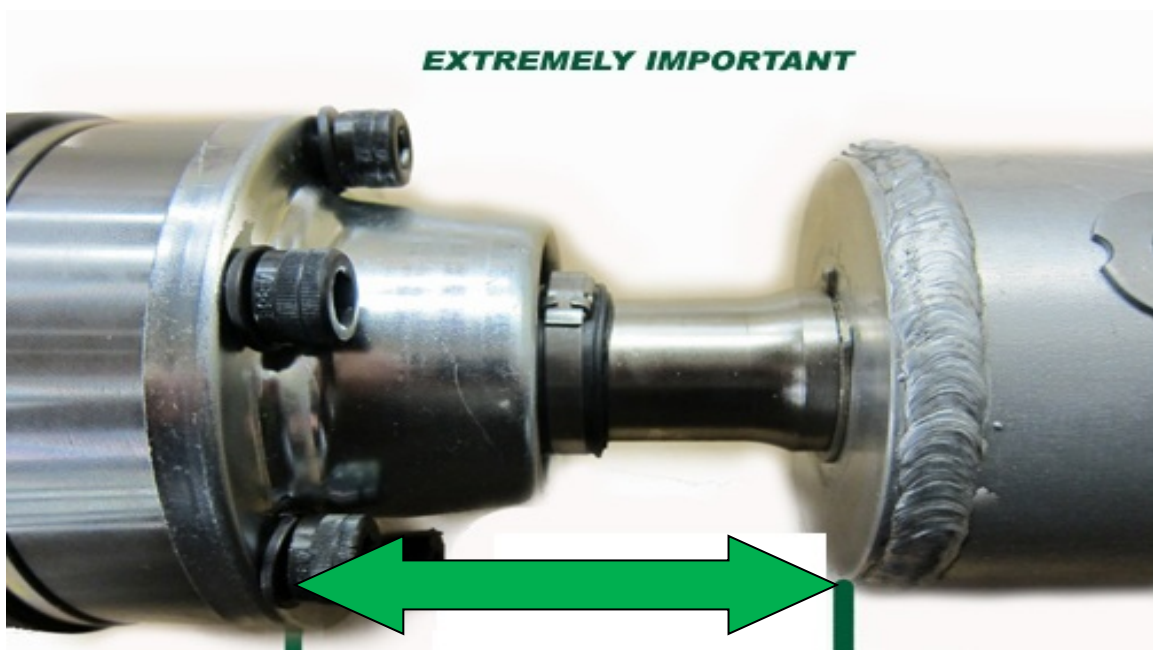

Driveshaft CV Clearance **MUST BE CHECKED** after installation.  
This measurement must be between **3.25" – 3.75"**  
If dimension is not within the allowed range, do not run the driveshaft

**Adapter plate Hardware Torque:**  
Front (All): (3) M12 Bolts 70 ft-lbs / (6) M10 Bolts 57 ft-lbs  
Rear (Stock Differential): (3) M12 Bolts 70 ft-lbs / (4) 3/8 Bolts 54 ft-lbs