



## Rapid Repair Kit

Gyprock Rapid Repair Kit is a convenient pack of Gyprock products that contains the essential products needed when making plasterboard repairs. The Gyprock Rapid Repair Kit has all the products and tools required to repair minor nicks and cracks to larger holes in plasterboard walls and ceilings. The kit contains:

- 1kg bag of Gyprock Rapid Patch
- 2 x Gyprock plasterboard panels for larger holes - 150mm x 150mm
- Gyprock Easy Tape – 20 metres
- 100mm broadknife
- Sanding block
- Mixing bucket
- Expert instructions that are easy to follow

## Recommended Use

Gyprock Rapid Repair Kit is a complete preparation kit for making repairs to plasterboard wall and ceilings. It is suitable for finishing nicks, scratches and holes up to 150mm x 150mm. Tools that may be useful in conjunction with Rapid Repair Kit include items such as a hand saw, trimming knife, pencil, dust mask and eye protection.

## Important

- Use Gyprock Repair Panels for holes and repairs. larger than 150mm x 150mm.
- Follow instructions carefully.
- Ensure surfaces are free from dust and dirt.
- Always use clean containers and equipment.
- Replace lid when not in use.

## Storage

Store bags of compound in a dry environment, protected from the weather and out of direct sunlight. Tear bag open from top corner to dispense compound. Unused product which has been mixed with water should be discarded. Unused product in powder format should be stored in original bag: roll the top of the bag to loosely seal, and store in an airtight container.



## Product Features




### DIY Range

Professional quality in convenient pack sizes.



### Complete Kit

Everything you need to do the job



### Repairs

Used for repairs and maintenance



### Australian Made and Owned

Licensed by Australian Made Campaign Ltd

Gyprock Rapid Repair Kit Specifications	
Feature	Description
Packaging	Re-sealable pail
Shelf Life	12 months from date of manufacture
Specific Gravity	2.3-2.4
VOC Content (as specified by GBCA)	2g/L as VOC content per material
Product Manufacture	Gyprock Rapid Repair Kit is manufactured by CSR Gyprock in Australia and made to stringent product specifications.




## Plasterboard Finishing

Jointing and finishing of Gyprock plasterboard interior installations is to be carried out in accordance with **FIGURE 1** and **TABLE 1** in this document, and the following details, so as to provide a smooth surface for decorating. Stopping and external corner beads are to be applied to all edges subject to damage. A Level 4 Finish is generally the accepted level of finish for residential construction as detailed in AS/NZS2589.1 and is also recommended for commercial construction. This requires a three-coat system, consisting of:

- Tape and tape coat
- Second coat and
- Finish (or topping) coat.

**FIGURE 1: SELECTING A LEVEL OF FINISH**

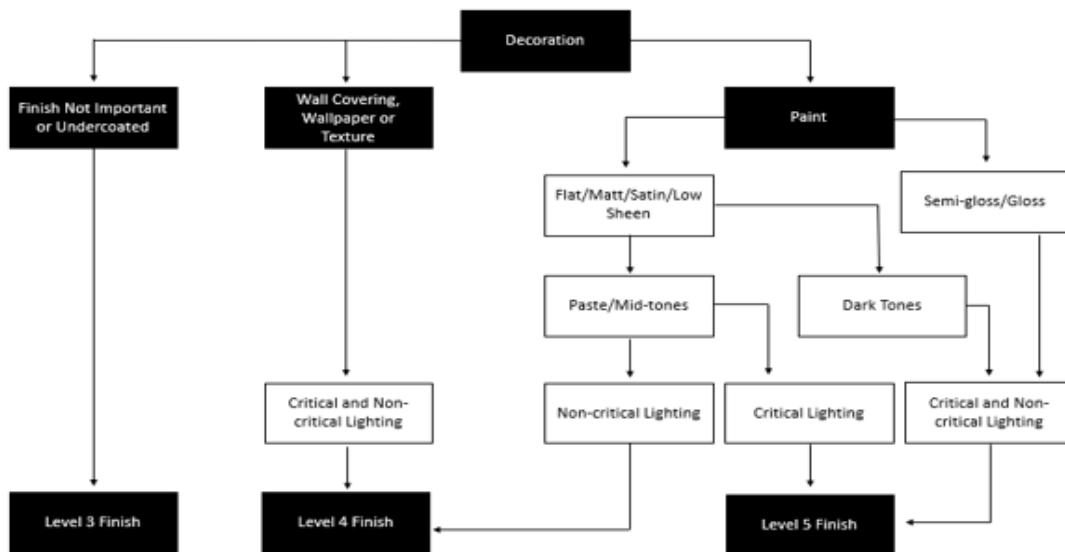

**TABLE 1: JOINTING COMPOUND SELECTION – HAND OR MECHANICAL**

Tape Coat Any of the following:		Second Coat Any of the following:		Finish Coat Any of the following:	
Product	Recoat Time	Product	Recoat Time	Product	Recoat Time
Base Coat 20*	35 mins	Base Coat 20*	35 mins	Jointmaster	24 hr
Base Coat 45*	60 mins	Base Coat 45*	60 mins	Ultra-Top	24 hr
Base Coat 60*	80mins	Base Coat 60*	80mins	Gold	24 hr
Base Coat 90*	120mins	Base Coat 90*	120mins	Easy-Finish	24 hr
Ultra-Base MR 60*	75 mins	Ultra-Base MR 60*	75 mins	Easy-Flow	24 hr
Easy Base	24 hr	Easy Base	24 hr	Less Mess Multi-Purpose	24 hr
Less Mess Multi-Purpose	24 hr	Less Mess Multi-Purpose	24 hr		
Easy- Flow	24 hr	Easy-Flow	24 hr		
Wet Area Base Coat	12-24 hr	Wet Area Base Coat	12-24 hr		

\*Setting type compound. Do not use a setting compound over a drying type compound.  
For protected exterior applications, use Wet Area Base Coat or Ultra-Base MR 60 for tape and second coat, followed by a Gyprock Finish Coat.



## Mixing

1. Ideal mix ratio is 1 cup (260 grams) Rapid Patch to 150mls clean water
2. Mix well to a creamy consistency and use immediately
3. Working life is around 20 minutes. Discard mix after set commences

## Application

### Small Cracks and Defects

1. Fill and allow to set for approximately 20 minutes before sanding.
2. Use a thicker mix for deep fillings

### For Holes Up to 25mm

1. Fill hole and allow to set
2. Cover hole with Gyprock Easy Tape
3. Apply a second coat of Rapid Patch allowing it to dry then sand, ready for painting.

For information on repairing larger holes in plasterboard walls and ceilings, please refer to the [Repairing Gyprock DIY Guide](#).

## Painting

Apply all paints in accordance with paint manufacturer's recommendations.

## Installing to Standards

Installing to Standards AS/NZS2589: Gypsum linings – Application and Finishing outlines the procedures for jointing and finishing of Gyprock plasterboard in conjunction with additional details contained in Gyprock Technical Literature.



Licensed by Australian Made Campaign Limited to use the Australian Made Logo.



Verified by an independent conformity assessment body to meet the environmental, health and social/ethical criteria of the GECA Panel Boards standard



Gyprock plasterboard products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system.

## Health and Safety

Refer to the Safety Data Sheet for this product which is available from [www.gyprock.com.au](http://www.gyprock.com.au) or contact:

CSR Gyprock  
Trinita 3, 39 Delhi Rd, North Ryde NSW 2113  
Australia Phone: **131 744**  
New Zealand Phone: **0800 277 123**

## Resources

For further information on this product please visit [www.gyprock.com.au](http://www.gyprock.com.au) or refer to the Gyprock Red Book. For technical support, contact:

**DESIGNLINK™**

PHONE: 1800 621 117

## Manufactured For Life Warranty

Gyprock products are manufactured for life with all CSR products designed to achieve optimal performance when part of a CSR integrated system. Gyprock continues to lead the market with premium quality products which are the preferred choice of plastering professionals. Gyprock plasterboard products are manufactured to the Australian Standards AS2588 providing confidence in quality of product and support. For details on our product warranty, please log onto [www.gyprock.com.au/warranty](http://www.gyprock.com.au/warranty), or contact us on **1300 306 556**.