




# PoE-7352-48T-800W

48GE + 4 10G SFP + console + USB, Managed Ethernet Switch with PoE

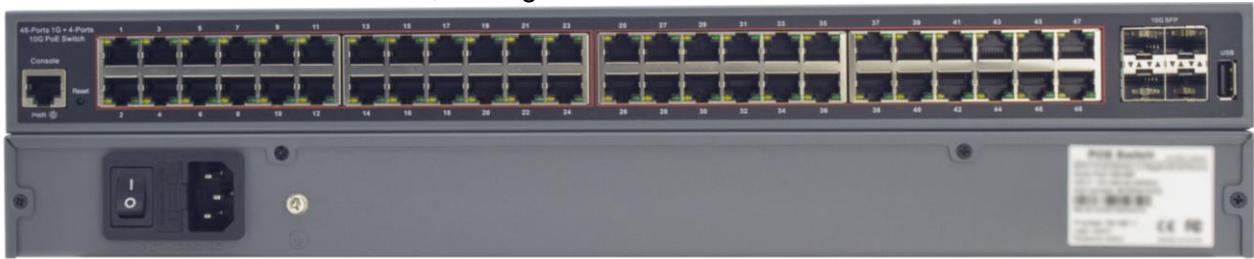

## Specifications

Item	Description	
model	PoE-7352-24T-800W	
Specifications	Managed POE Switch with Console port, 48 RJ45 10/100/1000M POE ports and 4 10G SFP ports, 800W built-in power(100-240VAC input), POE ports support IEEE802.3af/at and AI watchdog function, No.1-4 ports support IEEE802.3bt 95W, 19in	
LED Indicators	PWR、PoE、Link/Act	
Input voltage	100V~240VAC, 50/60Hz	
Ethernet Standard	IEEE 802.3 / 802.3u / 802.3ab / 802.3x / 802.3z / 802.3af/at/bt / 802.ad	
MAC address table	32K	
Backplane bandwidth	176Gbps	
Packet forwarding rate	130.944Mbps	
POE Pin assignment	IEEE 802.3af/at:2 pairs V+ (RJ45 Pin 1, 2), V- (RJ45 Pin 3, 6) IEEE 802.3bt :4 pairs V+ (RJ45 Pin 1, 2), V- (RJ45 Pin 3, 6), V+ (RJ45 Pin 4, 5), V- (RJ45 Pin 7, 8)	
Operating temperature	0℃~40℃	
Storage temperature	-40℃~70℃	
Relative humidity	0%~90% (non-condensing)	
Product	size	440mm×300mm×44mm
	weight	4.85 kg
Packing	size	490mm×360mm×85mm
	weight	5.5 kg
Outer box	size	51cm×28.5cm×39cm
	Q'TY	3 PCS
	weight	17.3 kg
<b>Default management factory value</b>		
Console	115200-8-N-1	
IP address(web or telnet)	192.168.1.1	
Default username	admin	
default password	Admin	

### Centro Technology Limited

USA Office:15322 E Valley Blvd, City of Industry, CA91746

Phone:(626)391-8868

China Office:4th Floor; Chashu 1#, Area B, HuaFeng 1st Technology, Sanwei, Hangcheng, Baoan, Shenzhen

Phone:0755-23200933

Website:www.centropower.com

Email:info@centropower.com