Make ideas real



R&S®UDS DIGITAL MULTIMETERS

Built for accuracy, designed for ease



Ideal for:	
Engineering lab	General purpose
Production testing	Education

W	
Key specifications	
Measurement range	DC to 100 kHz
Digit resolution	up to 61/2 digits
Basic DC accuracy	0.0075%
Resolution	100 nV, 10 nA, 0.1 mΩ, 0.1 pF, 1 Hz, 0.1°C
Reading rate	up to 200 readings/s
Measurement counts	up to 2000000 counts


The R&S®UDS family of compact digital multimeters is engineered for both general purpose and production line environments. Renowned for versatility and precision, the multimeters can simultaneously display three measurement functions, streamlining test workflows. Beyond the standard 12 measurement functions, the multimeters have built-in statistical and mathematical functions and an intuitive user interface for smooth and efficient testing.

Your benefit	Features of the R&S®UDS
See more at a glance	 ▶ Simultaneous display of three measurements (DC, AC and statistics) ▶ QVGA color display for excellent readability ▶ Limit testing directly on the display for easy minimum/maximum analysis
Versatile functions	 Mathematic functions ▶ Built-in statistics ▶ Two-wire and four-wire measurements ▶ Limit testing
Remote controllability	 ▶ Remote control with SCPI based commands ▶ Ethernet interface (LAN) with integrated web server ▶ Driver packages



Simultaneous measurement display

Simultaneous display of three measurements, including DCI and ACI at the same time

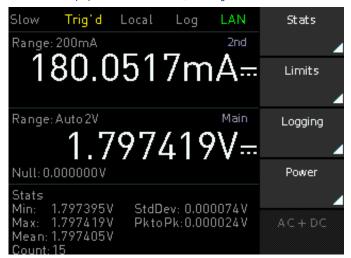

Ideal for industrial environments


Easily fits into the R&S®HZC95 19" rackmount kit for production environments




Designation	Туре	
Base unit		
Digital multimeter, 5½	R&S®UDS500	
Digital multimeter, 5½, with GPIB interface	R&S®UDS500-G	
Digital multimeter, 6½	R&S®UDS600	
Digital multimeter, 61/2, with GPIB interface	R&S®UDS600-G	
Accessories		
Silicon test lead, banana to banana, length: 1 m (set of 5, color: blue)	R&S®HZ10B	
Silicon test lead, banana to banana, length: 1 m (set of 5, color: red)	R&S®HZ10R	
Silicon test lead, banana to banana, length: 1 m (set of 5, color: black)	R&S®HZ10S	
System components		
19" rack adapter, 2 U, for R&S®NGE100B/ NGC100/NPA/UDS and R&S®HMC series	R&S®HZC95	

Limit testing

Programmable test functions ideal for minimum and maximum analyses

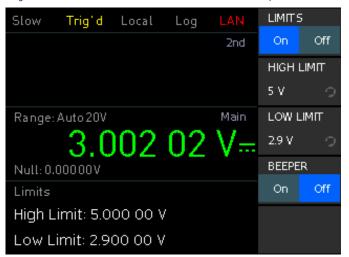

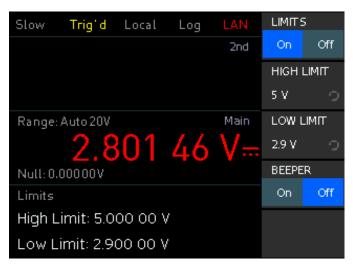

APPLICATIONS

General purpose

Engineering lab

Production environment

Rohde & Schwarz

www.rohde-schwarz.com | www.rohde-schwarz.com/support | www.training.rohde-schwarz.com R&S* is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners
R&S*UDS Digital Multimeters
PD 3673.2920.32 | Version 01.00 | April 2025 (sk)
Data without tolerance limits is not binding | Subject to change
© 2025 Rohde & Schwarz | 81671 Munich, Germany