

TOTAL

One-Stop Tools Station

TOTAL

ROTARY HAMMER

TH118366, UTH118366

TH118366-6, TH118366-8, TH118366S

INDUSTRIAL



1800W

Safety Instructions



WARNING Read all safety warnings and all instructions. Failure to follow all warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference

The term “power tool” in the warnings refer to your mains operated (corded) power tool or battery operated (cordless) power tool.

Work area

a) Keep work area clean and well lit. Cluttered and dark areas invite accidents.

b) Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.

Keep children and bystanders away while operating a power tool. Distractions can cause you to lose control.

Electrical safety

a) Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.

b) Avoid body contact with earthed or grounded surfaces such as pipes, radiators, ranges and refrigerators. There is an increased risk of electric shock if your body is earthed or grounded.

c) Do not expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.

d) Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.

e) When operating a power tool outdoors, use an extension cord suitable for outdoor use. Use of a cord suitable for outdoor use reduces the risk of electric shock.

f) If operating a power tools in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

3) Personal safety

a) Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in serious personal injury.

- b) Use safety equipment. Always wear eye protection. Safety equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
 - c) Avoid accidental starting. Ensure the switch is in the off position before plugging in. Carrying power tools with your finger on the switch or plugging in power tools that have the switch on invites accidents.
 - d) Remove any adjusting key or wrench before turning the power tool on. A wrench or a key left attached to a rotating part of the power tool may result in personal injury.
 - e) Do not overreach. Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.
 - f) Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.
 - g) If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. Use of these devices can reduce dust related hazards.
- 4) Power tool use and care
- a) Do not force the power tool. Use the correct power tool for your application. The correct power tool will do the job better and safer at the rate for which it was designed.
 - b) Do not use the power tool if the switch does not turn it on and off. Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
 - c) Disconnect the plug from the power source before making any adjustments, changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
 - d) Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool. Power tools are dangerous in the hands of untrained users.
 - e) Maintain power tools. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tools operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
 - f) Keep cutting tools sharp and clean. Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control;
 - g) Use the power tool, accessories and tool bits etc., in accordance with these instructions and in the manner intended for the particular type of power tool, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from intended could result in a hazardous situation.
- 5) Service

- a) Have your power tool serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

Special Warning for Electric hammer

- Wear ear protection. Exposure to noise can cause hearing loss.
- Use auxiliary handle with the tool. Loss of control can cause personal injury.

Additional safety instructions for your hammer drill

- Wear protective goggles.
When working, sparks or flying splinters, shavings, and dust can cause loss of vision.

Symbol



“WARNING – To reduce the risk of injury, user must read instruction manual”

Environmental Protection



Waste electrical products should not be disposed of with house hold waste, Please recycle where facilities exist. Check with your local Authority or retailer for recycling advice.

Product specifications


| Model No.: | TH118366 | UTH118366 | TH118366S (SAA PLUS) | TH118366-6 (ISRAEL PLUG) | TH118366-8 (BS PLUS) |
|--------------------|-----------|-----------|-------------------------|-----------------------------|-------------------------|
| Rated voltage: | 220-240V~ | 110-120V~ | 220-240V~ | 220-240V~ | 220-240V~ |
| Frequency: | 50/60Hz | 60Hz | 50/60Hz | 50/60Hz | 50/60Hz |
| Rated power input: | 1800W | 1800W | 1800W | 1800W | 1800W |
| No-load speed: | 850/min | 850/min | 850/min | 850/min | 850/min |
| Impact rate: | 4200/min | 4200/min | 4200/min | 4200/min | 4200/min |
| Impact energy: | 7.0J | 7.0J | 7.0J | 7.0J | 7.0J |
| Drilling capacity: | | | | | |
| Concrete: | 36mm | 1-7/16" | 36mm | 36mm | 36mm |
| Steel: | 13mm | 1/2" | 13mm | 13mm | 13mm |
| Wood: | 42mm | 1-5/8" | 42mm | 42mm | 42mm |

Degree of protection  / II

Intended Use

The machine is intended for hammer drilling in concrete, brick and stone. It is likewise suitable for drilling without impact in wood, metal, ceramic and plastic.

Product Elements

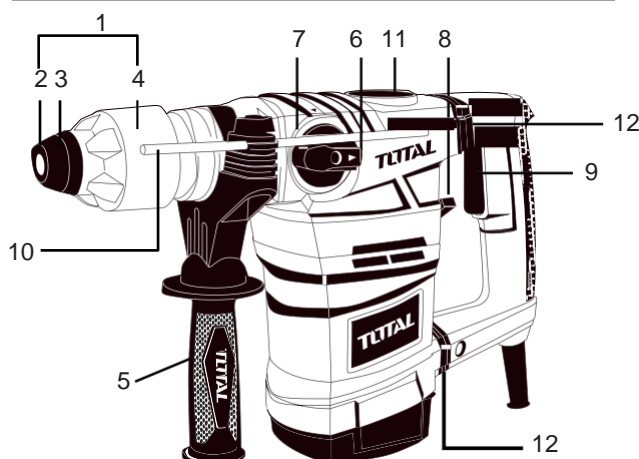

1. Replacement drill chuck
2. Tool holder
3. Dust protection cap
4. Locking sleeve
5. Auxiliary handle
6. Unlocking button
7. Operational mode selection switch 1
8. Operational mode selection switch 2
9. On/Off switch
10. Depth stop
11. Grease cover
12. Anti-vibration system

Not all the accessories illustrated or described included in standard delivery.

! For Your Safety



Working safely with this machine possible only when the operating and safety information are read completely and the instructions contained therein are strictly followed.



Before using for the first time, ask for a practical demonstration.

If the cable is damaged or cut through while working, do not touch the cable but immediately pull the mains plug.

Never use the machine with a damaged cable.

Wear safety glasses, protective gloves and sturdy shoes.

Wear ear protection to prevent damage to your hearing.

The machine must not be damp and must not be operated in a wet environment.

Keep long hair away from the machine.

Do not operate while wearing loose clothing.

- Connect the mains plug only when the tool is switched off. After using, pull the mains plug.
- Always direct the cable to the rear away from the machine.
- Do not carry the machine by the cable.
- When working with the machine, always hold it firmly with both hands and provide for a secure stance.
- During pauses in the work, when not in use or during work on the machine itself (e.g., changing of the working tools, repairs, cleaning, adjustment), pull the mains plug.
- Persons under 16 year of age are not permitted to operate this machine.
- Keep the tool accessories out of the reach of children.
- Only use original accessories.

Before Use



Be careful of hidden electrical lines or gas and water pipes. Check the working area, e.g. with a metal detector.

Always use the correct supply voltage!

The voltage of the power source must agree with the value given on the nameplate of the machine.

Tool Changing

Take care that the dust protection cap 3 is not damaged when changing tools.

SDS-plus Tools



The SDS-plus tool is designed to be freely movable. This causes eccentricity when the machine is offload. However, the drill automatically centres itself during operation. This does not affect drilling precision.

Inserting

Clean the tool before inserting.

Insert the dust-free tool into the tool holder 2 with twisting until it latches.

The tool locks itself. Check the locking by pulling on the tool.

Removing

Pull the locking sleeve 4 to the rear and hold while removing the tool .

Tools without SDS-plus

Do not use tools without SDS-plus for hammer drilling or chiselling!

Use only screwdriver bits that fit the screw heads. Screwdriver bits may also be inserted without a bit holder.

Putting into Operation

Operation

Switching on: Press the on- off switch 9

Switching off: Release the on- off switch 9

Working Instructions

Overload Clutch

If the drill bit becomes jammed or caught, the drive to the drill spindle is interrupted.

- Because of the forces that occur as a result, always hold the machine with both hands and take a secure stance. The machine should be used only with an auxiliary handle.

Auxiliary Handle

You will be able to obtain a safe position when working by rotating the handle attachment. Loosen and turn the

handle attachment in an anticlockwise direction.

The tighten the handle attachment.

Depth Stop

Loosen the winged screw on the auxiliary handle 5.

Adjust the drilling depth 10 on the depth stop .

Retighten the winged screw.


Operating Modes





Warning!

**When switching operation modes ,
Please trigger ON/OFF switch slightly.**

1. Hammer drill mode:

Turn the mode selector witch 8 to “  “ (Fig.

1) ,and turn switch 7 to the “  “ direction.(Fig.3).



Fig(1)






Fig (3)

2. Chisel mode

Turn the mode selector switch 8 to “  “ (Fig.

1),and then turn switch 7 to the “  “ direction.(Fig.4)




Fig (1)




Fig (4)

3. Drill mode

Turn the mode selector switch 8 to “  “, (Fig.2),then

turn switch 7 to “  “direction. (Fig. 3).



Fig (2)




Fig (3)




Fig (3)

4. Chisel vario-lock mode

Vario-Lock position for adjustment of the chiselling position .

5. Sharpening the Chiselling Tools

With sharpened insertion tools, one achieves good working performance and long service life. Therefore, sharpen the chisel regularly. Sharpen the tool on a grinding wheel (e.g. alumina oxide) with constant water supply.

Maintenance and Cleaning

Before any work on the machine itself, pull the mains plug.

For safe and proper working, always keep the machine and the ventilation slots clean.

Clean the tool mount daily.

Replacing the Dust Protection Cap


Damaged dust protection caps should be replaced as possible since dust that enters the tool holder can cause malfunctions.

Pull back and hold the locking sleeve 4 .pull off the dust cap with a suitable tool.

With the locking sleeve pulled back, pull on the new dust cap until it sits firmly over the tool holder and the locking sleeve can again be slid forward.

If the machine should happen to fail despite the care taken in manufacture and testing, repair should be carried out by an authorised customer services agent for TOTAL power tools.

Environmental Protection



Recycle raw materials instead of disposing as waste.

Machine, accessories and packaging should be sorted for environment-friendly recycling.


These instructions are printed without chlorine.

The plastic components are labelled for categorized recycling.

TH118366,UTH118366,TH118366-6,TH118366-8,TH118366S Spare part list

| No. | Part Description | Qty | No. | Part Description | Qty | No. | Part Description | Qty |
|-----|----------------------------|-----|-----|---------------------------------------|-----|-----|-----------------------|-----|
| 1 | Steel Ring 17.5x2 | 1 | 40 | Gear Box | 1 | 79 | Rubber Column | 1 |
| 2 | Iron Head | 1 | 41 | Oil Cover | 1 | 80 | Stell Ball 4 | 1 |
| 3 | Steel Frame | 1 | 42 | O-ring19x3.1 | 1 | 81 | Third Function Button | 1 |
| 4 | Spring 30.2x1.8x76 | 1 | 43 | Damping Rubber | 1 | 82 | Inner Cover | 1 |
| 5 | Inner Hexogon Screw M5x22 | 4 | 44 | Damping Spring | 2 | 83 | Bearing6001 | 1 |
| 6 | Spring Washer 5 | 8 | 45 | Damping Board | 1 | 84 | Bearing Board | 1 |
| 7 | Washer 5 | 8 | 46 | Damping Screw M8*36 | 2 | 85 | Spring Washer 4 | 2 |
| 8 | Cylinder Case | 1 | 47 | Dial The Torsion Shaft | 1 | 86 | Screw M4*12 | 2 |
| 9 | Oil Seal FB35x51x6 | 1 | 48 | Washer 17.5x11.2x0.5 | 1 | 87 | Rotor | 1 |
| 10 | Big Washer 45*54.5*1 | 1 | 49 | Ring 18 | 1 | 88 | Bearing608 | 1 |
| 11 | Teleflex | 1 | 50 | Lock Cylinder | 1 | 89 | Screw ST4.8*65-F | 2 |
| 12 | Stell Ball 7.14 | 5 | 51 | Retaining Spring | 1 | 90 | Fan Guide | 1 |
| 13 | X-ring | 1 | 52 | Two Function Button | 1 | 91 | Stator | 1 |
| 14 | O-ring 11x2 | 3 | 53 | Flat Washer 4 | 1 | 92 | slice | 2 |
| 15 | Punch Hammer | 1 | 54 | Spring Washer 4 | 1 | 93 | Main House | 1 |
| 16 | Ring 35 | 1 | 55 | Cross pan head screw M4x14 | 1 | 94 | Damping Rubber | 1 |
| 17 | Bearing61907-RZ | 1 | 56 | Crankshaft | 1 | 95 | Brush Holder | 2 |
| 18 | Steel Ball 7.94 | 3 | 57 | Bearing 6003 | 1 | 96 | Carbon Brush | 2 |
| 19 | Cylinder | 1 | 58 | Ring 35 | 1 | 97 | Brush Box | 2 |
| 20 | Flat Key3x2.5x18 | 2 | 59 | Ring 17 | 1 | 98 | ScrewM5x50 | 4 |
| 21 | Plastic Range Ring 45x55x7 | 1 | 60 | Big Gear | 1 | 99 | Tail Cover | 1 |
| 22 | Washer47x38x1.5 | 1 | 61 | Spring 33x1.2 | 1 | 100 | Screw ST3.9x16 | 11 |
| 23 | Spring42x2x28 | 1 | 62 | Pin 8x18.7 | 1 | 101 | Screw M8x45 | 1 |
| 24 | Plastic sliding sleeve | 1 | 63 | Key Pin5x5x22 | 1 | 102 | Right Handle | 1 |
| 25 | Lock Range Sleeve | 1 | 64 | bearing | 1 | 103 | Switch | 1 |
| 26 | Spring 34x2.5x50 | 1 | 65 | Steel Sleeve 26x22x9 | 1 | 104 | Capacitance | 1 |
| 27 | Clutch | 1 | 66 | Oil Seal FB19x28x4.5 | 1 | 105 | Left Handle | 1 |
| 28 | Gamp gear | 1 | 67 | Cone gear shaft(10:35) | 1 | 106 | Nut M8 | 1 |
| 29 | O-ring19x3.1 | 1 | 68 | adjusting washer15x19x4.7 | 1 | 107 | Cable Board | 1 |
| 30 | Ring 28*1.6 | 1 | 69 | Bearing 6002 | 1 | 108 | Cable Cover | 1 |
| 31 | Rammer | 1 | 70 | Washer14.1x19x0.5 | 1 | 109 | Cable | 1 |
| 32 | O-ring19x3.1 | 2 | 71 | Steel Ball Tripping Flat Gear 39teeth | 1 | 110 | Hoop | 1 |
| 33 | Piston | 1 | 72 | Steel Ball 5 | 8 | 111 | Screw | 1 |
| 34 | Piston Pin6x24 | 1 | 73 | Tripping Fixed Plate | 1 | 112 | T-Shape Screw M8*50 | 1 |
| 35 | Connecting Rod | 1 | 74 | Steel Ring12.5X1 | 1 | 113 | Depth Ruler | 1 |
| 36 | screw | 1 | 75 | Tripping Activity Board | 1 | 114 | Auxiliary Handle Seat | 1 |
| 37 | Ring 47 | 1 | 76 | Spring 14.2X9X0.5X2.7 | 4 | 115 | Nut M6 | 1 |
| 38 | oil Plate | 1 | 77 | Nut 10x0.75 | 1 | 116 | Auxiliary Handle | 1 |
| 39 | Oil Bearing 30x47x9 | 1 | 78 | Bearing 627 | 1 | | | |

TH11836 UTH118366 TH118366-6 TH118366-8 TH118366S Exploding view

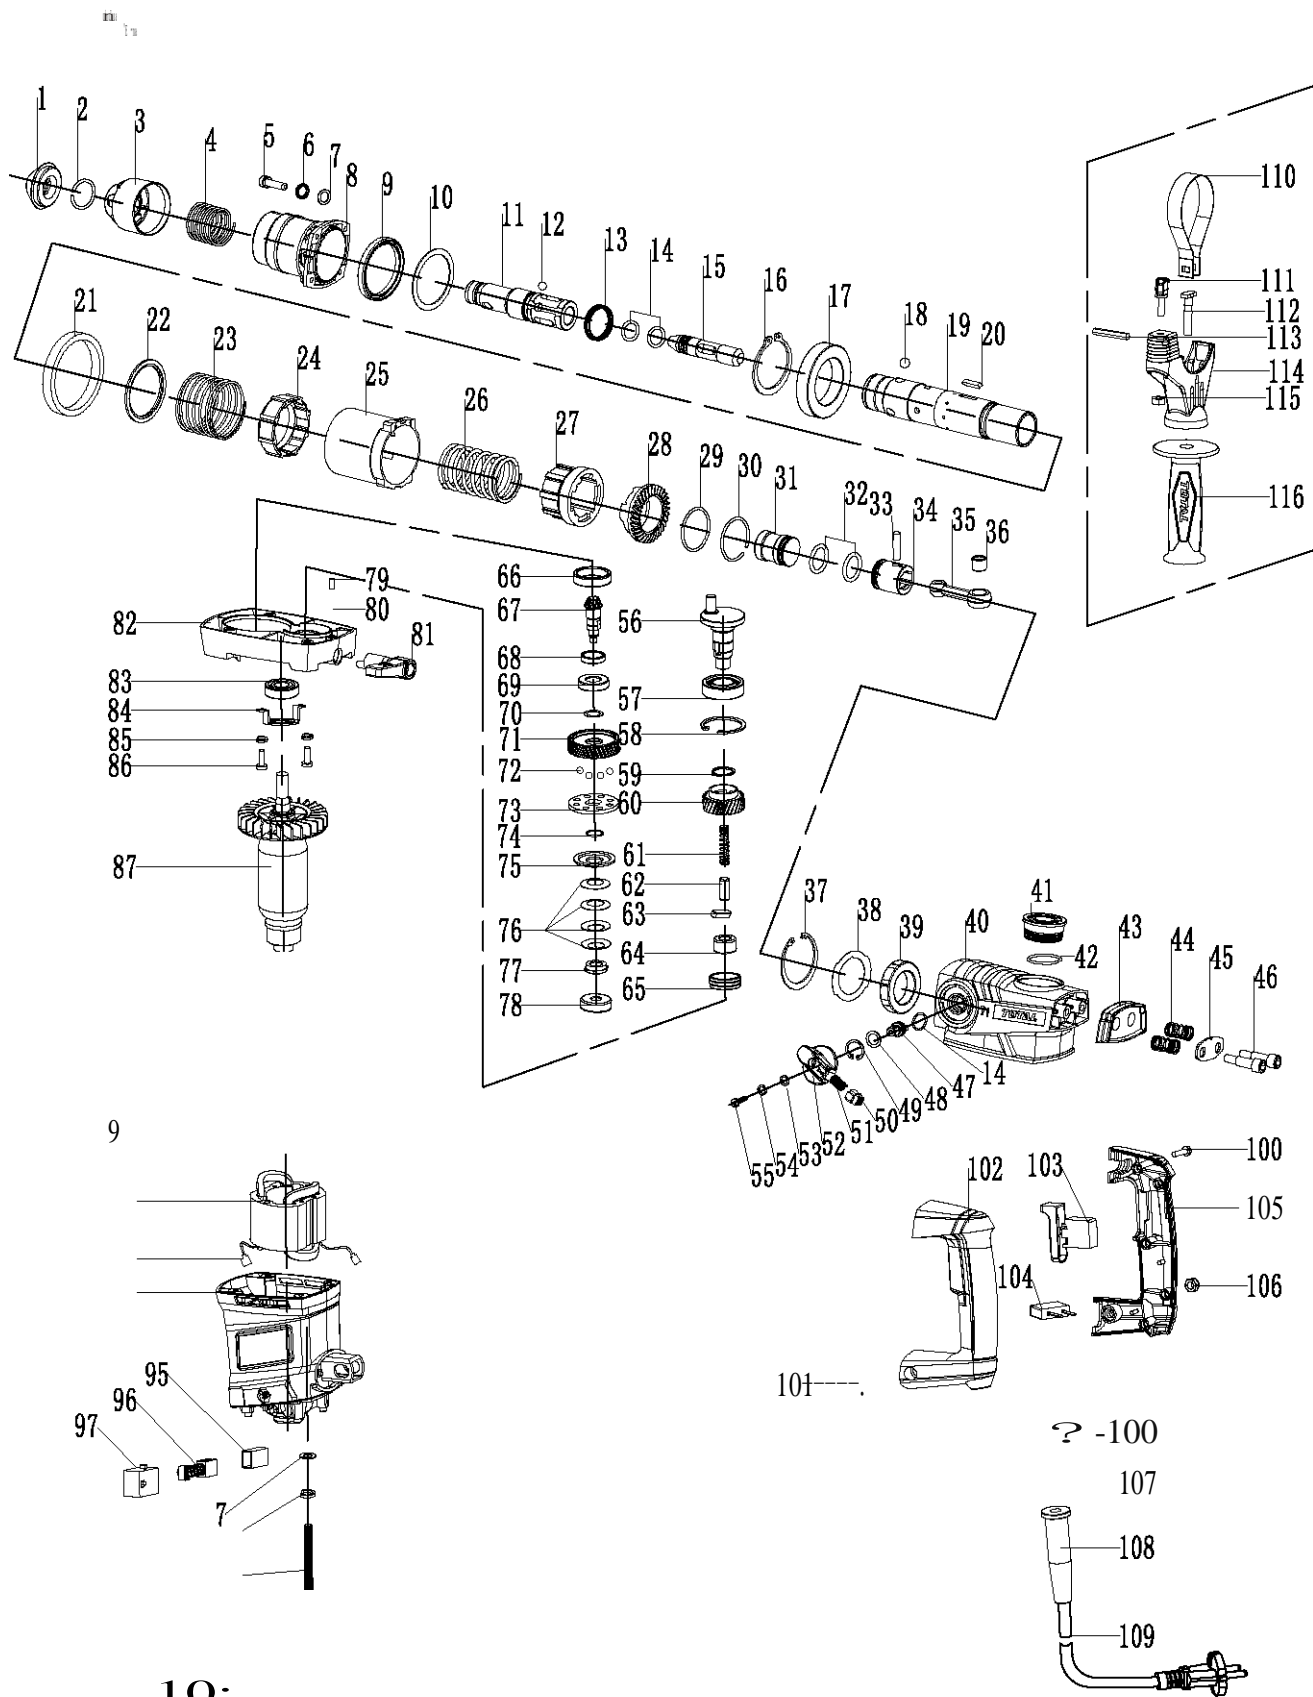

10;

TOTAL

ROTARY HAMMER


TH118366

UTH118366

TH118366-6

TH118366-8

TH118366S

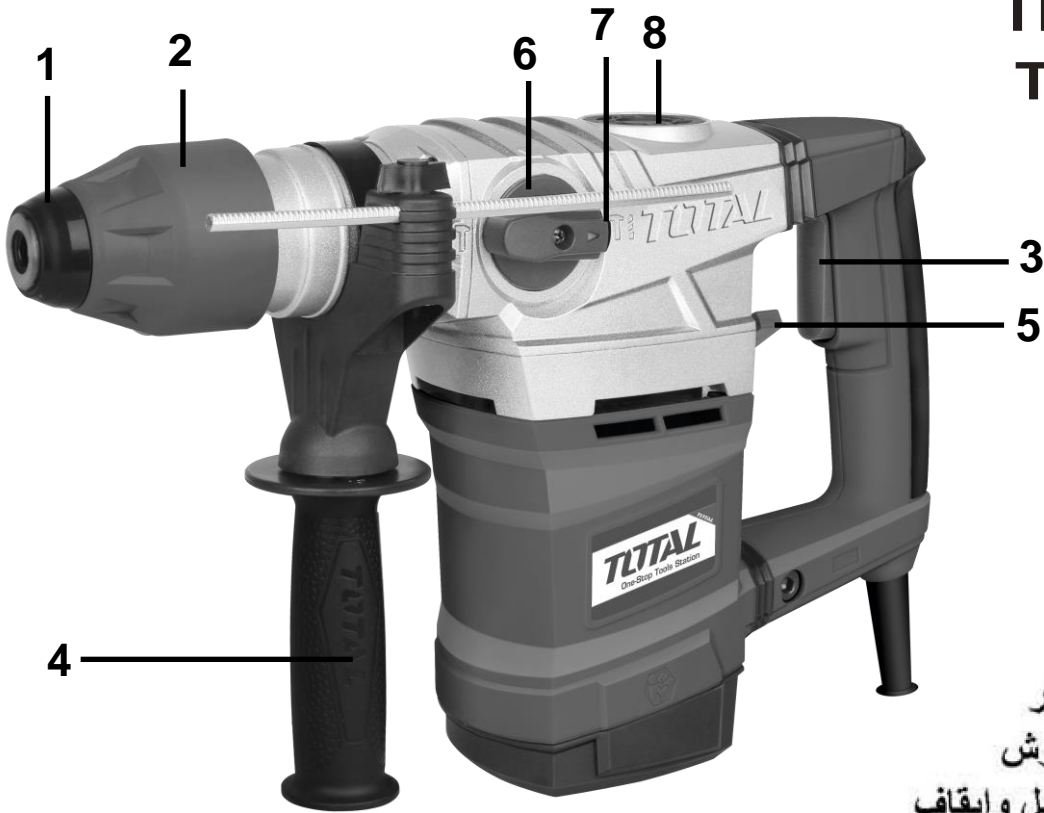


1. حارس غبار
2. ظرف شاكوش
3. مفتاح تشغيل وإيقاف
4. المقبض المساعد
5. توقف مطرقة
6. توقف مثقاب
7. دبّوس قفل
8. نظام إهتزاز

المنشأ صنع فى الصين

TOTAL

One-Stop Tools Station

TOTAL

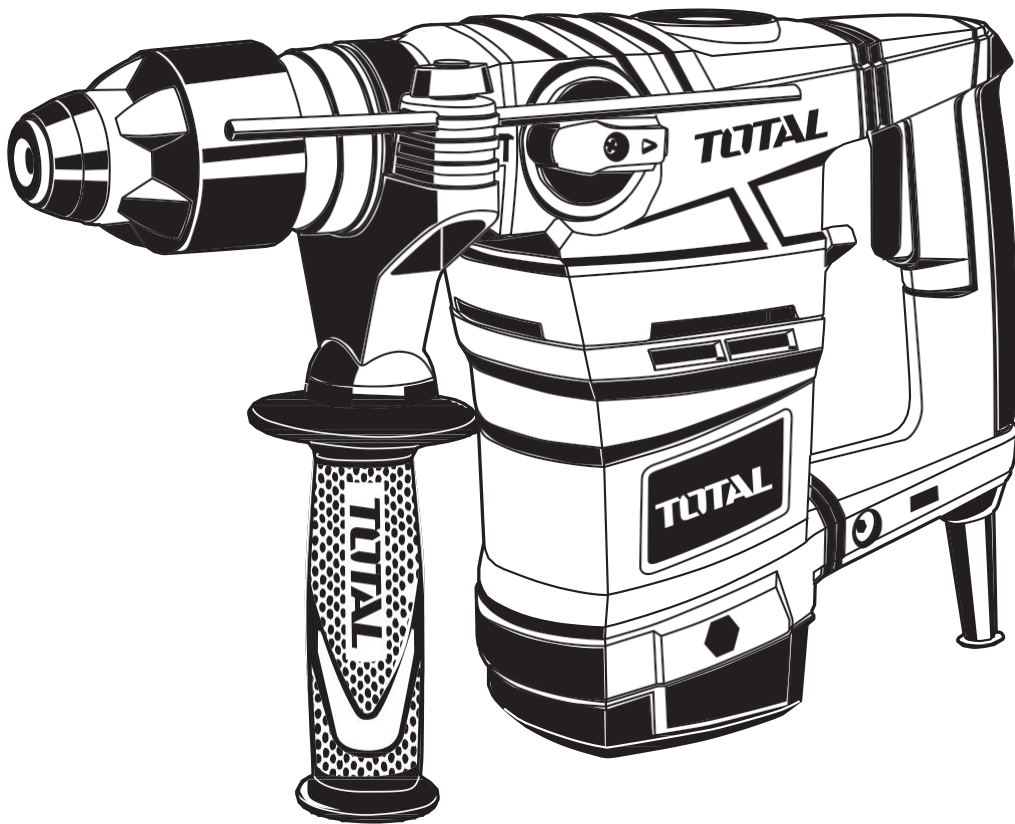

ROTARY HAMMER

www.totaltools.cn TOTAL
TOOLS CO., LIMITED MADE
IN CHINA T0317.V05

1800W