

iTECH2000A Jump starter bypass.


1. Connect the jump starter clamps into the iTECH2000A jump starter.



2. connect the positive clamp to the positive terminal of the cranking battery then followed by the negative clamp to the negative terminal.



3. Locate the jumpstart button on the side of the clamps and press it. (it is a small black round button on the side of the clamps) Once pressed the countdown timer will start.

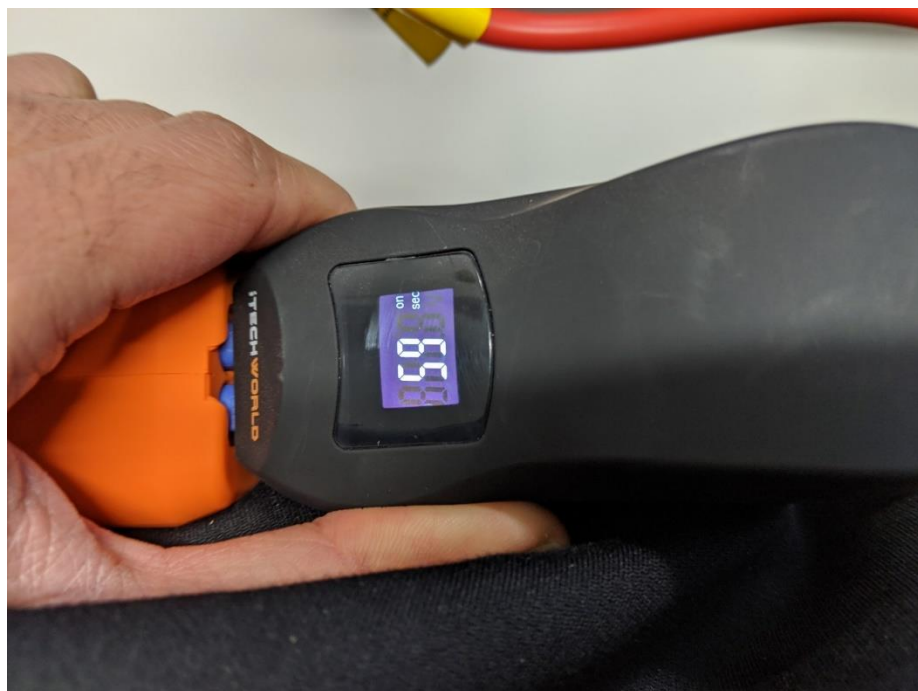

4. When the count down timer is started, press, and hold the jumpstart button until the clamps beep twice, and the display will change from the 60 second count down timer to displaying temperature again. There will be a small "on" symbol that will flash towards the top right of the temperature display. Once in this mode go and attempt to start the vehicle, please note in this mode, the safety features are bypassed at the clamps, the clamps will continuously supply power. Once the vehicle is started, remove the clamps from the jump starter first, then disconnect it from your vehicle's battery.

