


## KEY FEATURE

- 360° Omni-directional lighting.
- Ultra-bright: 120lm/W.
- 6-10KV internal surge protection.
- Come with 10-foot 18AWG cord and 120V plug.
- Built-in connector, outlet for connecting up to 7 pieces.
- Suitable for dry and damp location.
- Portable hook, easy to carry and quick install.
- Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- High quality led driver to ensure stable working situation.
- Waterproof rubber design for better waterproof performance.
- Operating temperature: -40°C/-40°F to 60°C/140°F.


## DETAILS

**150W**

**18000  
Lumens**



**Portable hook**  
Easy to carry and install  
Flexible with spring



**120lm/W**  
Ultra-bright  
EPISTAR LED



**Heavy-duty welded lamp cage**  
Steel stainless material  
Strong & durable



**120V USA plug with cord**  
Cord length: 10ft  
Cord type: 18AWG



**Ventilation air-flow heat sink**  
Better heat dissipation  
Extended working lifetime

## SPECIFICATION


SKU	Watt	Total Lumens	Led Quantity	Surge Voltage	CCT	Input Voltage	CRI	Power Factor	Operating Temperature	Metal Halide Equivalent
K5-II-150W	150W	18000LM	676	10KV	5000K	AC100-277V, 50-60Hz	>80	>0.9	-40 to 60	600W

## APPLICATOIN


- New Building Construction or Renovation.
- Maintenance or storage spaces in commercial or in situational facilitate.
- Short-term maintenance projects.
- Warehouses, factories, Exhibition halls and workshops.
- Highway toll stations and gas stations.



## DIMENSION

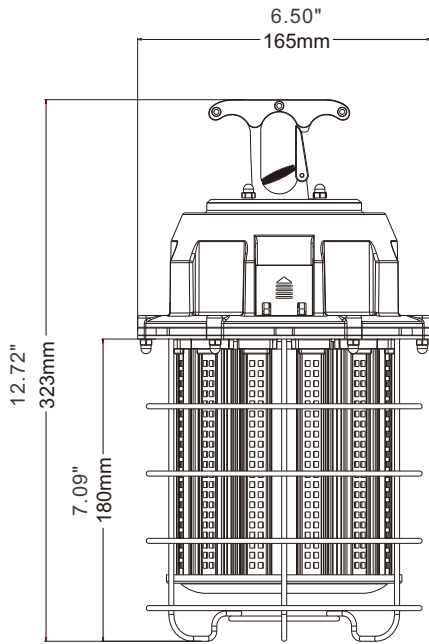

## PHOTOMETRICS

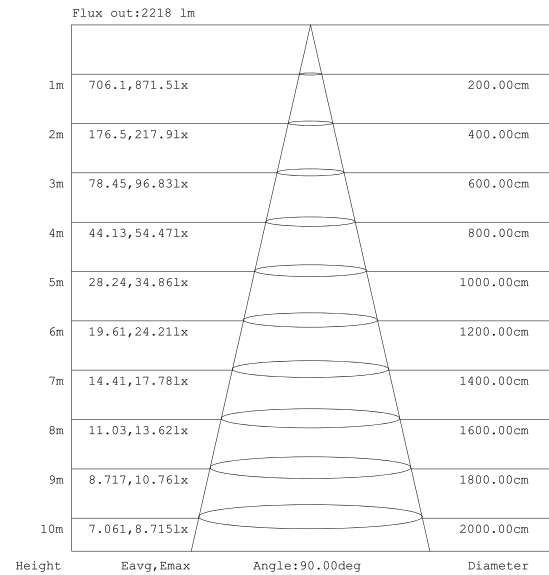

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## Connector Design

Can connect in series up to 7 pieces (LED lights only) or single using.



## PACKAGING

Power	150W
Net Weight	6.72lb
Master Carton	4 unit
Master Carton(G.W.)	33.73lb

