


KEY FEATURE

- 360° Omni-directional lighting.
- Ultra-bright: 120lm/W.
- 6-10KV internal surge protection.
- Come with 10-foot 18AWG cord and 120V plug.
- Built-in connector, outlet for connecting up to 7 pieces.
- Suitable for dry and damp location.
- Portable hook, easy to carry and quick install.
- Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- High quality led driver to ensure stable working situation.
- Waterproof rubber design for better waterproof performance.
- Operating temperature: -40°C/-40°F to 60°C/140°F.


DETAILS

60W

7200 Lumens



Portable hook
Easy to carry and install
Flexible with spring



120lm/W
Ultra-bright
EPISTAR LED



Heavy-duty welded lamp cage
Steel stainless material
Strong & durable



120V USA plug with cord
Cord length: 10ft
Cord type: 18AWG



Ventilation air-flow heat sink
Better heat dissipation
Extended working lifetime

SPECIFICATION


Item NO.	Watt	Total Lumens	Led Quantity	Surge Voltage	CCT	Input Voltage	CRI	Power Factor	Operating Temperature	Metal Halide Equivalent
RMS-K5-II-60W	60W	7200LM	270	6KV	5000K	AC100-277V, 50-60Hz	>80	>0.9	-40 to 60	250W

APPLICATOIN


- New Building Construction or Renovation.
- Maintenance or storage spaces in commercial or in situational facilitate.
- Short-term maintenance projects.
- Warehouses, factories, Exhibition halls and workshops.
- Highway toll stations and gas stations.



DIMENSION

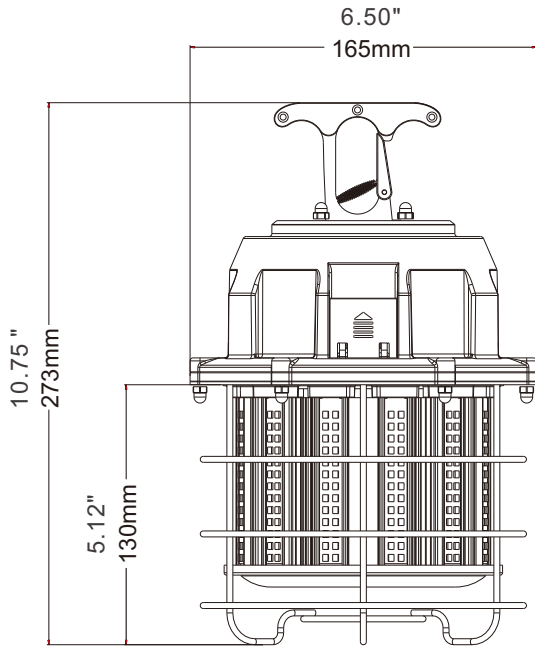

PHOTOMETRICS

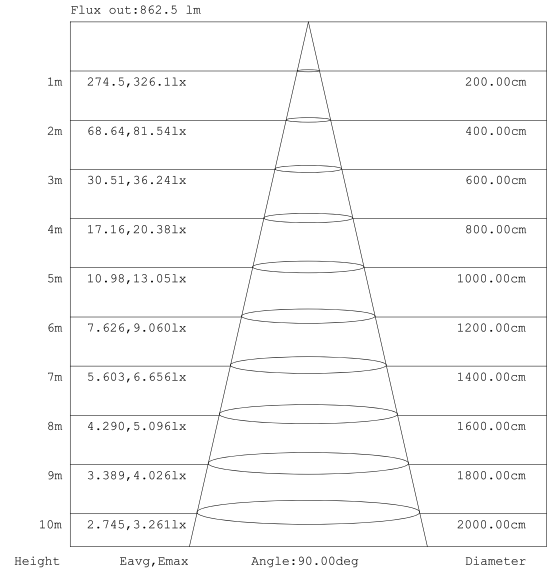

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Connector Design

Can connect in series up to 7 pieces (LED lights only) or single using.



PACKAGING

Power	60W
Net Weight	4.41lb
Master Carton	4 unit
Master Carton(G.W.)	23.81lb

