



GJIA

LED Wall Pack Light

60W / 80W / 100W/ 120W



The GJIA LED Wall Pack combines the look of a traditional wall pack with the benefits of LED. An efficient alternative to metal halide, these wall packs deliver bright, uniform light while providing energy savings and rebate eligibility. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact resistant borosilicate glass lens. An integrated photosensor comes standard for dusk-to-dawn control (Optional). It mounts directly to a standard junction box for easy retrofit of traditional fixtures.



5 years warranty



GJIA

WWW.GGJIA-LED.COM

Tel: +1(626)977-6424 E-mail: sales@ggjia-led.com



Features:

- Integrated 120-277V photosensor optional.
- Die-cast aluminum housing with impact resistant PC
- ETL approved for wet locations.
- Surface mounts to standard junction box.
- Instant energy savings and potential rebate eligibility.
- Up to 78% less energy than traditional metal halide.
- Long 50,000 hour rated life.
- Minimizes replacements and labor costs.
- Robust design protects the LEDs to withstand harsh outdoor environments.
- Easy installation and retrofit application




Specifications:

Model	RMS-WP-60W	RMS-WP-80W	RMS-WP-100W	RMS-WP-120W
Power	60W	80W	100W	120W
Luminous Flux	7200lm	9600lm	12000lm	14400lm
Luminous Efficacy	120lm/w			
Light Source	Epistar LED			
Operation Temp	-40°C to +45°C			
CTT	5000K			
CRI	>70			
Life Span	50,000 hours			
Voltage	100-277VAC/50-60HZ 200-480VAC available			
Beam Angle	120°			
PT	>0.95			
Warranty	5 Years			


Dimension:

Unit: mm

- L=364MM
- W=233MM
- H=163MM

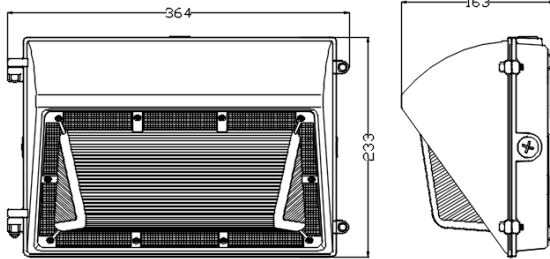


Optics:

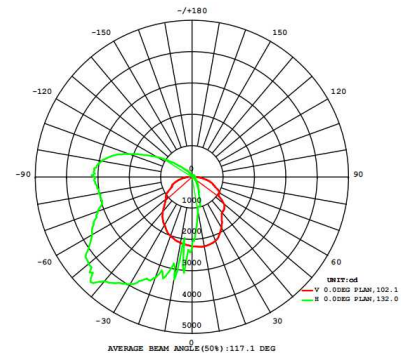

Package:

Model	RMS-WP-60W	RMS-WP-80W	RMS-WP-100W	RMS-WP-120W
Package Size	370x280x205mm	370x280x205mm	370x280x205mm	370x280x205mm
Weight	1.08kg	2.17kg	2.17kg	2.46kg

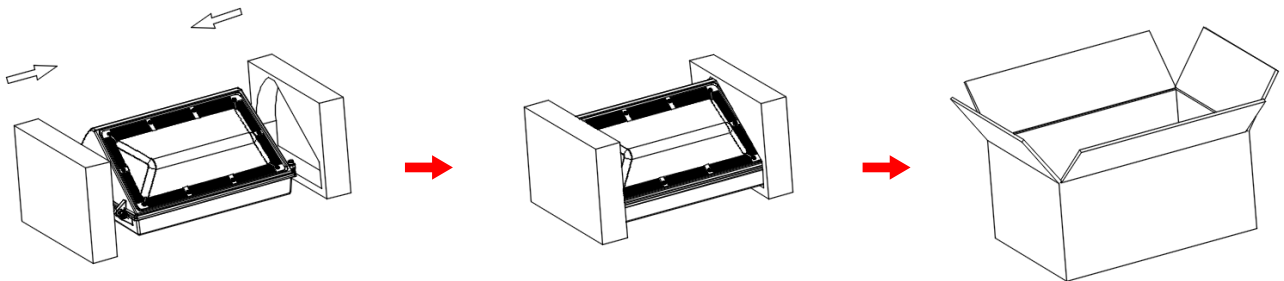

Application:

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters

