
ADJUSTABLE STEEL GANTRY CRANE - AHS-2-15-9

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

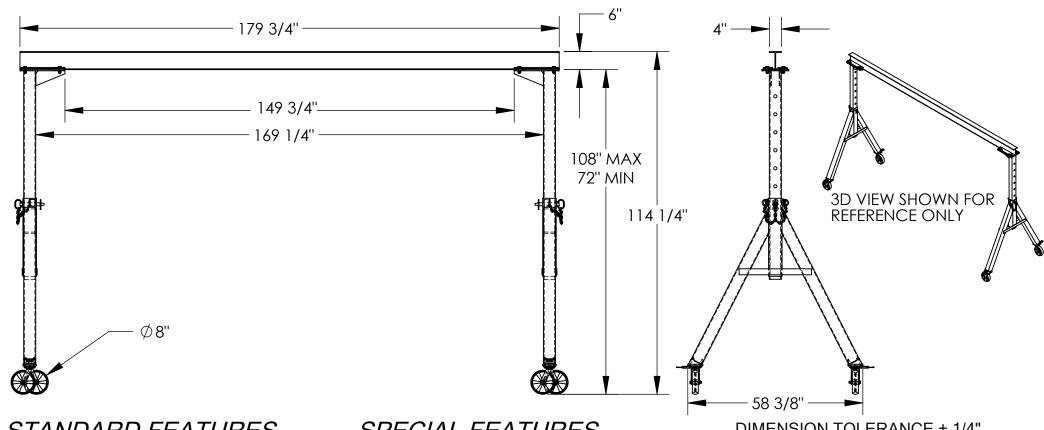

STANDARD FEATURES

MODEL NUMBER IS AHS-2-15-9 CAPACITY IS 2,000 LBS.

BASE WIDTH IS 58 3/8"

MAX OVERALL HEIGHT IS 114 1/4"

I-BEAM HEIGHT IS 6"

I-BEAM FLANGE WIDTH IS 4"

OVERALL I-BEAM LENGTH IS 179 3/4"

USABLE I-BEAM LENGTH IS 149 3/4"

ADJUSTABLE UNDER I-BEAM HEIGHT

108" MAX

72" MIN

HEIGHT IS ADJUSTABLE IN 6" INCREMENTS CASTERS: (4) Ø8" X 2" WIDE GLASS FILLED NYLON ŚWIVEL CASTERS WITH FOUR LOCKING POSITIONS

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed: Date:

Printed Name:

P

Ρ

R

0

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

FOR INTERNAL USE ONLY		DISTRIBUTOR'S NAME:			P.O.# X
PROJECT SIGN OFF		VESTIL MANUFACTURING			W.O.# ,,
SALES					X
ENG.		drawn by: ND		12/2009	SALES: X
FAB.		reference: X		SCALE: 1:32	
POWER		Quoted lead time: χ	QUOTE #		28-007-203