
ADJUSTABLE STEEL GANTRY CRANE - AHS-8-20-12

APPROX WEIGHT: 1343,28 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

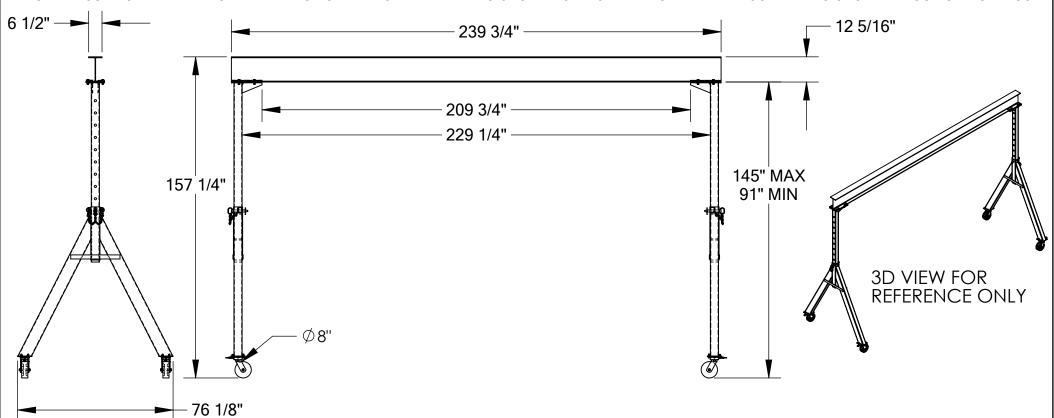

STANDARD FEATURES

MODEL NUMBER IS AHS-8-20-12 CAPACITY IS 8,000 LBS. BASE WIDTH IS 76 1/8"

MAX OVERALL HEIGHT IS 157 1/4"

I-BEAM HEIGHT IS 12 5/16"

I-BEAM FLANGE WIDTH IS 6 1/2"

OVERALL I-BEAM LENGTH IS 239 3/4"

USABLE I-BEAM LENGTH IS 209 3/4"

ADJUSTABLE UNDER I-BEAM HEIGHT

145" MAX

91" MIN

HEIGHT IS ADJUSTABLE IN 6" INCREMENTS CASTERS: (4) Ø8" X 3" WIDE PHENOLIC

SWIVEL CASTERS WITH FOUR LOCKING POSITIONS

SPECIAL FEATURES NONE

Α P Р R 0

DIMENSION TOLERANCE ± 1/4" I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed: Date:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

FOR INTERNAL USE ONLY		DISTRIBUTOR'S NAME:			P.O.# X
PROJECT SIGN OFF		VESTIL MANUFACTURING			W.O.#
SALES				_	X
ENG.		drawn by: ND		01/09	SALES: X
FAB.		reference: X		SCALE: 1:58	
POWER		QUOTED LEAD TIME: χ	QUOTE #		28-007-090