
APPROX WEIGHT: 40.50 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

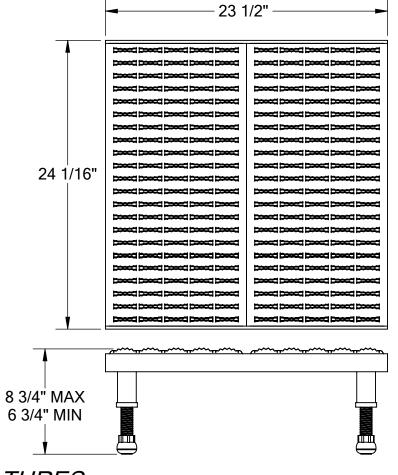

STANDARD FEATURES

- MODEL NUMBER: AHW-L-2424
- CAPACITY: 500LBS
- DECK WIDTH: 24 1/16"
- DECK LENGTH: 23 1/2"
- RAISED HEIGHT: 8 3/4"
- LOWERED HEIGHT: 6 3/4"
- ALL STEEL CONSTRUCTION

(ASTM A-36 MIN.) WITH WELDING TO MEET AWS.
- UNIT IS PAINTED YELLOW

FOR INTERNAL USE O PROJECT SIGN O			
SALES			
ENG.			
FAB.			
POWER			

REFERENCE: X

QUOTED LEAD TIME: $_{\mathbf{Y}}$

SPECIAL FEATURES **NONE**

DIMENSION TOLERANCE ± 1/4"

A P P R O V	REPRESENTE REQUIREMENT CONFIF COMPLIANCI AND LOC ALL SPECI	SIGNED, AGREE THAT THED SATISFIES DESIGN AND S. I ALSO ACKNOWLED AND INSTEMPTED BY ALL APPLICABLE AL REGULATIONS AND SAL UNITS ARE NON [] AS drawn [] A	ID DIMENSION DGE MY DUTY TO ALLATION FEDERAL, STATE STANDARDS. I-RETURNABLE		
A	Signed:		Date:		
L	LEAD ⁻	TIME WILL START UP GNED APPROVAL DR			
DISTRIBUTOR'S NAME: P.O.#					
VESTIL MANUFACTURING W.O.# X					
DRAWN BY: MTS		DATE:	SALES: V		

QUOTE #

FILE NAME:

14-007-217

SCALE: 1:8