
LOW PROFILE DC POWERED HYDRAULIC SCISSOR LIFT CART - APPROX WEIGHT: 505 lbs.

CART-LP-2000-4242-DC *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

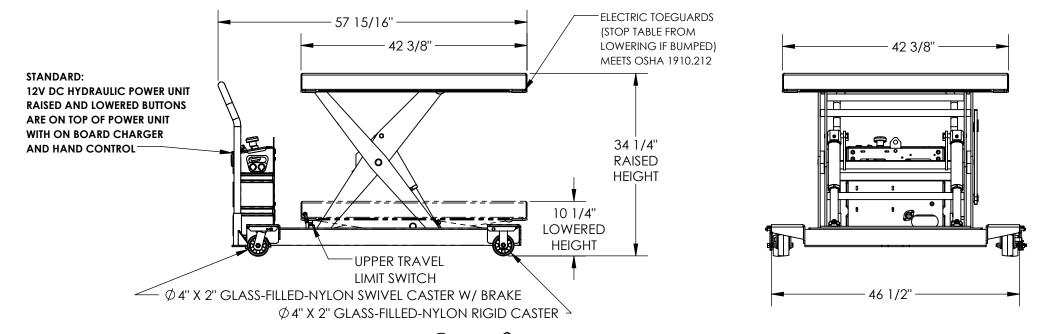

FOR INTERNAL USE ONLY

PROJECT SIGN OFF

SALES

ENG.

FAB.

POWER

STANDARD FEATURES

MODEL NUMBER IS CART-LP-2000-4242-DC

OVERALL WIDTH: 46 1/2" USABLE WIDTH: 42 3/8"

OVERALL LENGTH: 57 15/16" USABLE LENGTH: 42 3/8"

RAISED HEIGHT: 34 1/4" LOWERED HEIGHT: 10 1/4"

Ø 4" X 2" GLASS-FILLED-NYLON RIGID CASTER

Ø 4" X 2" GLASS-FILLED-NYLON SWIVEL CASTER W/ BRAKE

TABLE CAPACITY (EVENLY DISTRIBUTED)

MAX CAPACITY IS 2.000 LBS

CONTROL IS HANDHELD 2 BUTTON, NEMA 4 PENDANT

WITH MINIMUM 8' USABLE COIL CORD

SAFETY MAINTENANCE PROPS, DISPLACEMENT

STYLE CYLINDERS INSTALLED ROD DOWN


EMERGENCY SAFETY STOP HYDRAULIC FUSES

UPPER TRAVEL LIMIT SWITCH

ELECTRIC PINCH POINT GUARD DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE



DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

I l As marked [] As drawn

Date: Signed:

Printed Name:

R

Χ

VESTIL MANUFACTURING

W.O.# X

DATE: 06/14/2019 SALES: X

reference: X SCALE: 1:18 FILE NAME: QUOTED LEAD TIME: X QUOTE #

01-007-403