
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-3060-3-43

APPROX WEIGHT: 697.27 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

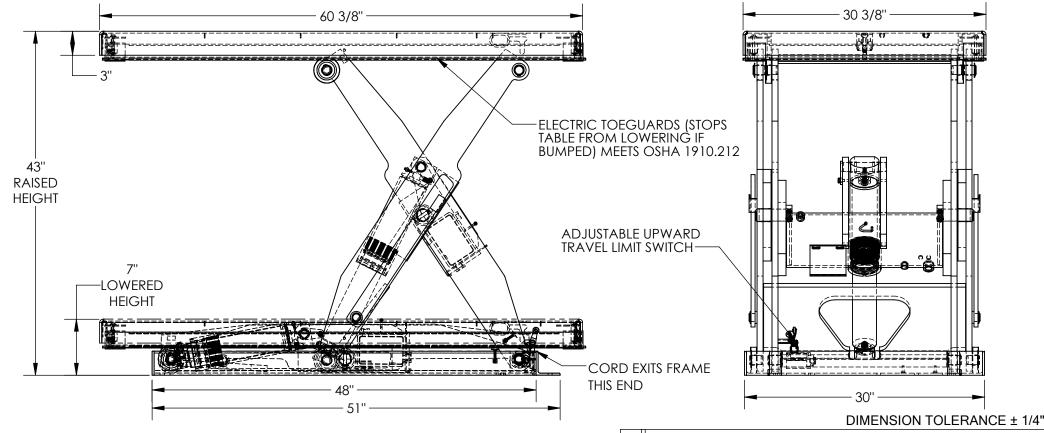

STANDARD FEATURES

MODEL NUMBER IS EHLT-3060-3-43 PLATFORM WIDTH IS 30 3/8" PLATFORM LENGTH IS 60 3/8" OVERALL LENGTH IS 60 3/8" PLATFORM RAISED HEIGHT IS 43" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 3,000 LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDER UNITS HAVE 2' TEST LEAD AND PIG TAIL DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS: P

POWER	AC		DC (12		AIR/OIL		R/OIL
MOTOR V	OLTA	GE	115	208	3	230	460
DEDICATED CIRCUIT REQUIRED 60Hz							
MOTOR P	HASE	SI	NGLE			THREE	
CONTR	OL.	H	IAND .		FOOT) T

DECK TOLERANCE ± 1/2"
TABLE HEIGHT TOLERANCE ± 1/2"
DECK FLATNESS ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGIONAL APPLICABLE SANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

Printed Name:__

Р

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:	P.O.# X	
VESTIL MANUFAC	W.O.# X	
DRAWN BY: DLS	DATE: 4/5/2017	SALES: X
REFERENCE: X	SCALE: 1:	12 FILE NAME:
QUOTED LEAD TIME: X	QUOTE #	24-007-051-001