

GROUND LIFT SCISSOR TABLE - EHLTG-4470-4-48

APPROX WEIGHT: 1940.56 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

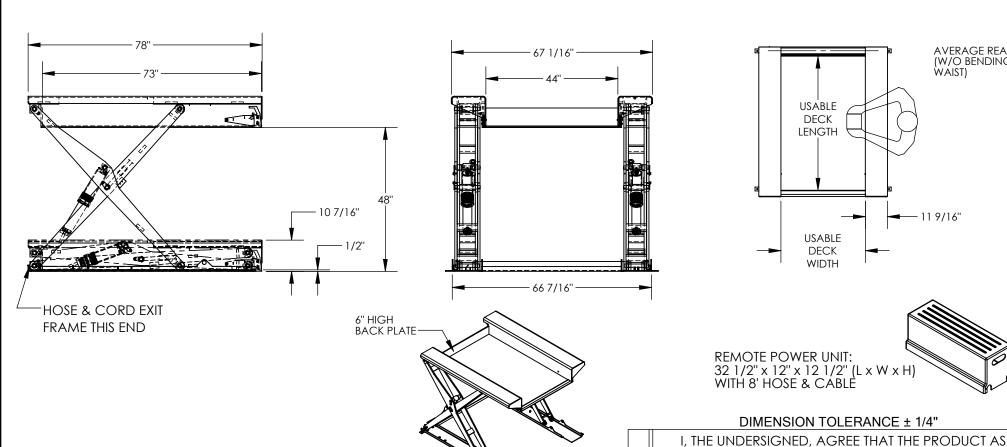



REMOTE POWER UNIT: 32 1/2" x 12" x 12 1/2" (L x W x H) WITH 8' HOSE & CÁBLÈ

DIMENSION TOLERANCE ± 1/4"

REPRESENTED SATISFIES DESIGN AND DIMENSION

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

AND LOCAL REGULATIONS AND STANDARDS

STANDARD FEATURES

MODEL NUMBER IS: EHLTG-4470-4-48 PLATFORM WIDTH (USABLE): 44" PLATFORM LENGTH (USABLE): 73" OVERALL WIDTH: 67 1/16" **OVERALL LENGTH: 78"**

PLATFORM RAISED HEIGHT: 48" PLATFORM LOWERED HEIGHT: 1/2"

CAPACITY: 4,000 LBS.

CONTROL IS FOOT SWITCH, 2 PEDAL, NEMA 1 WITH MINIMUM USABLE 8' STRAIGHT CORD **DURABLE LIQUID PANT BLUE FINISH EXTERNAL POWER UNIT**

PLEASE CIRCLE SPECIFICATIONS:

r LLASL	CINCLL	_9r L		/A	UNU.		
POWER	AC	-DC	(12V)	/ \	NOIL		
MOTOR V	OLTAGE	115	200	230	460		
DEDICATED CIRCUIT REQUIRED 60Hz							
MOTOR P	HASE S	SINGLE THREE		EE			
CONTR	OL	HAND		FOOT			

0

Α

Ρ

R

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As marked [] As drawn

Signed: Date: **Printed Name:**

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME:

VESTIL	MANUFACTURING

DRAWN BY: V.GONI	DATE: 08/	27/2013	SALES: X	
				_

reference: X SCALE: 1:32 FILE NAME:

QUOTE #

QUOTED LEAD TIME: X

04-007-055

W.O.# v

SPECIAL FEATURES NONE