
## ELECTRIC/HYDRAULIC CORNER TILTER - EMC-4848-2 \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

APPROX WEIGHT: 605.18 lbs.

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

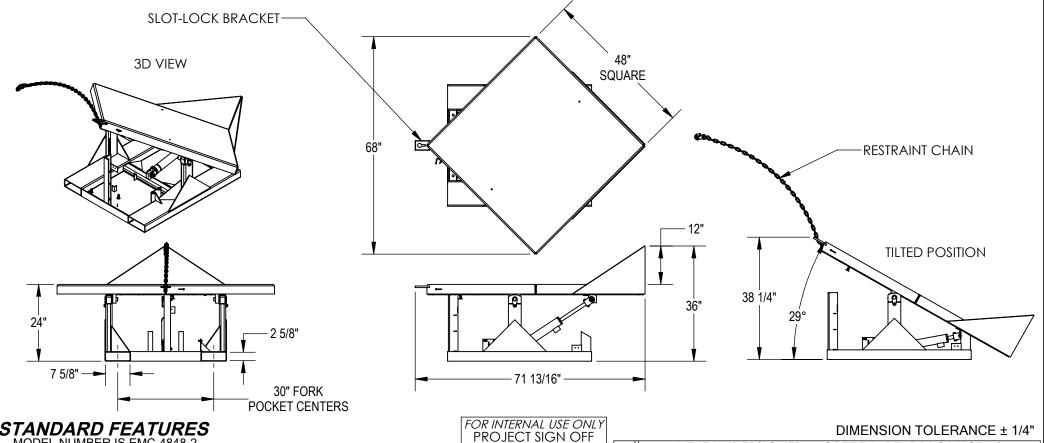

Α

Ρ

Ρ

R

0

Α

## STANDARD FEATURES MODEL NUMBER IS EMC-4848-2

**OVERALL WIDTH IS 68" USABLE WIDTH IS 48"** OVERALL LENGTH IS 71 13/16" **USABLE LENGTH IS 48' OVERALL HEIGHT IS 36"** TILTED HEIGHT IS 38 1/8" MAX CAPACITY IS 2000 LBS PLATFORM LEVEL HEIGHT IS 24" MAXIMUM TILT ANGLE IS 29° 2 HP POWER UNIT ALL STEEL CONSTRUCTION WELDING TO MEET AWS CHROME PLATED CYLINDERS 3000 PSI HYDRAULIC RATING WARNING: CHECK STATE AND LOCAL CODES!! SAFETY SLOT-LOCK CHAIN RESTRAINT BRACKET **DURABLE LIQUID PAINT** VESTIL ROYAL BLUE FINISH USABLE FORK POCKET - 2 5/8"H X 7 5/8"W

## SPECIAL FEATURES NONE

30" FORK POCKET CENTERS

**SALES** ENG. FAB. POWER PLEASE CIRCLE SPECIFICATIONS **POWER** AC AIR/OIL MOTOR VOLTAGE 115 208 460 DEDICATED CIRCUIT REQUIRED **MOTOR PHASE SINGLE THREE** CONTROL \* **FOOT** HAND ~ ALL BATTERY CHARGERS ARE 115V AC ~ BATTERY CHRG. **ON-BOARD REMOTE** 

YES

NO

CHRG. INDICATOR

## CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS

REPRESENTED SATISFIES DESIGN AND DIMENSION

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

[ ] As drawn [ ] As marked

Signed: Date:

**Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:	P.O.# >
VECTIL AAANILIEA CTUDINIC	W/ O #

VESTIL MIANUFACTURING Χ DRAWN BY: MTS SALES: X

Χ

02/20/2014 REFERENCE: X SCALE: 1:30 FILE NAME:

QUOTED LEAD TIME: X 38-007-034 QUOTE #

\* AVAILABLE AT ADDITIONAL COST