
ELECTRIC/HYDRAULIC CORNER TILTER - EMC-4848-4 *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

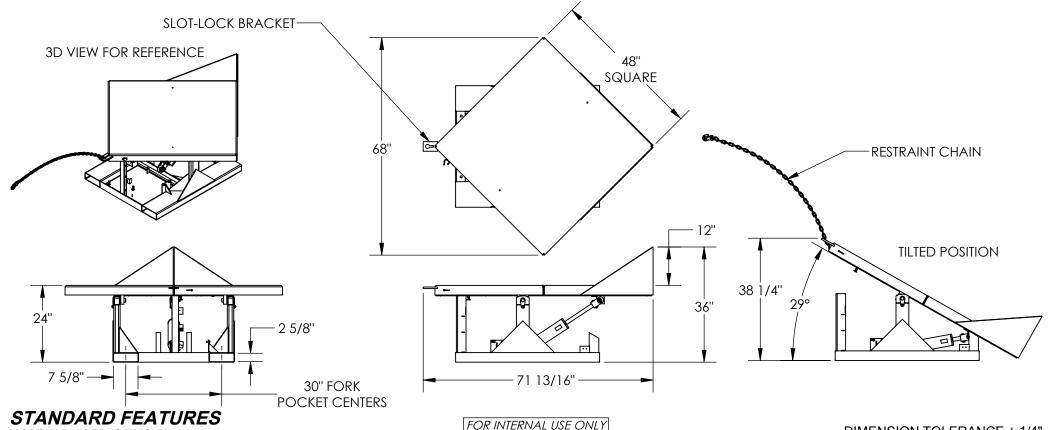

STANDARD FEATURES

MODEL NUMBER IS EMC-4848-4 OVERALL WIDTH IS 68" **USABLE WIDTH IS 48"** OVERALL LENGTH IS 71 13/16" **USABLE LENGTH IS 48" OVERALL HEIGHT IS 36"** TILTED HEIGHT IS 38 1/4" MAX CAPACITY IS 4000 LBS. PLATFORM LEVEL HEIGHT IS 24" MAXIMUM TILT ANGLE IS 29° 2 HP POWER UNIT ALL STEEL CONSTRUCTION WELDING TO MEET AWS CHROME PLATED CYLINDERS 3000 PSI HYDRAULIC RATING WARNING: CHECK STATE AND LOCAL CODES!! SAFETY SLOT-LOCK CHAIN RESTRAINT BRACKET **DURABLE LIQUID PAINT** VESTIL ROYAL BLUE FINISH USABLE FORK POCKET - 2 5/8"H X 7 5/8"W 30" FORK POCKET CENTERS

SPECIAL FEATURES

NONE

PROJECT SIGN OFF **SALES** ENG. FAB. POWER PLEASE CIRCLE SPECIFICATIONS: **POWFR** AC * DC AIR/OIL MOTOR VOLTAGE 115 208 230 460 DEDICATED CIRCUIT REQUIRED MOTOR PHASE **SINGLE THREE** CONTROL **HAND** * FOOT ~ ALL BATTERY CHARGERS ARE 115V AC ~ BATTERY CHRG. **REMOTE** ON-BOARD

YFS

* AVAILABLE AT ADDITIONAL COST

NO

CHRG. INDICATOR

٧

Α

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION Α REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION Ρ COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ AND LOCAL REGULATIONS AND STANDARDS. R 0

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME: P.O.#

VFSTII	MANUFACTURING	W.O.#

V ESTIL 747/ (14017/C	2101(1140	X
DRAWN BY: MTS	DATE: 02/20/14	SALES: X
REFERENCE: V	CCALE, 1,20	FILE NAME:

SCALE: 1:30

QUOTED LEAD TIME: X QUOTE # 38-007-003 Χ