
MULTI-PURPOSE TOTE DUMPER-JMD-1000-48 APPROX WEIGHT: 1113.82 lbs. Does not include weight of power or packaging!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE

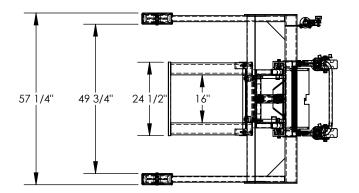


PLEASE CIRCLE SPECIFICATIONS:

_								
	POWER	AC	-	DC (12		2V)	* AIR/OIL	
	MOTOR V	OLTA	GE	115 2		3	230	460
	DEDICATED CIRCUIT REQUIRED)
	motor phase		SINGLE			THREE		
	CONTROL		HAND			* FOOT		
	~ ALL BATTERY CHARGERS ARE 115V AC ~							
	BATTERY CH	HRG.	RE	TOM	E	0	N-BO	ARD
*	CHRG. INDIC	CATOR		YES			NC)

^{*} AVAILABLE AT ADDITIONAL COST

FLOOR

LOCK

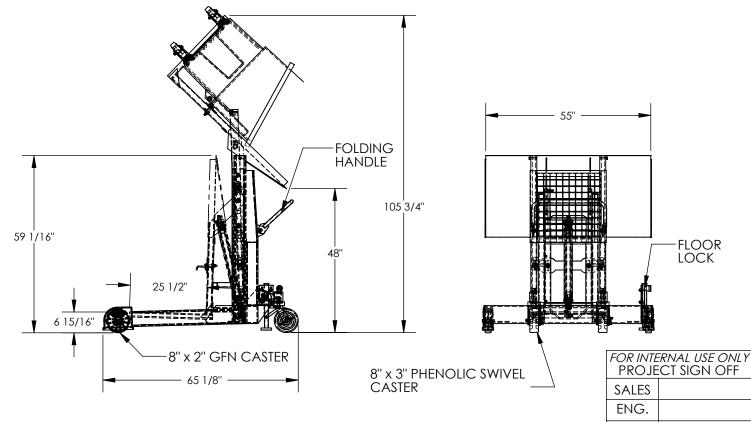

P

P

R

0

٧

Α

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

STANDARD FEATURES

MODEL NUMBER IS JMD-1000-48 MAXIMUM CAPACITY IS 600 LBS *CAPACITY MAY BE DOWN RATED TO CAPACITY OF TOTE BEING USED OVERALL WIDTH IS 57 1/4' USABLE CHUTE WIDTH IS 55' STRADDLE WIDTH(I.D.) IS 49 3/4" OVERALL LENGTH IS 65 1/8" **DUMP HEIGHT IS 48"** OVERALL LOWERED HEIGHT IS 59 1/16" OVERALL ROTATED HEIGHT IS 105 3/4" MAXIMUM ROTATION ANGLE IS 135° FLOOR LOCK

INCLUDES ONE MPT-2 POLYETHYLENE TOTE (600 LBS CAP) DURABLE LIQUID PAINT BLUE FINISH

*ADDITIONAL TOTES

MPT-1 TOTE HAS A 200 LBS CAP. MPT-2 TOTE HAS A 600 LBS CAP.

SPECIAL FEATURES

NONE

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

DIMENSION TOLERANCE ± 1/4"

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn As marked

FAB.

POWER

Signed:	Date:
Printed Name:	

LEAD TIME WILL START UP	ON RECEIF	OF SIGNED .	APPROVAL DRAWIN
DISTRIBUTOR'S NAME:			P.O.# X
VESTIL MANUFAC	W.O.# X		
DRAWN BY: WHR	DATE: 12/	Z1/ZU11	SALES: X
eference: X		SCALE: 1:32	
QUOTED LEAD TIME: X	QUOTE #		34-007-016