
LIFT MASTER BOOM, TELESCOPING ECONOMY BOOM - LM-EBT-8-30

APPROX WEIGHT: 624.70 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

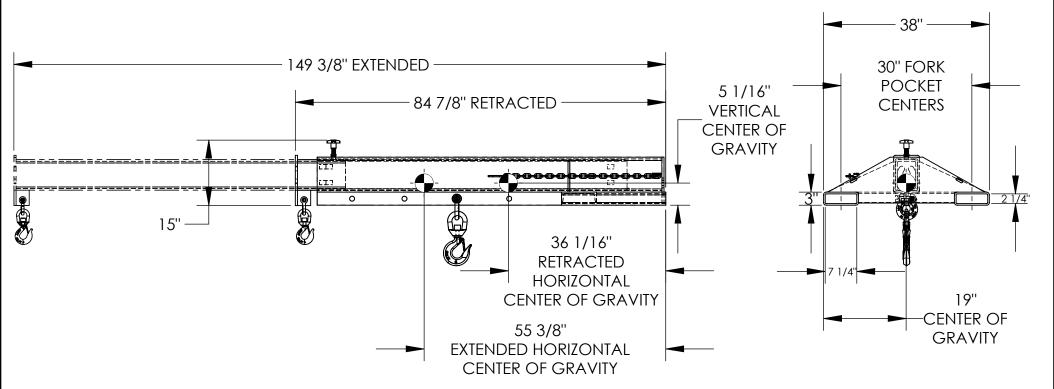

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	8000	6650	6000	5300	4650	4000	3500	3000	2600	2200

STANDARD FEATURES

MODEL NUMBER IS LM-EBT-8-30 CAPACITY IS 8,000 LBS. WEIGHT / LOST LOAD IS 625 LBS OVERALL WIDTH IS 38" NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES.
DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

FORK POCKET CENTERS IS 30"
OVERALL LENGTH (RETRACTED) IS 84 7/8"
OVERALL LENGTH (EXTENDED) IS 149 3/8"
OVERALL HEIGHT IS 15"

SPECIAL FEATURES
NONE

REFERENCE:

QUOTED LEAD TIME: X

USABLE FORK POCKET IS 2 1/4" X 7 1/4"

36" MINIMUM HOOK POINT

144" MAXIMUM HOOK POINT

EFFECTIVE THICKNESS IS LESS THAN 1"

FRAME TOUGH BAKED IN POWDER COATED BLUE FINISH BOOM TOUGH BAKED IN POWDER COATED YELLOW FINISH

DIMENSION TOLERANCE ± 1/4"

	DIVIDION	
A P P R O	I, THE UNDERSIGNED, AGREE T REPRESENTED SATISFIES DESIG REQUIREMENTS. I ALSO ACKNO CONFIRM PRODUCT ANI COMPLIANCE WITH ALL APPLIC AND LOCAL REGULATIONS UNITS REQUIRING APPRO MODIFIED ARE NON	GN AND DIMENSION DWLEDGE MY DUTY TO D INSTALLATION CABLE FEDERAL, STATE S AND STANDARDS. DVAL DRAWINGS OR N-RETURNABLE
V	[] As drawn	[] As marked
V A L	[] As drawn Signed:	[] As marked Date:
V A L	Signed:Printed Name:	Date:
V A L	Signed:	Date:
L	Signed:Printed Name:	Date:
DISTRI	Signed: Printed Name: LEAD TIME WILL START UPON RECEIPT	Date:

QUOTE #

Χ

SCALE: 1:18 FILE NAME:

08-007-291