
LIFT MASTER BOOM, ORBIT NON-TELESCOPING BOOM-LM-OBNT-4-36 APPROX WEIGHT: 391.32 lbs. Does not include weight of power

36" FORK

POCKET -**CENTERS**

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

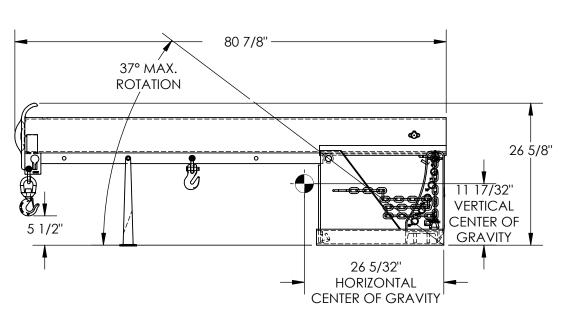

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48''	60''	72"	78''
CAPACITY	4000	3750	3500	3250	3000

STANDARD FEATURES

MODEL NUMBER IS LM-OBNT-4-36 CAPACITY IS 4,000 LBS MAXIMUM TILT ANGLE IS 37° OVERALL HEIGHT - 26 5/8" HEIGHT (MAX TILTED) - 57 3/16" OVERALL LENGTH - 80 7/8" OVERALL WIDTH IS 44" 36" MINIMUM HOOK POINT 78" MAXIMUM HOOK POINT HOOK HEIGHT - 5 1/2" HOOK HEIGHT (MAX TILTED) - 38 1/4" USABLE FORK POCKET - 2 1/2"x7 1/2" 36" FORK POCKET CENTERS TOUGH BAKED IN POWDER COATED BLUE FINISH

APPROX. WEIGHT / LOST LOAD = 391.32 MINIMIM EFFECTIVE THICKNESS = LESS THAN 1" **NEVER EXCEED LOAD CENTER** RATING PER FORKTRUCK MANUFACTURERS GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

SPECIAL FEATURES NONE

FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB. POWER

Α

Ρ

Ρ

R

0

V

Α

DIMENSION TOLERANCE ± 1/4" I. THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION

2 1/2'

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

7 1/2"

21 3/4" **CENTER OF**

GRAVITY

Printed Name:____

LEAD TIME WILL START UPO	ON RECEIP	PT OF SIGNED .	<u>APPROVAL DRAWING</u>
DISTRIBUTOR'S NAME:			P.O.# X
VESTIL MANUFAC	W.O.# X		
DRAWN BY: B.NOTHNAGEL	DATE: 7/2	/2015	SALES: X
reference: X		SCALE: 1:18	FILE NAME:
QUOTED LEAD TIME: χ	QUOTE#		08-007-308