
LIFT MASTER BOOM, ORBIT TELESCOPING BOOM-LM-OBT-6-30

APPROX WEIGHT: 515.21 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

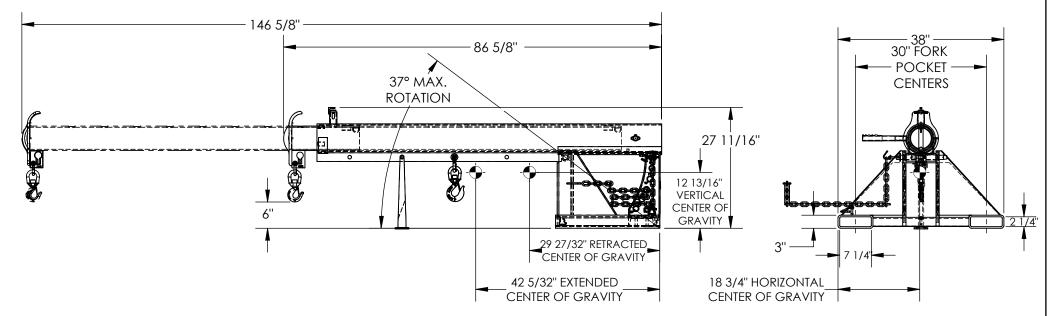

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60''	72"	84"	96"	108"	120"	132"	144"
CAPACITY	6000	5000	4500	4000	3500	3000	2600	2300	2000	1800

STANDARD FEATURES

MODEL NUMBER IS LM-OBT-6-30 CAPACITY IS 6,000 LBS MAXIMUM TILT ANGLE IS 37° OVERALL HEIGHT - 27 11/16" HEIGHT (MAX TILTED) - 99 1/2" LENGTH RETRACTED - 86 5/8" LENGTH EXTENDED - 146 5/8" **OVERALL WIDTH IS 38"** 36" MINIMUM HOOK POINT 144" MAXIMUM HOOK POINT **HOOK HEIGHT - 6"** HOOK HEIGHT (MAX TILTED) - 78 5/16" USABLE FORK POCKET - 2 1/4"x7 1/4" 30" FORK POCKET CENTERS TOUGH BAKED IN POWDER COATED BLUE BASE FRAME W/ YELLOW EXTENSION

LOAD CENTER RATING

SPECIAL FEATURES

NONE

APPROX. WEIGHT / LOST LOAD = 515.21 MINIMIM EFFECTIVE THICKNESS = LESS THAN 1" NEVER EXCEED LOAD CENTER RATING PER FORKTRUCK MANUFACTURERS GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed:

Printed Name:

Α

P

Ρ

R

0

V

		LEAD TIME WILL START UPO	<u>ON RECEIP</u>	PT OF SIGNED A	<u>APPROVAL DRAWING</u>
	FRNAL USE ONLY CT SIGN OFF		P.O.# X		
SALES		VESTIL MANUFAC		1G	W.O.# X
ENG.		drawn by: B.NOTHNAGEL		/2015	SALES: X
FAB.		reference: X		SCALE: 1:22	
POWER		QUOTED LEAD TIME: χ	QUOTE #		08-007-305