
PALLET MASTER/SERVER - PMPS-50-DC

APPROX WEIGHT: 1008,98 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

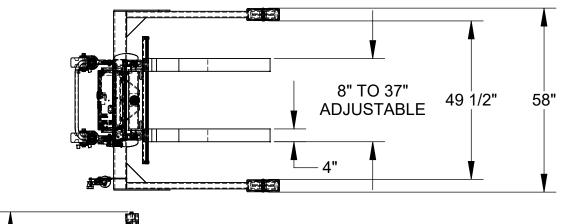

91" 77 **SERVICE** 12V DC POWER UNIT **RANGE** 3" TO 50" 66"

STANDARD FEATURES

MODEL NUMBER IS PMPS-50-DC OVERALL WIDTH IS 58" STRADDLE INNER DIMENSION IS 49 1/2" **OVERALL LENGTH IS 66" OVERALL RAISED HEIGHT IS 91" OVERALL LOWERED HEIGHT IS 77"** MAXIMUM FORK HEIGHT BEFORE CARRIAGE EXCEEDS HEIGHT OF MAST IS 36 1/2" FORK CAPACITY (EVENLY DISTRIBUTED IS 4000 LBS FORKS ARE 1 1/2" THICK x 4" WIDE x 36" LONG MAXIMUM FORK SPREAD IS 37" O.D. FLOOR LOCK 12V DC POWER UNIT CONTROL PENDANT W/8' CORD NOT SHOWN ALL STEEL CONSTRUCTION (ASTM A-36 MINIMUM) DURABLE LIQUID PAINT BLUÈ FINISH

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4"

| FOR INTERNAL USE ONL PROJECT SIGN OFF | | | | | |
|--|--|--|--|--|--|
| SALES | | | | | |
| ENG. | | | | | |
| FAB. | | | | | |
| POWER | | | | | |

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn

Signed: Date:

Printed Name:

A.FORD

TRIBUTOR'S NAME:

Ρ

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

| \/ CTII | A A A NILLE A CTLIDINIC |
|------------------|-------------------------|
| A E211F | MANUFACTURING |

W.O.# SALES: X 8/3/07

15-007-020

[] As marked

FERENCE: X SCALE: 1:30 FILE NAME: UOTED LEAD TIME: Y QUOTE #

Χ

PLEASE CIRCLE SPECIFICATIONS:

|] } | *AIR/OIL | | DC (12V | | | AC | POWER | |
|-------|--------------------------------------|-------------|---------|-----|-----|-------|-------------|--|
| / | 460 | 230 | 208 | 115 | GE | OLTA | MOTOR V | |
|] - | DEDICATED CIRCUIT REQUIRED | | | | | | | |
| DI: | EE | IGLE THREE | | | SI | HASE | MOTOR P | |
| |)T | IAND * FOOT | | H | ROL | CONTR | | |
| DF | ~ ALL BATTERY CHARGERS ARE 115V AC ~ | | | | | | | |
| | ARD | N-BO | E O | HOT | RE | HRG. | BATTERY CI | |
| RE |) | NC | | YES | | CATOR | CHRG. INDIC | |
| , | * AVAILABLE AT ADDITIONAL COST | | | | | | | |