

MECHANICAL DOCKLEVELER - RR-68-20

APPROX WEIGHT: 2141 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

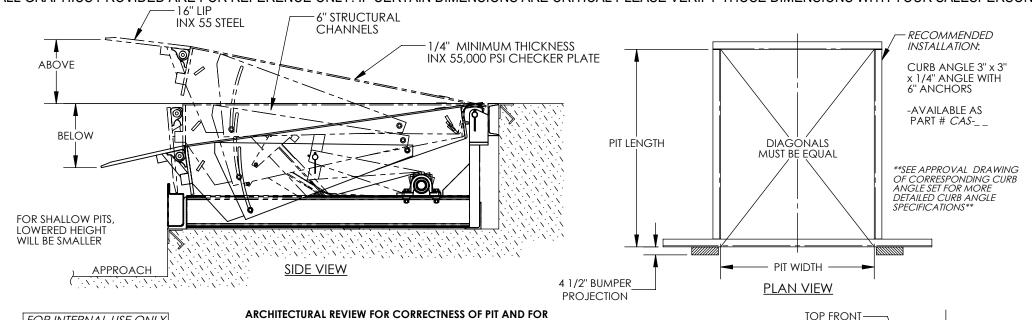



COMPLIANCE TO STATE AND LOCAL CODES IS RECOMMENDED.

PLEASE CIRCLE SPECIFICATIONS:

NEW	(PIT) CONSTRUCTION
EXISTING	(PIT) CONSTRUCTION

STANDARD FEATURES

DOCKEVELER MODEL NUMBER: RR-68-20

PIT WIDTH IS: 74 INCHES PIT LENGTH IS: 86 INCHES

PIT DEPTH IS 24 INCHES AT FRONT, 23 3/4 INCHES AT BACK

DOCK HEIGHT IS 48 INCHES (48 INCHES STANDARD)

DOCKLEVELER CAPACITY (GROSS ROLLING LOAD) IS 20,000 LBS.

VERTICAL SERVICE RANGE IS 12 INCHES ABOVE AND 12 INCHES BELOW DOCK

INCLUDES (2) 1014-4.5 LAMINATED DOCK BUMPERS

DURABLE L'IQUID PAINT BROWN FINISH WITH YELLOW DECK SIDES & TOE GUARDS

SINGLE AXLE CAPACITY NOT TO EXCEED 70% OF LOAD

ALL STRUCTURAL STEEL CONSTRUCTION WELDING MEETS AWS. DESIGN, ENGINEERING, AND FABRICATION COMPLIES WITH OSHA & ANSI MH30.1 -INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA!

SPECIAL FEATURES

NONE

			TOP FRON	IT—	V
DOCK HEIGHT		FRON	NT VIEW		PIT DEPTH
SEE DRA	WING NUM	MBERS RR-	1 THRU RR-	4 FOR MOI	RE INSTALLA

•	SEL DRAWING IN	DMBLK3 KK-1 IIIKO KK-4 I OK	MORE INSTALLATION IN C
A P P R O V	REPRE REQUIRE COMPLI AND	NDERSIGNED, AGREE THA SENTED SATISFIES DESIGN MENTS. I ALSO ACKNOW ONFIRM PRODUCT AND IT ANCE WITH ALL APPLICAL LOCAL REGULATIONS AN DIFIED UNITS ARE NO	AND DIMENSION /LEDGE MY DUTY TO NSTALLATION BLE FEDERAL, STATE ND STANDARDS. ON-RETURNABLE
Α	Signed:		Date:
L	Printed Nan	ne: L START UPON RECEIPT OF S.	SIGNED APPROVAL DRAWING
DISTR	RIBUTOR'S NAME:		P.O.# X
V	ESTIL MAI	NUFACTURING	W.O.# v

QUOTE #

Χ

02/27/12

SCALE: NTS

DRAWN BY:

reference: X

QUOTED LEAD TIME: χ

TJM

SALES: X

FILE NAME:

07-007-012