
ADJUSTABLE SPREADER BEAM- SBM-BFB-100-10

PROX WEIGHT: 423 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

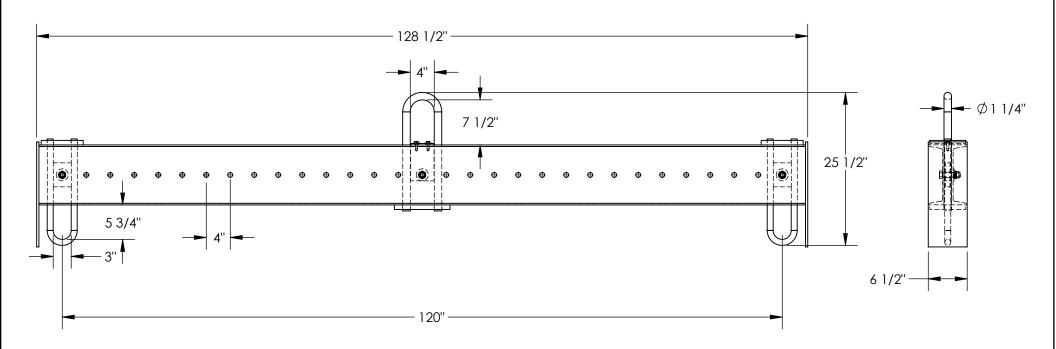

SALES

ENG.

FAB.

POWER

STANDARD FEATURES

MODEL NUMBER IS SBM-BFB-100-10
OVERALL WIDTH IS 6 1/2"
OVERALL LENGTH IS 128 1/2"
OVERALL HEIGHT IS 25 1/2"
MAX CAPACITY IS 10,000 LBS.
USABLE UPPER BAIL IS 4" W x 7 1/2" H
USABLE LOWER BAIL IS 3" W x 5 3/4" H
BAILS ADJUSTABLE IN 4" INCREMENTS
MAX SPREAD 120"
MIN SPREAD 24"
TOUGH BAKED IN POWDER COATED BLUE FINISH

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4'

SALES: X

08-007-440

SCALE: 1:16 FILE NAME:

7/29/2019

QUOTE #

Χ

			DIMENSI	ON TOLERANCE ± 1/4
	A P P R O V	REQU CON	IE UNDERSIGNED, AGREE THAT PRESENTED SATISFIES DESIGN A UIREMENTS. I ALSO ACKNOWL CONFIRM PRODUCT AND IN MPLIANCE WITH ALL APPLICAB AND LOCAL REGULATIONS AN MODIFIED UNITS ARE NO	AND DIMENSION EDGE MY DUTY TO ISTALLATION ILE FEDERAL, STATE D STANDARDS.
	A	Signed:		Date:
	┞┖╽	Printed Name:		
	LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING			
FOR INTERNAL USE ONLY	DISTR	IBUTOR'S NAM	ΛE:	P.O.# X
PROJECT SIGN OFF	V	FSTIL N	MANUFACTURING	W.O.# ,,

JWW

reference: X

QUOTED LEAD TIME: X