
AC POWERED HYDRAULIC SCISSOR LIFT TABLE - SCTAB-1000-2040-AC APPROX WEIGHT: 278.62 lbs. *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON DECK TOLERANCE ±1/2" TABLE HEIGHT TOLERANCES ±1/2" 51 9/16" DECK FLATNESS ±1/4" **ELECTRIC TOEGUARDS** 40 3/8" **(STOP TABLE FROM** LOWERING IF BUMPED) MEETS OSHA 1910.212

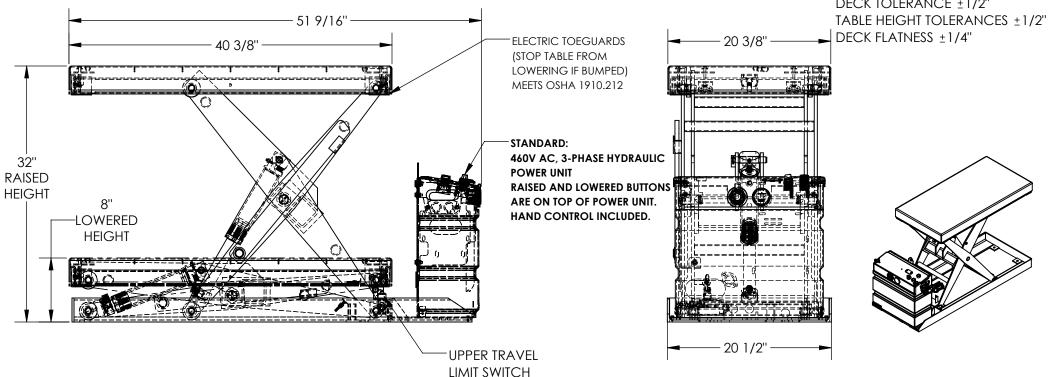

STANDARD FEATURES

MODEL NUMBER IS SCTAB-1000-2040-AC DECK WIDTH IS 20 3/8" DECK LENGTH IS 40 3/8" **RAISED HEIGHT IS 32"** LOWERED HEIGHT IS 8" TABLE CAPACITY (EVENLY DISTRIBUTED) MAX CAPACITY IS 1.000 LBS.

CONTROL IS HANDHELD 2 BUTTON. NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD

SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN

EMERGENCY SAFETY STOP HYDRAULIC FUSES

UPPER TRAVEL LIMIT SWITCH ELECTRIC PINCH POINT GUARD

DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS:

POWER MOTOR VOLTAGE 115 208 DEDICATED CIRCUIT REQUIRED 60Hz Ρ MOTOR PHASE **SINGLE THREE** R 0 CONTROL **HAND** FOOT

> FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB.

> > **POWFR**

Α

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed: Date:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING W.O.#

DATE: 05/30/2019 SALES: X reference: X SCALE: 1:12 FILE NAME:

QUOTED LEAD TIME: X QUOTF # 01-007-395 Χ