
APPROX WEIGHT: 14.58 lbs.


SALES: X

44-007-590-001

SCALE: 1:12 FILE NAME:

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

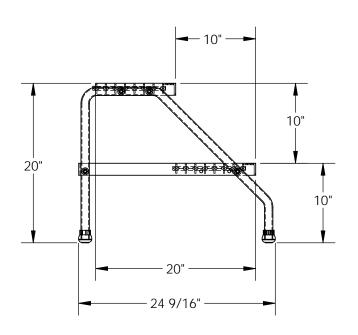




**SALES** 

ENG.

FAB.

**POWER** 

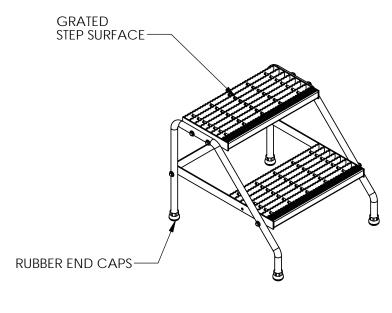

DATE: 2/<u>8/2016</u>

QUOTE #

Χ

## STANDARD FEATURES

MODEL NUMBER IS SSA-2-KD-Y **DOUBLE STEP UNIT** OVERALL WIDTH IS 22 13/16" USEABLE WIDTH IS 20 1/8" **OVERALL LENGTH IS 24 9/16" USEABLE LENGTH IS 20" OVERALL HEIGHT IS 20"** MAX CAPACITY IS 500 LBS YELLOW POWDER COAT FINISH

## SPECIAL FEATURES

NONE

	DIMENSION TOLERANCE ± 1/4"		
	A P P R O V	I, THE UNDERSIGNED, AGREE THAT THE P REPRESENTED SATISFIES DESIGN AND D REQUIREMENTS. I ALSO ACKNOWLEDGE CONFIRM PRODUCT AND INSTALL, COMPLIANCE WITH ALL APPLICABLE FED AND LOCAL REGULATIONS AND STAI ALL SPECIAL UNITS ARE NON-R [ ] As drawn [ ] As I	IMENSION MY DUTY TO ATION DERAL, STATE NDARDS. ETURNABLE
	A	Signed:	_Date:
	L	LEAD TIME WILL START UPON OF SIGNED APPROVAL DRAW	-
FOR INTERNAL USE ONLY DISTRIBUTOR'S NAMI		BUTOR'S NAME:	P.O.# X
PROJECT SIGN OFF	VESTIL MANUFACTURING		W.O.# X
CVIEC			1 ''

DRAWN BY: BCN

QUOTED LEAD TIME: X

reference: X