NUMBER FIX

LINE 02 | ALUMINUM

House Number and Text

Line 02 | Aluminum

NUMBER FIX

Font: *Rail*

Width: mm 250

Line Up: From one to four numbers
Line Down: From one to four letters

Line Up: From five to six numbers
Line Down: From eight to ten letters

Line Up: From seven to eight numbers
Line Down: From eleven to twelve letters

Line Up: From nine to ten numbers
Line Down: From thirteen to fourteen letters

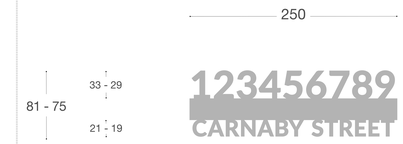

Readability

From one to six numbers
average readability
of the number: m 30 - m 27

From one to eight letters
average readability
of the letter: m 10 - m 9

From seven to ten numbers
Average readability
of the number: m 17 - m 12

From seven to fourteen letters
Average readability
of the letter: m 10 - m 8

** Readability and sizes depends on the type of content: ex: only letters, only numbers, letters + numbers*

View in 3D



Width: mm 300

Line Up: From one to four numbers
Line Down: From one to four letters

Line Up: From five to six numbers
Line Down: From eight to ten letters

Line Up: From seven to eight numbers
Line Down: From eleven to twelve letters

Line Up: From nine to ten numbers
Line Down: From thirteen to eighteen letters

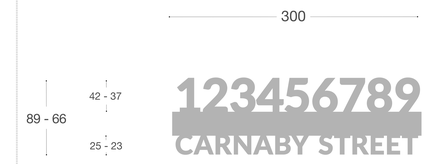

From one to six numbers
average readability
of the number: m 36 - m 24

From one to eight letters
average readability
of the letter: m 12 - m 10

From seven to ten numbers
Average readability
of the number: m 20 - m 15

From seven to fourteen letters
Average readability
of the letter: m 12 - m 10

** Readability and sizes depends on the type of content: ex: only letters, only numbers, letters + numbers*

ABCDEFGHIJKLM
NOPQRSTUVWXYZ
abcdefghijklm
nopqrstuvwxyz
1234567890

From "manual" the ratio character size - maximum reading distance is 1cm - 4 meters. In other words, a 1 cm high character can be read up to a maximum distance of 4 meters. Of course the values change proportionally. For example, a character 10 cm high can be read up to a distance of 40 meters. They seem very low values, but try: if your eyesight is normal these proportions are more than acceptable.

Width: mm 400

Line Up: From one to four numbers
Line Down: From one to four letters

Line Up: From five to six numbers
Line Down: From eight to eleven letters

Line Up: From seven to eight numbers
Line Down: From twelve to fourteen letters

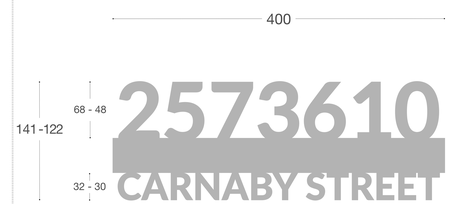

Line Up: From nine to ten numbers
Line Down: From fifteen to twentyone letters

From one to six numbers
average readability
of the number: m 49 - m 34

From one to eight letters
average readability
of the letter: m 15 - m 14

From seven to ten numbers
Average readability
of the number: m 27 - m 19

From seven to fourteen letters
Average readability
of the letter: m 13 - m 8

** Readability and sizes depends on the type of content: ex: only letters, only numbers, letters + numbers*

⚠ Structural exceptions

The punctuation, separation, and accentuation marks will not be taken into consideration during the production phase due to technical reasons related to the manufacturing process.

“ ” ’ - _ . : , ; ` ´ ✗

Line 02 | Aluminum

NUMBER FIX

Example

Example
Width: mm 250

Line Up: One number
Line Down: Fourteen letters

Line Up: Seven numbers
Line Down: Four letters

Line Up: From nine to ten number
Line Down: From one to four letter

Example
Width: mm 300

Line Up: One number
Line Down: Twelve letters

Line Up: Nine numbers
Line Down: Fourteen letters

Line Up: Five numbers
Line Down: Four letters

Example
Width: mm 400

Line Up: One number
Line Down: Twentyone letters

Line Up: Five numbers
Line Down: Four letters

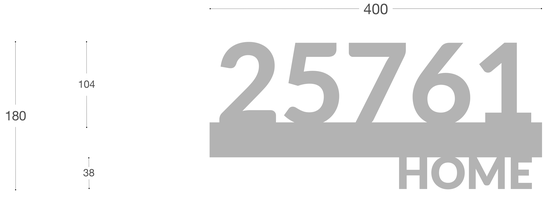

Line Up: Seven numbers
Line Down: Four letters

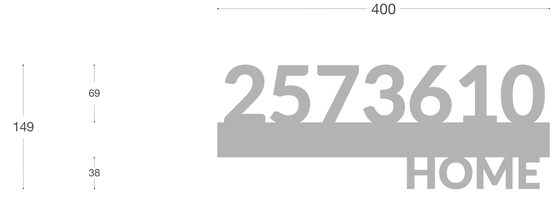

ABCDEFGHIJKLM
NOPQRSTUVWXYZ
abcdefghijklm
nopqrstuvwxyz
1234567890

From "manual" the ratio character size - maximum reading distance is 1cm - 4 meters. In other words, a 1 cm high character can be read up to a maximum distance of 4 meters. Of course the values change proportionally. For example, a character 10 cm high can be read up to a distance of 40 meters. They seem very low values, but try: if your eyesight is normal these proportions are more than acceptable.

⚠ **Structural exceptions**

The punctuation, separation, and accentuation marks will not be taken into consideration during the production phase due to technical reasons related to the manufacturing process.

“ ” ’ - _ . : , ; ` ´ ✗