




Puretec[®]
PERFECTING WATER

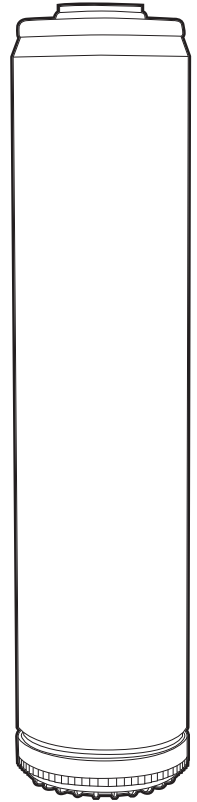

User Guide

TR20MP2

Tannin Reduction Cartridge

Introduction

Thank you for purchasing a Puretec Tannin Reduction Cartridge. Your cartridge is a proven performer manufactured from only quality materials and components.

The TR20MP2 is a brine regenerable drinking water cartridge that removes tannin through the use of tannin selective ion exchange resin.

Please follow the initial installation guidelines carefully. If you require any assistance, please contact our Customer Service Helpline **1300 140 140** (Australia) **0800 130 140** (New Zealand).

Caution: Do not use with water that is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.

Specifications

Model:	TR20MP2
Min/Max Operating Pressure:	100 - 500 kPa
Min/Max Temperature:	0°C - 43°C (protect from freezing)
Min/ Max Flow:	0 - 50 Lpm
Micron Rating:	20 micron

Regeneration Procedure

The TR Series cartridge will need to be regenerated prior to use, and whenever the colour in the water starts to return. It is important to note that the level of tannins/organics and the volume of water consumed are two factors which will impact the regeneration frequency. Puretec always recommend taking preventative measures including trimming back overhanging foliage, installing gutter mesh and devices to divert the first flush of rainwater away from the storage tank(s).

Please follow the procedure below to regenerate the cartridge:

- Turn off the water supply and release pressure by opening a downstream tap.
- Unscrew the housing bowl and remove the filter cartridge (if already installed) and allow the cartridge to drain completely.
- Empty the filter housing bowl and add 400 grams of rock salt to the bowl.
- Fill to 1/4 with warm water and stir to dissolve the rock salt.
- Add the filter cartridge to the filter housing bowl.
- Fill with cold water to the top of the housing bowl and allow to soak for 30 - 60 minutes.
- Empty the bowl and remove the cartridge letting it drain for 1 - 2 minutes before placing it back into the housing bowl and screw into the housing head.
- Flush the salty water out of the cartridge for 1-2 minutes, by turning the water supply on and opening the tap closest to the filter system.
- The cartridge is ready for use.

The TR Series cartridge is specifically for tannin/organics reduction only, it is not designed for sediment or taste/odour reduction, so is best used in conjunction with a two or three stage filtration system such as the HYBRID-G13. It is recommended to have sediment pre-filtration to avoid premature blocking of the TR Series cartridge, and carbon post-filtration to reduce taste & odour.

Replace the cartridge annually, or sooner if significantly shortened capacity is observed.



AUSTRALIA

P 1300 140 140

E sales@puretec.com.au

W puretec.com.au

NEW ZEALAND

P 0800 130 140

E sales@puretec.co.nz

W puretec.co.nz