


SUPPORT UNIT : EK シリーズ




ボールねじサポートユニット


EK4 ~ EK5

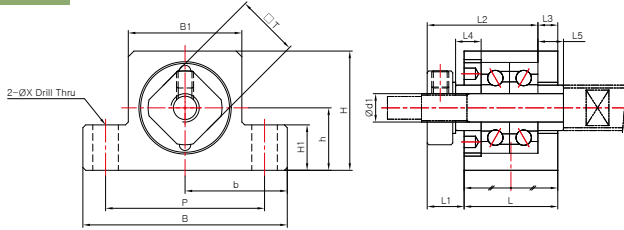


EK6 ~ EK8

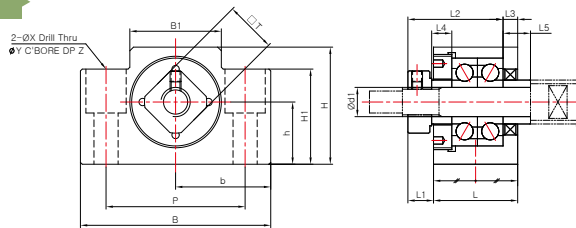

EK10 ~ EK25

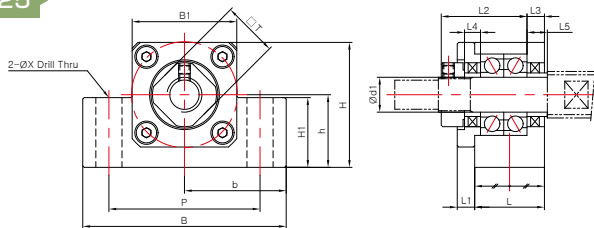

EK 25 参照



規格情報

| 製品番号 | 主要寸法 (mm) | | | | | | | | | | | | | | | | | | | 質量 (g) |
|--------------|-----------|------|---------|-----------|-----|-----|----|--------|--------|----|----|----|----------|-----|----|----|---------|---------|------|--------|
| | 本体 | | | | | | | | | | | | | | | | カラー | | | |
| | d1 | L | L1 | L2 | L3 | B | H | b±0.02 | h±0.02 | B1 | H1 | P | X | Y | Z | □T | L4 | L5 | | |
| EK4 P5/P0-C7 | 4 | 15 | 5.5 | 17.5/18.5 | 3/2 | 34 | 19 | 17 | 10 | 18 | 7 | 26 | 4.5 | - | - | 10 | 4.5/3.5 | 4.5/3.5 | 50 | |
| EK5 P5/P0-C7 | 5 | 16.5 | 5.5/6.5 | 19.5 | 3.5 | 36 | 21 | 18 | 11 | 20 | 8 | 28 | 4.5 | - | - | 11 | 5.5/4.5 | 5.5/4.5 | 68 | |
| EK6 | 6 | 20 | 5.5 | 22 | 3.5 | 42 | 25 | 21 | 13 | 18 | 20 | 30 | 5.5 | 9.5 | 11 | 12 | 5 | 7 | 120 | |
| EK8 | 8 | 23 | 7 | 26 | 4 | 52 | 32 | 26 | 17 | 25 | 26 | 38 | 6.6 | 11 | 12 | 14 | 5.5 | 7.5 | 230 | |
| EK10 | 10 | 24 | 6 | 29.5 | 6 | 70 | 43 | 35 | 25 | 36 | 24 | 52 | 9 | - | - | 16 | 5.5 | 5.5 | 430 | |
| EK12 | 12 | 24 | 6 | 29.5 | 6 | 70 | 43 | 35 | 25 | 36 | 24 | 52 | 9 | - | - | 19 | 5.5 | 5.5 | 420 | |
| EK15 | 15 | 25 | 6 | 36 | 5 | 80 | 50 | 40 | 30 | 41 | 25 | 60 | 11 | - | - | 22 | 10 | 10 | 530 | |
| EK20 | 20 | 42 | 10 | 50 | 10 | 95 | 58 | 47.5 | 30 | 56 | 25 | 75 | 11 | - | - | 30 | 11 | 11 | 1310 | |
| EK25 | 25 | 48 | 13 | 59 | 14 | 105 | 68 | 52.5 | 35 | 66 | 25 | 85 | <参照図面参考> | | | | 35 | 14 | 14 | 1950 |

※ EK-4、EK-5以外の全製品は、ベアリングの種類にかかわらず規格寸法は同一です。