







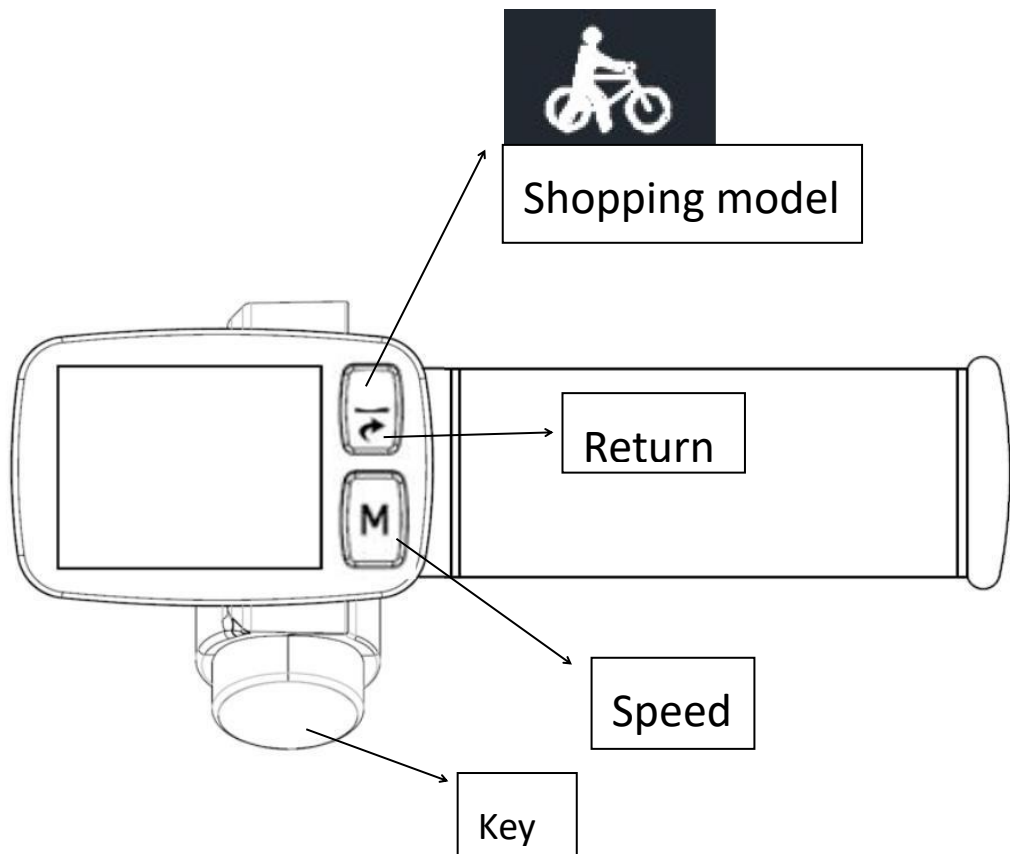

Display Button:

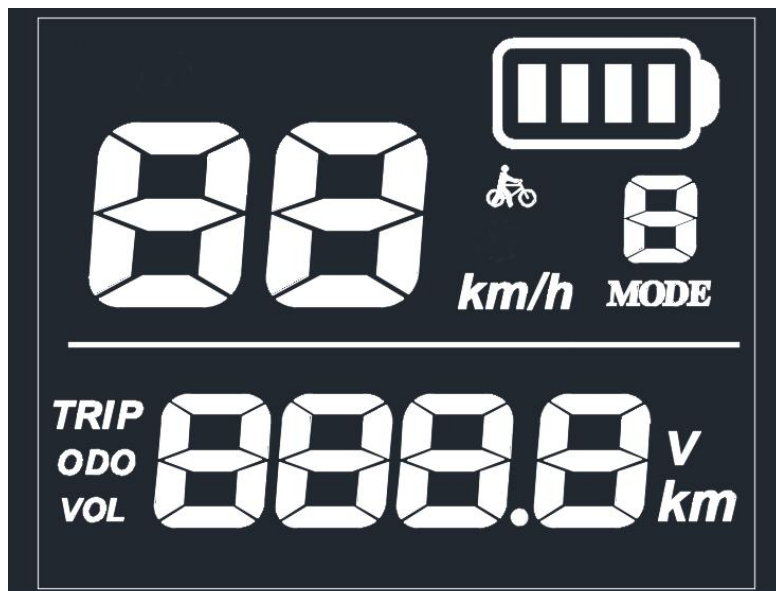

Display:



Functions:

Display	
Speed	
Power	
Battery voltage	
Odometer	
Speed shift	
Shopping model	

How to find the trip, odometer and voltage.

Press return button, you can see trip,
Press return again, you can see odometer.
Press return again, you can see voltage.

Battery

When the throttle display only one last bar power, you can still drive more, but suggest you charge at once

How to choose different speed

Scooter originally display 1 speed (Model 1 speed: forward-3mph,reverse -1.24mph)



Press **M**



Press **M** again




You can see 2 this pic
Model 2 speed: forward-6mph, reverse
-1.86mph



You can see 3 this pic
Model 3 speed: forward-9mph,
reverse-3.72mph














three speed
model

Shopping model	Press bike button for two seconds	→	You can see bike in the pic
			forward-3mph, reverse-1.24mph
	Press bike button for two seconds again		page go back


How to use the airline approved battery

Firstly, choose 24V voltage on the throttle,pls refer below.





1st step	Press two buttons for two seconds	→	You can see P1 this pic
			

2nd step	Press return button 		You can see P3 in the pic. 
3rd step	Press M button 		You can see 0024 is jumping. 
	Press two buttons for two seconds again		Page go back
4th step			





Secondly, close the scooter and plug out the battery wire ,Put 24V airline approved battery onto the scooter.

<p>Note:</p>	<p>If you use 48V battery again, you need to choose the voltage to 48V as according to the above steps, or the throttle display 009 error code. (it means battery's voltage does not match the throttle's voltage.)</p>	
--------------	---	---

How to make the LCD screen brighter

1. Press  and  two buttons for two seconds, You can see **P1** this pic
2. Press **M** button, you can see 0000,
Press **M** button, you can see 0001,
Press **M** button, you can see 0002,
Press **M** button, you can see 0003,
bigger number, brighter screen.
3. Press  and  two buttons for two seconds again, Page go back

How to clear the ODO

1. Press  and  two buttons for two seconds, You can see **P1** this pic
2. Press **return** button 12 times , you can see PE,
3. Press **M** button for two seconds, you can clear ODO,
4. Press  and  two buttons for two seconds again, Page go back

Error

Code	Problem
E001	Display can not receive the data from controller, or the data is wrong
E002	Controller can not receive the data from display, or the data is wrong
E003	Controller problem
E004	Motor hall problem
E005	Motor phase problem
E006	Throttle problem
E007	Brake problem
E008	Assistant sensor problem
E09	motor is in under voltage protection