


Ameritek Tabber Tabber/Labeler/Stamp Affixer

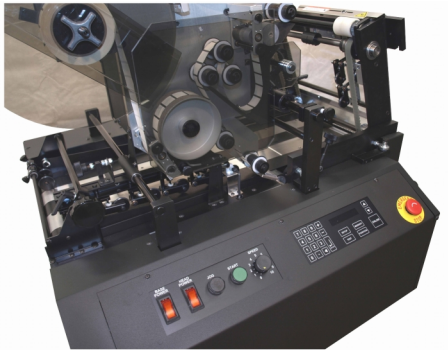

*** High Production
Tabbing, Labeling
and Stamping.**

*** Heavy duty
construction for
reliability and durability.**

*** Meet all requirements
of owner, operator and
USPS.**

*** Quick and easy job
setups.**

*** Microprocessor
controlled tab
placement**



TABBING – LABELING – STAMPING

Ameritek Tabber

TECHNICAL SPECIFICATIONS

Configurations

Standard (2") or wide (4 1/4") head systems available.
(As defined by the maximum width of backing material)

Speeds

Production Rates based on 8 1/2" product length or booklet with 5" height.

Single Tab: Up to 30,000 pieces/hour
Double Tab: Up to 24,000 pieces/hour
Triple Tab: Up to 18,000 pieces/hour
Booklet single tab: Up to 30K/hr w/ 1 1/2" tab
Booklet double tab: Up to 18K/hr w/ 1 1/2" tabs
Transport Belt: 0 to 600 ft/min
Tabbing Head: 0 to 375 ft/min

Application Speeds: Transport belt speeds of 0 to 600 ft/min for tabs < 2" in pitch.
Transport belt speeds of 0 to 375 ft/min for tabs > 2" in pitch.

Product Size

Minimum: 3" x 5"
Maximum: 13 1/2" x 17"
Minimum Thickness: 20 # folded sheet
Maximum Thickness: 7/16"

Tabs/Labels/Stamps

Self adhesive on roll with 3" core and minimum 1/16" gap between tabs, labels, or stamps.

Min. Width: 3/4" backer width
Max. Width: 2" backer – Standard
4 1/2" backer – Wide

Min. Pitch: 3/4"
Max Pitch: 7"

Types: tabs, labels, stamps, repositionable notes, scratch-offs, customized stickers, machine grade paper, clear or translucent.

Note: clear and translucent tabs require an "engineered backer" with printed registration marks for indexing.

Roll Size: Up to 19 1/2" diameter mounted on a 3" core.
Approx. Roll Capacity: 40,000 - 1" tabs

Tab Placement

Accuracy: +/- 1/8" repeatability

Physical Size

System Length: 37"
System Width: 33"
System Height: 71"
Tabletop Height: 32 3/4" to 35" - Standard
35 3/4" to 38" - Optional
Weight: Approx. 450 lbs.

Electrical Requirements

115 VAC 50/60 Hz @ 10 Amps or
230 VAC 50/60 Hz @ 5 Amps

The Ameritek Tabber applies tabs, labels, stamps, repositionable post-it notes, and scratch-offs to a wide variety of media including tri-fold brochures, newsletters, small catalogs and many others. It is designed for professional mailers, commercial printers, fulfillment houses or anyone else requiring a heavy-duty high quality Tabber/Labeler/Stamp Affixer.

It has front panel controls that are easy to use, making it simple to set up jobs or to switch between applications.

The Ameritek Tabber can be used inline with most friction feeders, inkjet print systems, conveyors and even some folders. It can also be run offline with a feeder in stand alone operation.



The Ameritek Tabber can also be configured as a Dual Headed Tabber. This system can tab on the leading (toe) and trailing (heel) edges of a booklet in a single pass. The Dual Headed Tabber can run in-line or off-line as a system, or the Tabbers can be unlocked and used as standalone units.

Authorized Dealer: