



Mercedes-Benz Electric Intelligence Branded Elements Kit

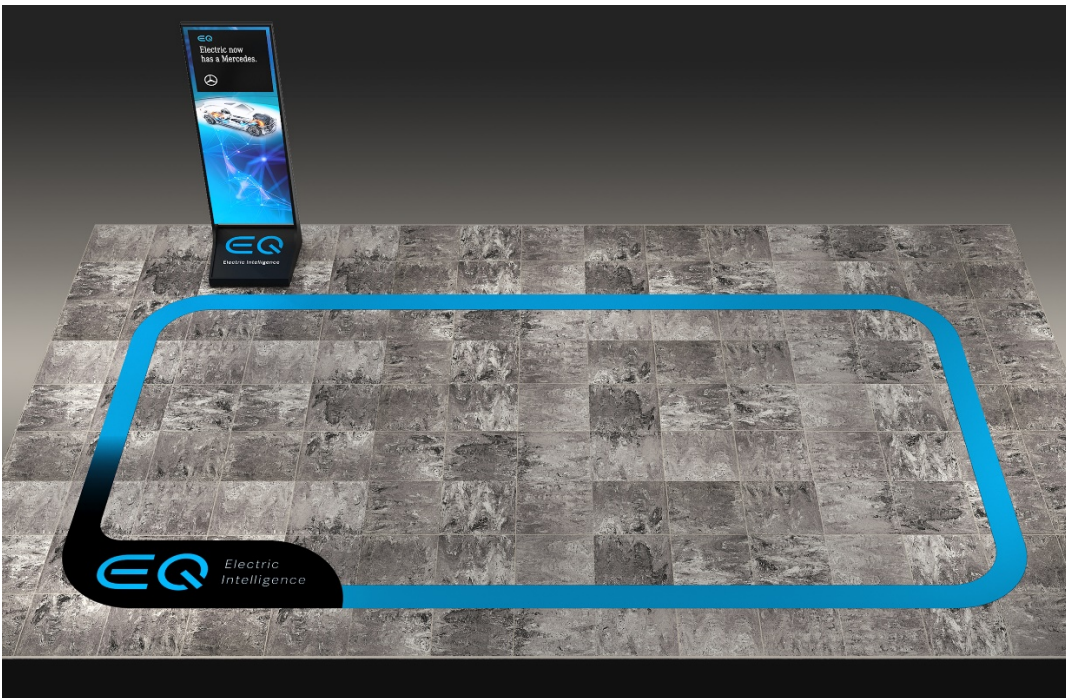

Electric Intelligence
by Mercedes-Benz

Item	Per Piece Price
Illuminated Totem	\$ 3,250.00
Floor & Vehicle Graphic Kit	\$ 650.00

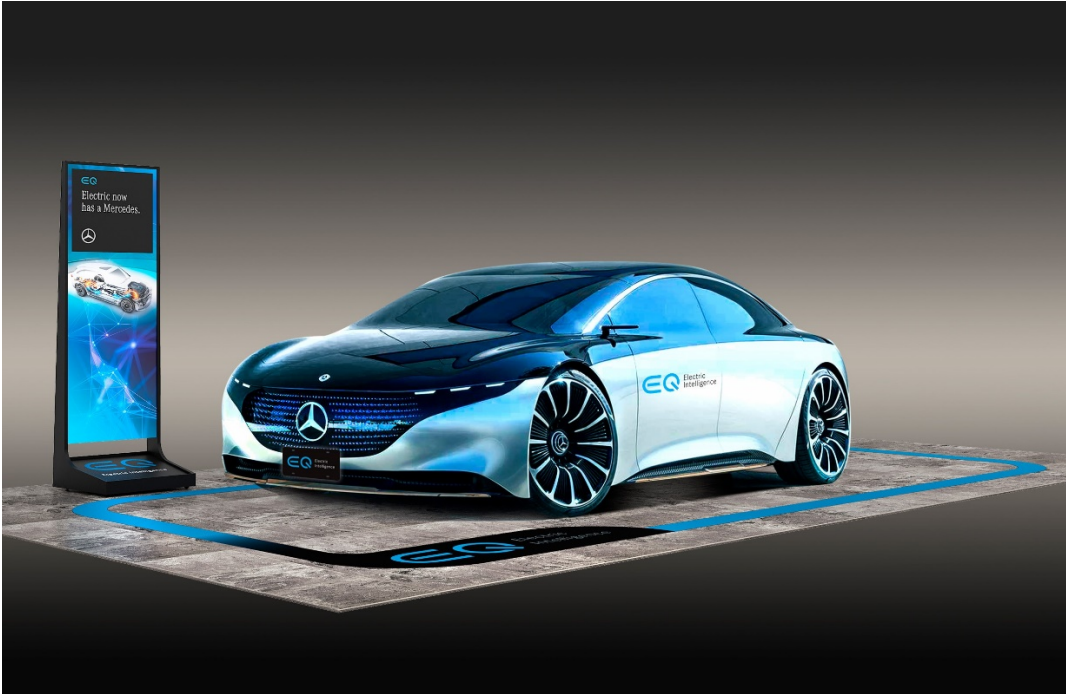



Electric Intelligence
by Mercedes-Benz

Lit Totem Product Specifications

- Illuminated double-sided iMBrite™ Edge fabric graphic lightbox with on/off switch
- Durable painted metal frame
- Dye sublimated fabric for vivid color graphics
- Easy to change out fabric inserts with new graphics
- On locking casters for repositioning
- No assembly needed

Dimensions: 28" W x 86" H x 25" D

Assembly: No assembly needed.

Electrical Requirements:

Comes with a 10' cord that plugs into a standard 110v outlet.

Cleaning:



Wash coated metal surfaces with a soft cloth soaked in detergent and warm water; rinse thoroughly. Remove scuff marks and scratches from high gloss coatings using automotive polishing compounds, either liquid or paste. After polishing, apply a pre-softened automotive paste wax to restore original sheen.

Fabric insert: Machine wash with cold water and mild soap and tumble dry under low heat.



Electric Intelligence
by Mercedes-Benz

Lit Totem Product Specifications

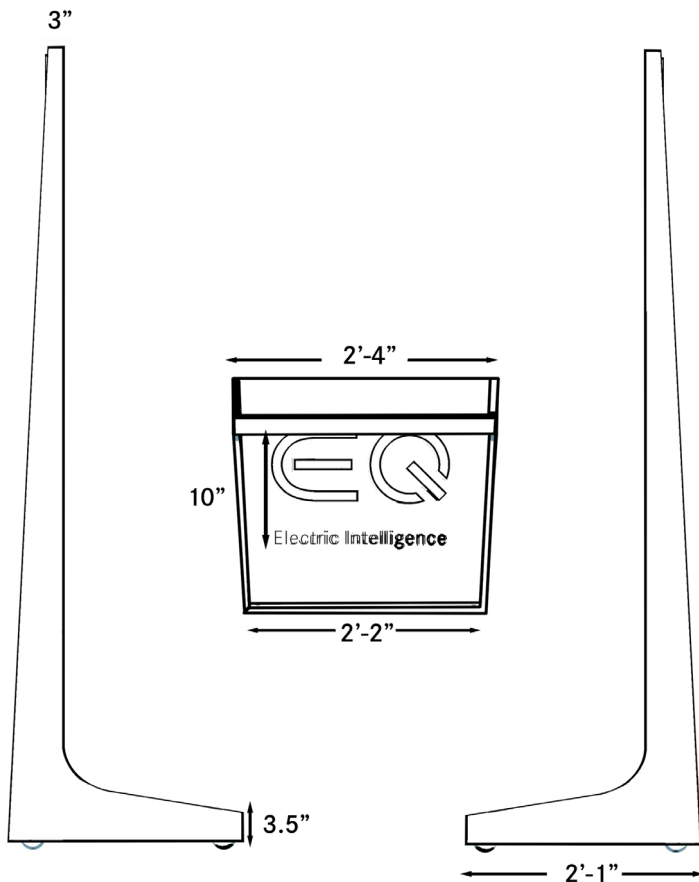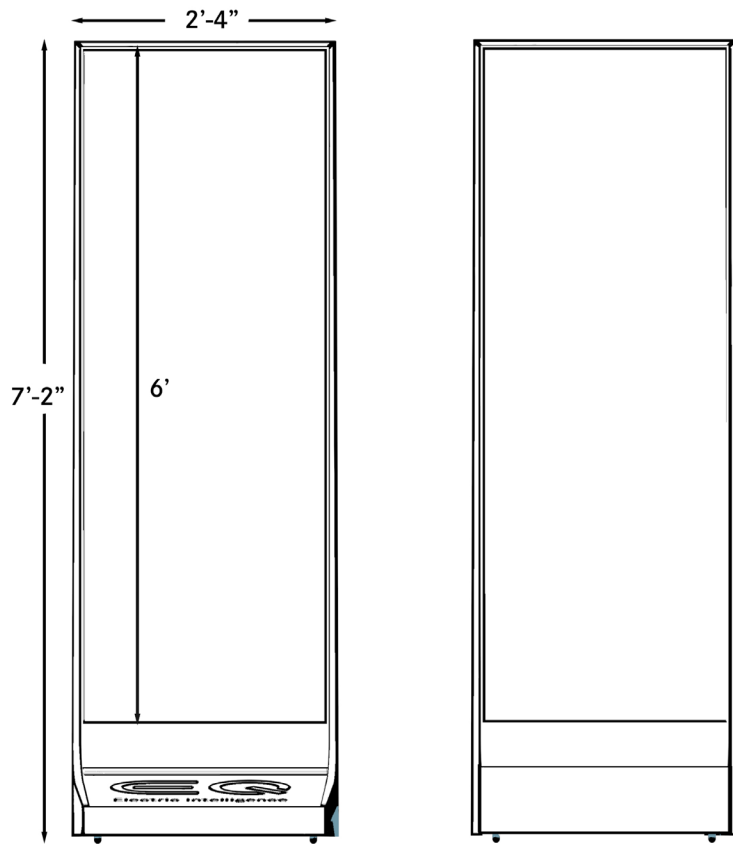



Dimensions:

Overall 260" W x 134" H, strip 8" W

Installation:

See reverse side for detailed instructions.

Cleaning:

The surface is durable enough for hospitals and can be cleaned with most commercial floor cleaning solutions. Avoid over saturating.

Removal:

Lift a corner of the material and pull slowly at an angle of approximately 45° to 75°. At an angle over 90° the adhesive is more likely to leave residue on the substrate. The temperature, along with the angle and speed at which you remove the vinyl, prevents adhesive residue or damage to occur to the application surface.



Electric Intelligence
by Mercedes-Benz


Floor Graphic Product Specifications

- Vibrant color printed with environment friendly latex ink
- Non-slip laminate rated for floors
- Adheres to a variety of smooth floor surfaces
- Easy to clean



Electric Intelligence
by Mercedes-Benz


Floor Graphic Product Specifications

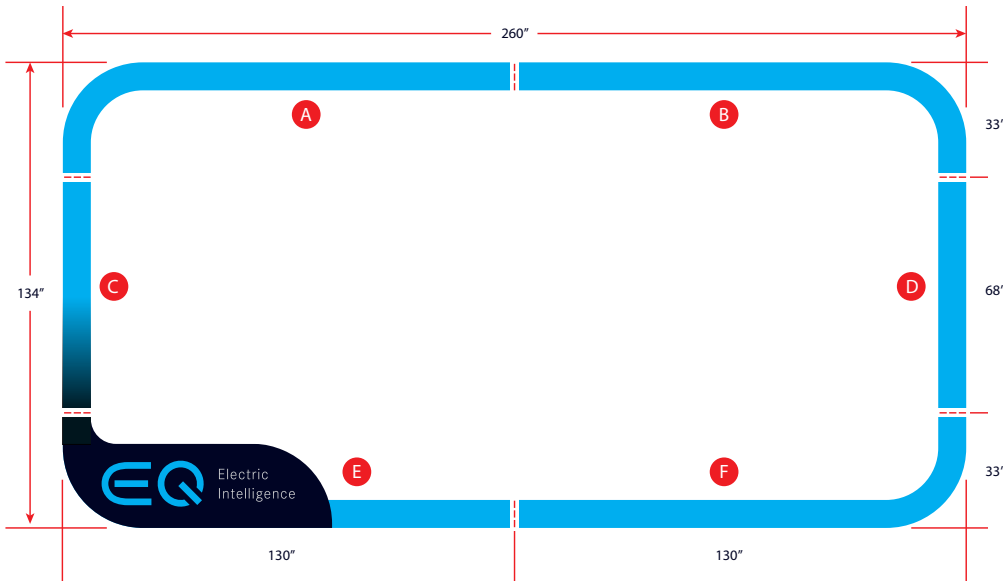

Installation:

Graphics should be applied to a clean and dry surface. Ideal for a variety of smooth floor surfaces. We recommend acclimating the graphics to the same application temperature for a few hours before beginning the application process.

1. Use care when transporting the graphic and removing the release liner. The graphic should not be bent or distorted because the film will not flatten after being creased.
2. The surface where the graphic is to be applied must be clean and free of dust and dirt particles. These types of inclusions may cause small air pockets in the image.
3. Prior to application, clean the surface with a soap and water mixture. Use a window squeegee to remove any excess water and wipe the edges dry with a lint-free cloth. Window cleaners or other chemical products are not recommended as they can leave streaks or residue on the surface.
4. A low tack tape, such as painter's tape, can be used to position the graphic in the correct location and straight on the surface. Put a small piece of tape on the surface to help line up the top and side edges of the graphic.
5. Start by installing section A and then move on to sections B, C, D, E and F in that order. Each panel will overlap the previous panel by .5\".
5. Do not completely remove the release liner before starting the application process. Pull it back a few inches on the edge of the graphic and fold the release liner to create a hinge.
6. Position the graphic's exposed adhesive in the location that was marked beforehand with the tape. With a felt pad, apply the edge of the graphic to the surface. Work toward the opposite edge of the graphic, slowly pulling the release liner to gradually expose the adhesive and working from top to bottom as the graphic is installed.
7. When installing the graphic, carefully work out any air bubbles with a felt pad. The graphic can be pulled back and re-installed, if needed. It can also be re-positioned during installation.

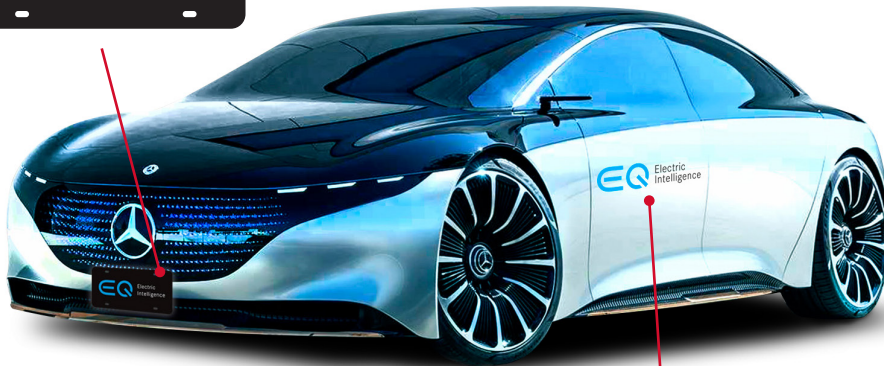

Electric Intelligence
by Mercedes-Benz

Vehicle Graphics Product Specifications

Dimensions:

Door decal: 30" W x 17.13" H

License plates: 12" W x 6" H

Installation:

Door decal: See reverse side for detailed instructions.

License plates: Screw onto vehicle license plate holder with screws (not provided).

Front plate is optional depending on state.

Cleaning:

Can be cleaned with most commercial cleaning solutions. Avoid over saturating.

Door Decal Removal:

Lift a corner of the material and pull slowly at an angle of approximately 45° to 75°. At an angle over 90° the adhesive is more likely to leave residue on the substrate. The temperature, along with the angle and speed at which you remove the vinyl, prevents adhesive residue or damage to occur to the application surface.

- Vibrant color printed with environment friendly latex ink
- Easy to apply
- Easy to clean



Electric Intelligence
by Mercedes-Benz

Vehicle Graphics Product Specifications

Door Decal Installation:

Graphics should be applied to a clean and dry surface. We recommend acclimating the graphics to the same application temperature for a few hours before beginning the application process.

1. Use care when transporting the graphic and removing the release liner. The graphic should not be bent or distorted because the film will not flatten after being creased.
2. The surface where the graphic is to be applied must be clean and free of dust and dirt particles. These types of inclusions may cause small air pockets in the image.
3. Prior to application, clean the surface with a soap and water mixture. Use a window squeegee to remove any excess water and wipe the edges dry with a lint-free cloth. Window cleaners or other chemical products are not recommended as they can leave streaks or residue on the surface.
4. A low tack tape, such as painter's tape, can be used to position the graphic in the correct location and straight on the surface. Put a small piece of tape on the surface to help line up the top and side edges of the graphic.
5. Do not completely remove the release liner before starting the application process. Pull it back a few inches on the edge of the graphic and fold the release liner to create a hinge.
6. Position the graphic's exposed adhesive in the location that was marked beforehand with the tape. With a felt pad, apply the edge of the graphic to the surface. Work toward the opposite edge of the graphic, slowly pulling the release liner to gradually expose the adhesive and working from top to bottom as the graphic is installed.
7. When installing the graphic, carefully work out any air bubbles with a felt pad.