


- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS
- REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
   MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

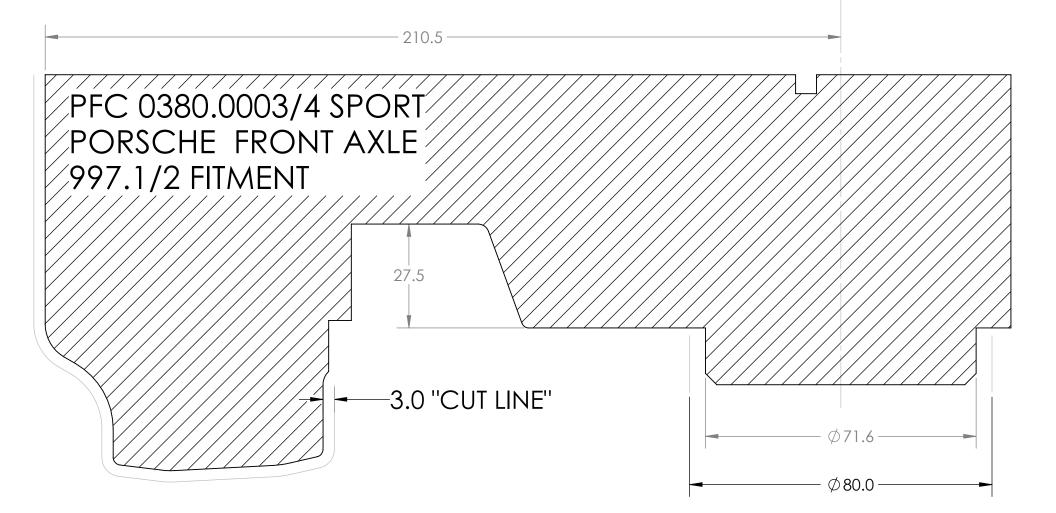

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM. 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY
- SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

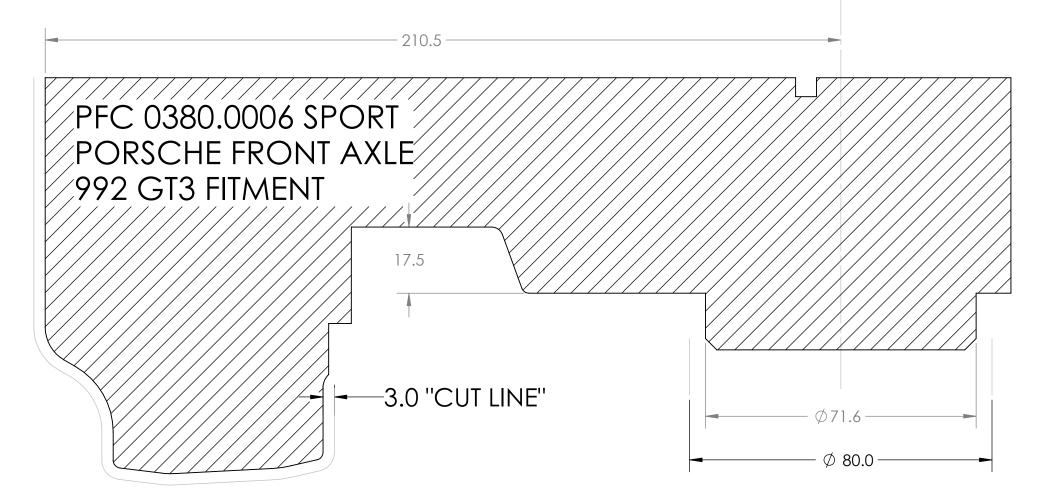

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM. 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY
- SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

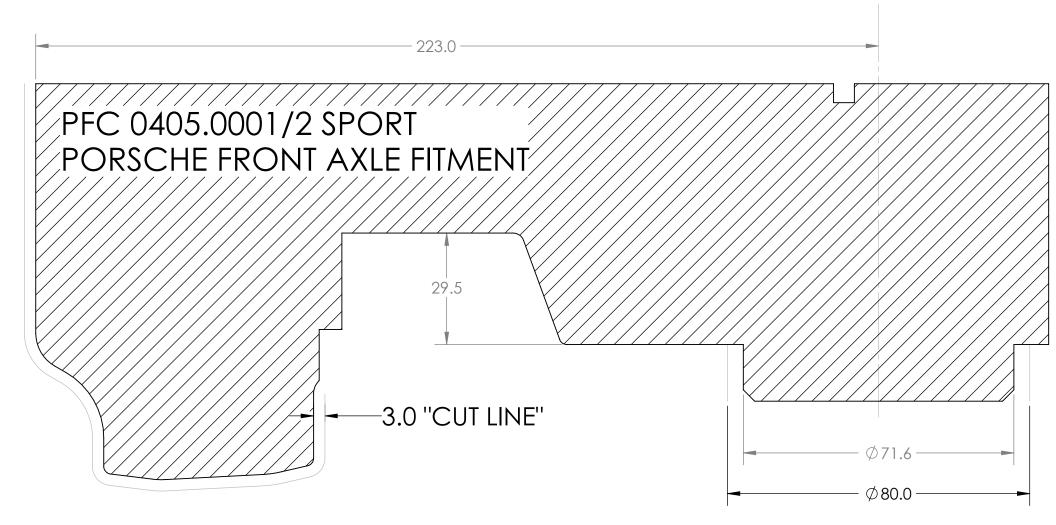

- ALL DIMENSIONS ARE IN MILLIMETERS. 1.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS 2. REQUIRED, RECCOMENDED CLEARANCE IS 5MM. 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY
- SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	83 CARBON METALLIC HIGHWAY CLOVER, SC 29710

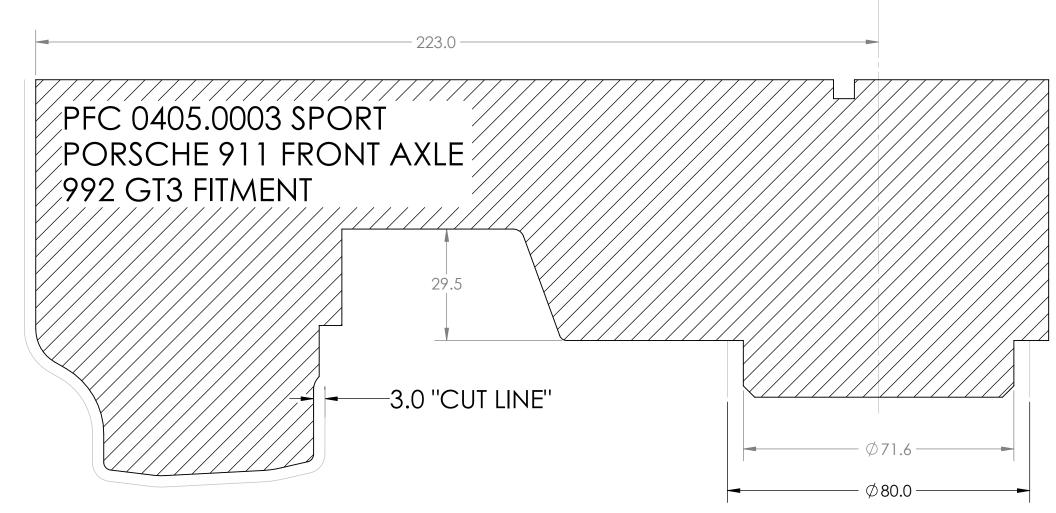

- ALL DIMENSIONS ARE IN MILLIMETERS. 1.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS 2. REQUIRED, RECCOMENDED CLEARANCE IS 5MM. 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY
- SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

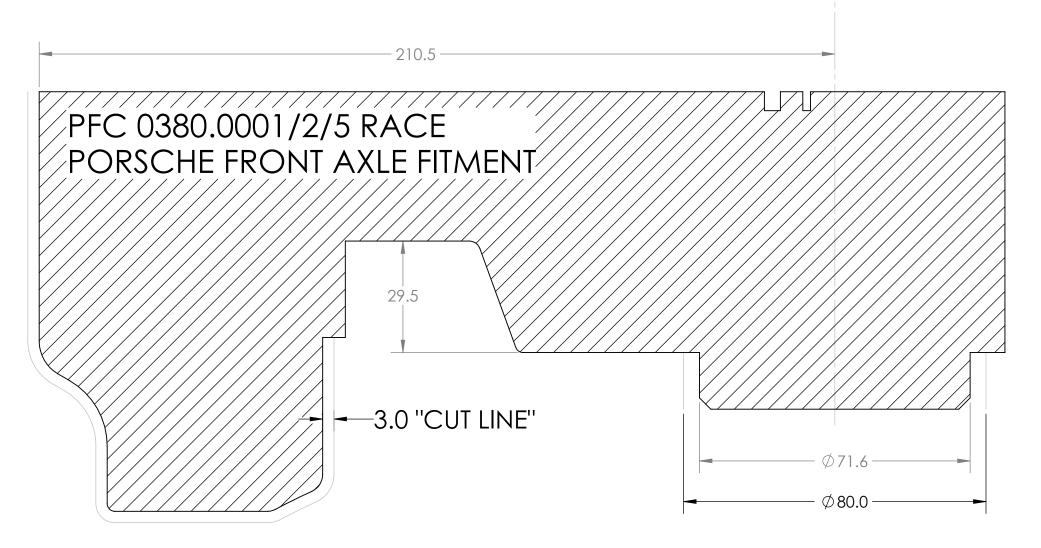

- ALL DIMENSIONS ARE IN MILLIMETERS. 1.
- TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
   MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL




PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

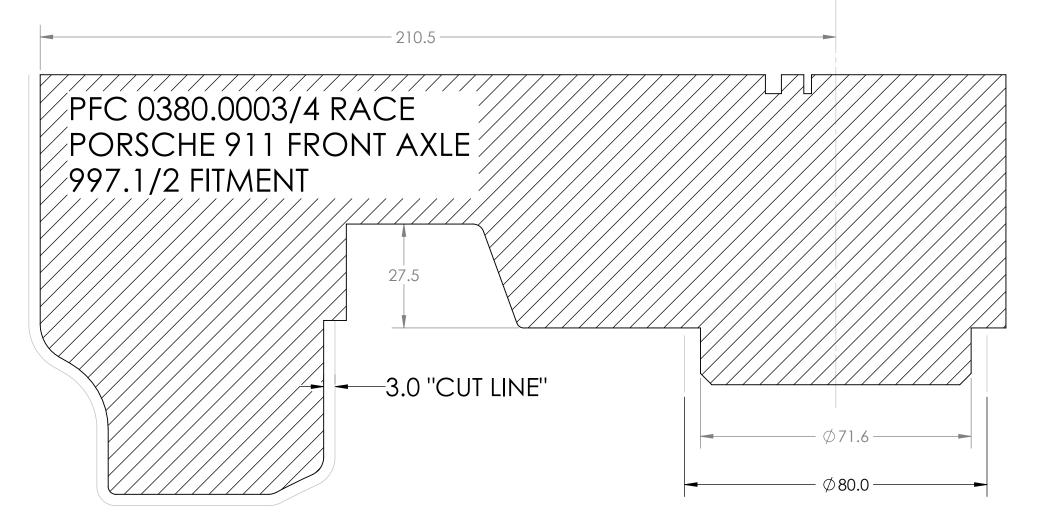

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS
- REQUIRED, RECCOMENDED CLEARANCE IS 5MM.
  3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL



PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710

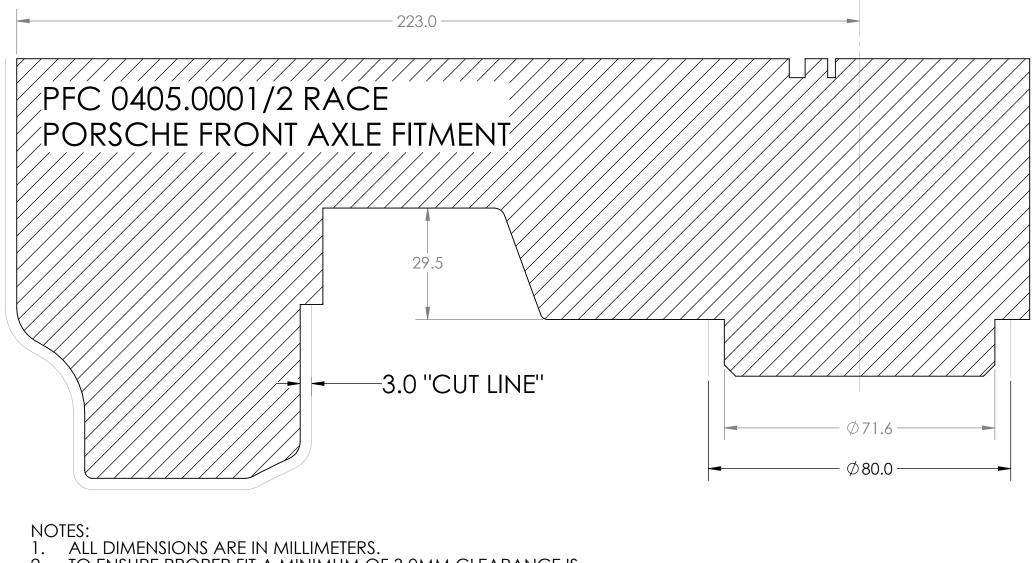

- 2. TO ENSURE PROPER FIT A MINIMUM OF 3.0MM CLEARANCE IS REQUIRED, RECCOMENDED CLEARANCE IS 5MM. 3. MUST BE PRINTED ON 8.5X11 PAPER FOR PROPER SCALING, VERIFY
- SCALE BY CONFIRMING AT LEAST TWO DIMENSIONS.
- 4. CUT ALONG "CUT LINE" DIMENSIONS FOR 3MM CLEARANCE TO WHEEL

Ē		_

PFC PART NO.	FILE NAME	CREATED DATE	DRAWN BY	PERFORMANCE FRICTION CORP 83 CARBON METALLIC HIGHWAY
NA	ZR95 PROFILES - PORSCHE	01/07/22	J. BORNER	CLOVER, SC 29710