


Pendleton with Rinse

AUSH.4173

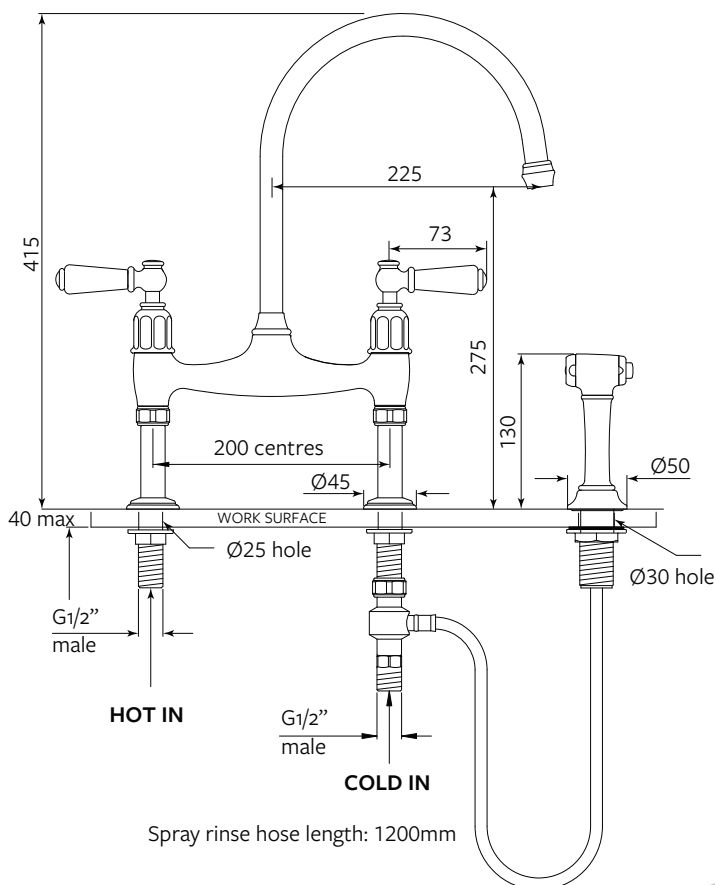

Spray rinse hose length: 1200mm

MODEL	CODE
Pendleton with Rinse - Chrome	AUSH.4173CPWPC
Pendleton with Rinse - Nickel	AUSH.4173NIWPC
Pendleton with Rinse - Pewter	AUSH.4173PFWPC
Pendleton with Rinse - English Bronze	AUSH.4173EBWPC
Pendleton with Rinse - Satin Brass	AUSH.4173SBWPC
Pendleton with Rinse - Polished Brass	AUSH.4173BRWPC
Pendleton with Rinse - Gold (<i>special order</i>)	AUSH.4173IGWPC

Also Available: Pendleton (AUSH.4193) non spray-rinse model.



Features include:

- Handcrafted in the United Kingdom using DZR brass
- Separate bench-mounted insulated spray rinse tap with 1.2m flexible hose
- White porcelain handles with Shaws insignia indices
- 1/4 turn German ceramic disc flow control
- Vernier insert for accurate handle alignment
- Supplied with dual check valve - Con-Serv DC 057
- 15 Year warranty. Please visit our website for individual finish warranties

Spray Rinse Requirements :

The spray rinse requires a minimum inlet water pressure of 100kPa, and a maximum of 500kPa to completely divert the water flow from the tap to the spray rinse.

Temperature range: Min 1°C. Max 70°C

Working Pressure: Min 1 Bar/15psi. Max 5 Bar/75psi

Packed Weight: 4.48kg

Flow Rates: 1 Bar: 6.2L/min

2 Bar: 9.9L/min

3 Bar: 12.7L/min



WaterMark

ASINZS 3718

WMKA02818

SAI Global

Perrin & Rowe

tapware



4.0

litres per minute (spray tap)

Licence No. 1938

Second grade

5 stars

7 litres per minute