


Contact us at Zano Controls,
 Unit 1&2 Chantry Court,
 Wrythe Lane,
 Carshalton,
 Surrey,
 SM5 2DG.
 Tel: 0345 519 5858
 email: sales@zаноcontrols.co.uk



ZANO LED MODULES DATA SHEET: CENTRE
 MADE IN GREAT BRITAIN

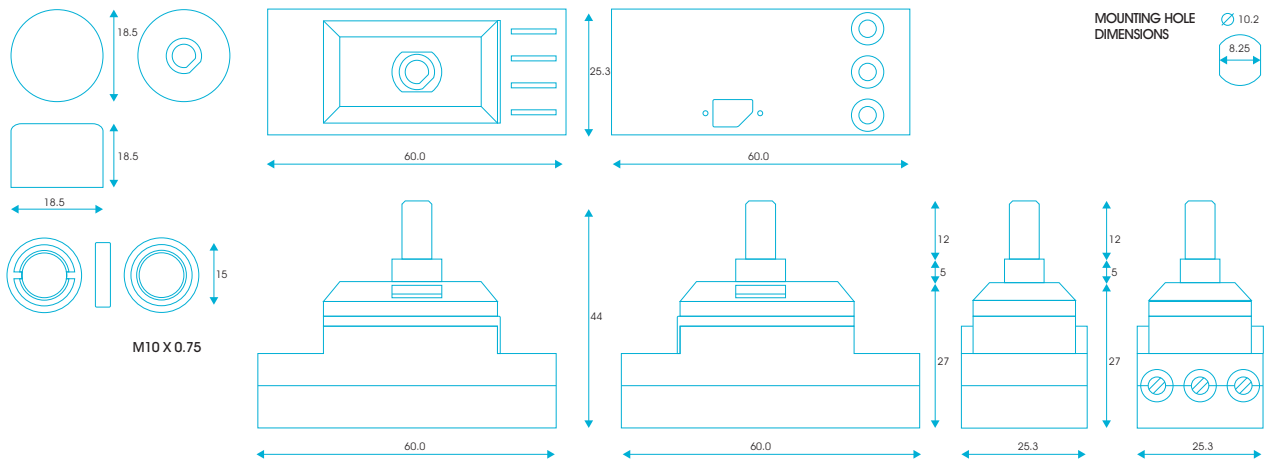

COMPATIBLE LOAD TYPE	LED
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY
PROTECTION	OVERLOAD/THERMAL
SMART SETTINGS	YES
DB NOISE DURING OPERATION	- 110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V- 240V AC
FREQUENCY RANGE	40 - 50Hz +/- 10%
MAX OPERATING TEMPERATURE	70° C
RH RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	35° C
MINIMUM AMBIENT TEMPERATURE	0° C
TERMINAL TORQUE MAX SETTING	0.5 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE


PART CODES	ZMC150	ZMC250
MAX LOAD*	150W / VA	250W / VA
MIN LOAD*	0W / VA	5W / VA

* Per Dimmer

MAXIMUM PLATE LOAD RECOMMENDATIONS

COVER PLATE SIZE	LED RATING
SINGLE PLATE	320W / VA
DOUBLE PLATE	640W / VA
6-8 GANG	1280W / VA

DIMMER

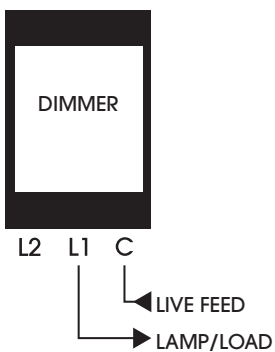

2-WAY SWITCH AND DIMMER

