



REACH IN REFRIGERATOR

KR-49BG

Bottom Mounted / 2 Glass Door



TECHNICAL SPECIFICATIONS

| | |
|-----------------------|-----------------|
| Voltage/Frequency | 115V/60Hz |
| Refrigerant | R290 |
| Type of Defrost | Automatic |
| Interior Material | Stainless Steel |
| Exterior Material | Stainless Steel |
| Temperature Range °F | 33 ~ 41°F |
| Compressor Power (HP) | 1/2+ |
| Nema Config. | NEMA5-15P |



PRODUCT FEATURES



The compressor is mounted in the bottom for better heat evaporation.



Digital temperature controls with LED display for precise adjustment and automatic defrost.



Hinged glass doors, tempered glass, UV blocking.



R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.



Epoxy coated wire shelves.



Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.



High quality coated stainless adjustable shelves prevent peel and rust.



Adjustable front locking casters.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

 1-562-907-8090

 Sales@chefaaa.com

www.ChefAAA.com


DETAILS & SPECIFICATIONS

KR-49BG

Front View



Side View

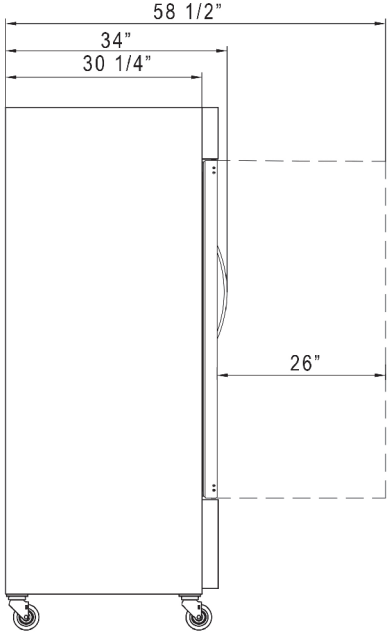

MODEL KR-49BG

| | |
|---------------------------|--------------|
| Rated Voltage | 115V |
| Rated Frequency | 60Hz |
| Total Input Power | 730W |
| Total Current | 8.6A |
| Total Capacity | 41.73 cu ft |
| Climatic Category | 4-5 |
| Protection Type | I |
| Design Pressure High Side | 300 PSIG |
| Design Pressure Low Side | 150 PSIG |
| Insulation Blowing Gas | C-Pentane |
| Refrigerant | R290/4.58 oz |

| MODEL | EXTERNAL DIMENSION WXDXH (INCHES) | PACKAGING DIMENSION WXDXH (INCHES) | PRODUCT NET WEIGHT | # OF SHELVES | 40HQ CONTAINER CERT. |
|---------|--------------------------------------|---------------------------------------|-----------------------|-----------------|-------------------------|
| KR-49BG | 55 1/8 x 34 x 80 3/8 | 57 1/8 x 35 x 82 3/8 | 595 lbs | 8 | 21 |



1-562-907-8090
 @ Sales@chefaaa.com
 www.ChefAAA.com