REACH IN FREEZER

Bottom Mounted / 2-Solid Door





1 TECHNICAL SPECIFICATIONS

Voltage/Frequency
Refrigerant R290
Type of Defrost
Interial Material
Exterior Material
Temperature Range 'F 0 ~ -8°F
Compressor Power (HP) 1Nema Config. NEMA5-15P



PRODUCT FEATURES


- The compressor is mounted in the bottom for better heat evaporation.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 0 to -8 degrees Fahrenheit
- Self closing doors with stay open feature.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.




HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

DETAILS & SPECIFICATIONS

T55F

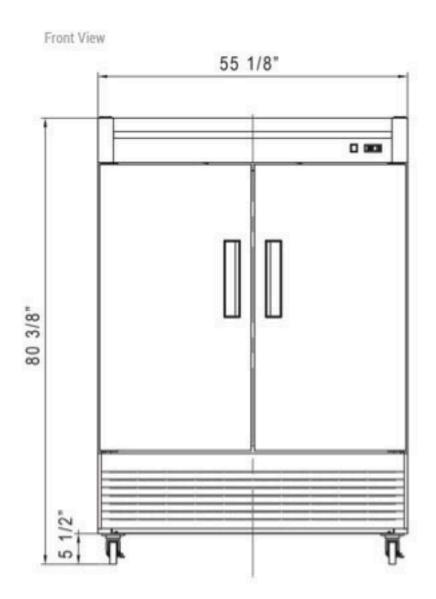

Side View

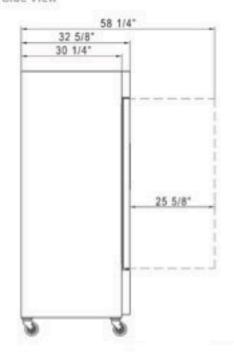

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	1250W
Total Current	11.8 A
Total Capacity	40.74 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/5.11 oz

j	MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)		Control of the Contro	40HQ CONTAINER CERT.
	T55F	55 1/8 x 32 5/8 x 80 3/8	57 1/8 x 34 5/8 x 82 3/8	463 lbs	8	21











