

REACH IN REFRIGERATOR TR-23BG

Bottom Mounted / Glass Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency

115V/60Hz

Refrigerant

R290

Type of Defrost

Automatic

Interior Material

Stainless Steel

Exterior Material

Stainless Steel

Temperature Range °F

33 ~ 41°F

Compressor Power (HP)









1/5

Nema Config.

NEMA5-15P



PRODUCT FEATURES

-  The compressor is mounted in the bottom for better heat evaporation.
-  Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
-  Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
-  Hinged glass doors, tempered glass, UV blocking.
-  R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
-  Epoxy coated wire shelves.
-  Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
-  High quality coated stainless adjustable shelves prevent peel and rust.




**HIGH QUALITY
STAINLESS STEEL &
ROBUST DESIGN**


DETAILS & SPECIFICATIONS

TR-23BG

Front View

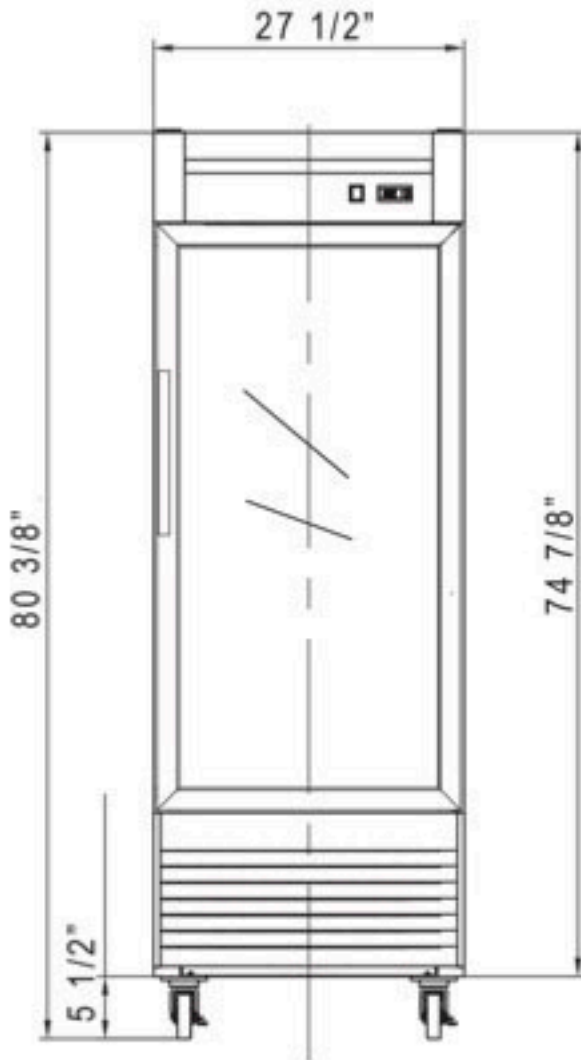

Side View

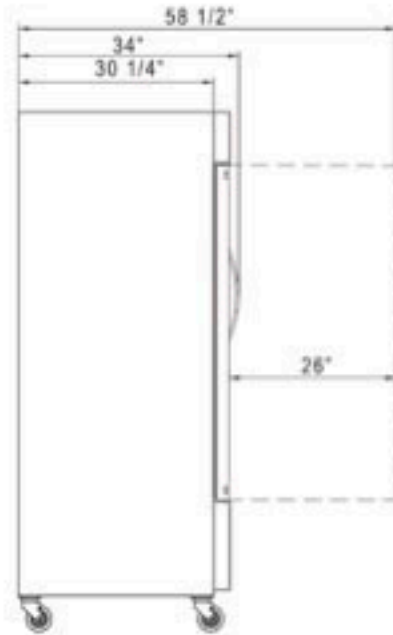

Rated Voltage	115V
Rated Frequency	60Hz
Total Input Power	260W
Total Current	3.1A
Total Capacity	17.79 cu ft
Climatic Category	4-5
Protection Type	I
Design Pressure High Side	300 PSIG
Design Pressure Low Side	150 PSIG
Insulation Blowing Gas	C-Pentane
Refrigerant	R290/3.17 oz

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
TR-23BG	27 1/2 x 34 x 80 3/8	29 1/2 x 35 x 82 3/8	344 lbs	4	39

