SALAD PREP TABLE TSP72

3-Door / Regular Top





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Exterior Material Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/3

Interial Material Stainless Steel Nema Config. NEMA5-15P




PRODUCT FEATURES


- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defros, ting system.
- Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- 6" deep 1/6 plastic plan included
- High quality coated stainless adjustable shelves prevent peel and rust.



DETAILS & SPECIFICATIONS

SALAD PREP TABLE TSP72

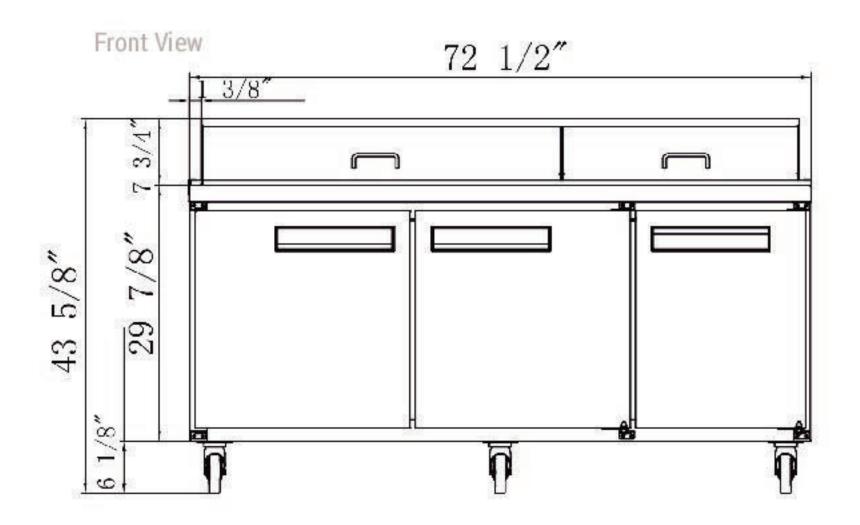

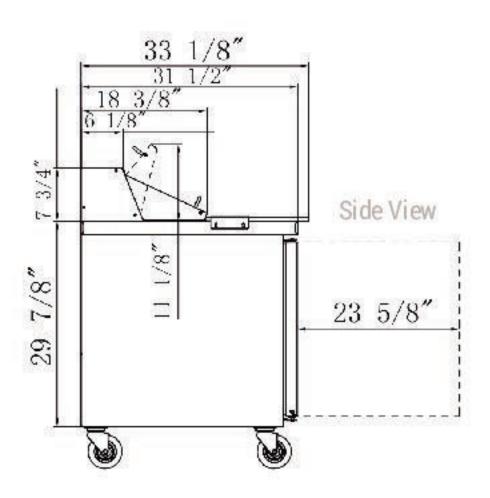

1/6 PAN COUNT: 18

1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6

Cutting Board Size 72 x 14.5 Rated Voltage 115V Rated Frequency 60Hz **Total Input Power** 380W **Total Current** 3.4A 17.58 cu ft **Total Capacity** Climatic Category 4-5 Protection Type Design Pressure High Side 300 PSIG Design Pressure Low Side 150 PSIG **Insulation Blowing Gas** C-Pentane R290/4.41 oz Refrigerant

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)		The state of the s	40HQ CONTAINER CERT.
TSP72	72 1/2 x 31 1/2 x 44	76 3/4 x 35 7/8 x 48 3/8	341 lbs	3	26











