



Balau - Smooth Profile

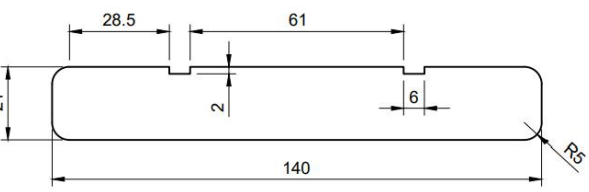

Installed with a 5mm gap between each row of boards to allow surface run off after rainfall. Boards to be fixed with stainless steel screws, finishing flush with the deck surface. Two screws per board per joist.

Adjustable plastic pedestals 35-55mm base unit. Compatible with 20 and 40mm height adjusters to achieve heights of up to 295mm. Pedestals can be adjusted for use on surfaces which have varying heights to create a level deck / deck with slight fall for drainage.

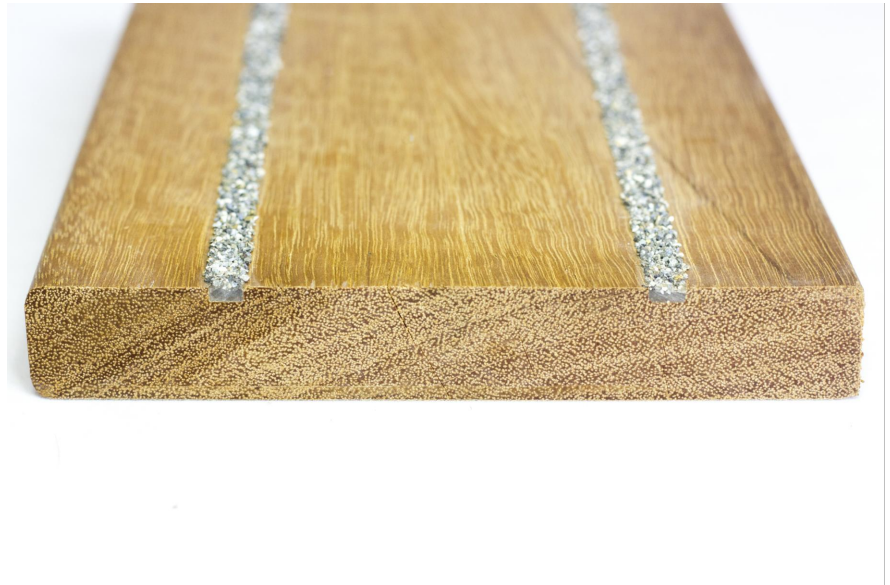

Gripsure Yellow Balau
 21x140 Yellow Balau
 Smooth profile with two grey non-slip inserts
 FSC certified sustainable timber

Standards
 Class 1 durability against BS EN 350:2016
 PTV of 85 against UKSRG guidelines using Stanley Pendulum test BS 7976-1:2002+A1:2013
 TDCA Deckmark Plus accredited



Created by Sam Baynham	06/02/2021	Approved by Mike Nicholson
Document type Drawing dimensions in mm	Document status Final revision	
Title Gripsure Yellow Balau, Smooth Profile	Contact Tel: 01726 844616 info@gripsure.co.uk www.gripsure.co.uk	
Rev. 1	Date of issue 06/02/2021	Sheet 1/1

Installed on Timber Joists and Pedestals