



Cumaru Profile

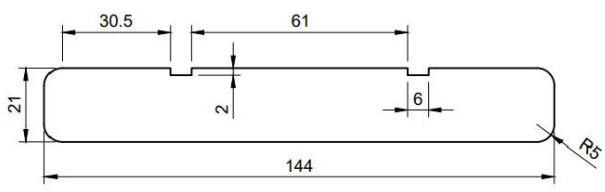

Installed with a 5mm gap between each row of boards to allow surface run off after rainfall. Boards to be fixed with stainless steel screws, finishing flush with the deck surface. Two screws per board per joist.

**Gripsure Cumaru**  
 21x144 Cumaru  
 Smooth profile with two grey non-slip inserts  
 FSC certified sustainable timber

**Standards**  
 Class 1 durability against BS EN 350:2016  
 PTV of 85 against UKSRG guidelines using Stanley Pendulum test BS 7976-1:2002+A1:2013  
 TDCA Deckmark Plus accredited

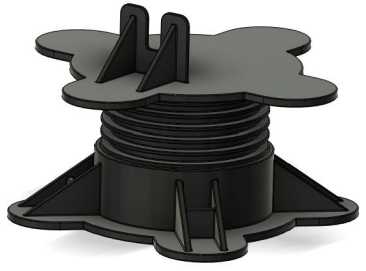

Adjustable plastic pedestals 35-55mm base unit. Compatible with 20 and 40mm height adjusters to achieve heights of up to 295mm. Pedestals can be adjusted for use on surfaces which have varying heights to create a level deck / deck with slight fall for drainage.

Created by <b>Sam Baynham</b> 06/02/2021		Approved by <b>Mike Nicholson</b>	
Document type <b>Drawing dimensions in mm</b>		Document status <b>Final revision</b>	
Title <b>Gripsure Cumaru</b>		Contact Tel: 01726 844616 info@gripsure.co.uk www.gripsure.co.uk	
Rev.	Date of issue	Sheet	
1	06/02/2021	1/1	

Installed on Timber Joists and Pedestals