


Cumaru - Smooth Profile

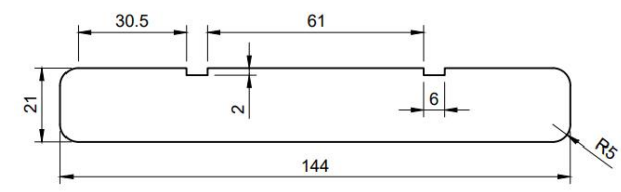

150mm x 50mm bearers
 150mm x 50mm joists
 100mm x 100mm posts

Installed with a 5mm gap between each row of boards to allow surface run off after rainfall. Boards to be fixed with stainless steel screws, finishing flush with the deck surface. Two screws per board per joist.

Gripsure Cumaru
 21x144 Cumaru
 Smooth profile with two grey non-slip inserts
 FSC certified sustainable timber

Standards
 Class 1 durability against BS EN 350:2016
 PTV of 85 against UKSRG guidelines using Stanley Pendulum test BS 7976-1:2002+A1:2013
 TDCA Deckmark Plus accredited



Created by Sam Baynham	06/02/2021	Approved by Mike Nicholson
Document type Drawing dimensions in mm	Document status Final revision	
Title Gripsure Cumaru	Contact Tel: 01726 844616 info@gripsure.co.uk www.gripsure.co.uk	
Rev.	Date of issue	Sheet
1	06/02/2021	1/1

Installed on Timber Joists and Posts