

FAIL SER

VEHICLE CUSTOMISATION SHOP

INSTRUCTION MANUAL

HIDE AWAY MOUNT

HOLLEY SNIPER EFI



COYOTE ENGINE SWAP VEHICLE RESTORATION



PREMIER CLASSIC TRUCK CHASSIS



Contact US **480 - 621 - 6072**




www.fatfender.com

HIDE AWAY MOUNT - HOLLEY SNIPER EFI



Package Includes:

- Controller Mount
- Mounting Surface
- Mounting Block
- Hardware

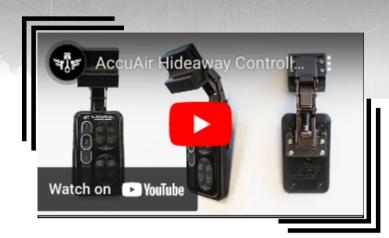

Step 1: Mount Controller

- Screw the controller mount to the smaller mounting surface of the hinge using the provided 6-32 x ¼" button head screws.
- We recommend applying blue Loctite.






This is an orientation and screw location reference photo.


Step 2: Attach Blocks

- Screw the mounting block to the larger mounting surface of the hinge using the provided 6-32 x ¼" button head screws.
- We again recommend applying blue Loctite.



Step 3: Drill Holes


- The holes that you need to drill for the mounting block are 1" apart. We recommend using a 5/32" drill bit.
- Once you have drilled your holes, you can install the hinge assembly under your dash using the provided 10/32 x 3/8" button head screws.






Step 4: Test Fitment

- Check to make sure that the Hideaway mount is snug and secure and test its function.
- Any loose screws can have Loctite added to them, to further ensure their durability.





FAT FENDER GARAGE

We're always happy to serve you. If you have any suggestions or comments regarding our products and services, please feel free to share them with us. We will be glad to hear from you. We highly value our customers.

-THANK YOU





www.fatfender.com