THANKYOU FOR YOUR ORDER





COASTWOOD BUNK ASSEMBLY INSTRUCTIONS

For sizes Single and King Single


Thank you for your purchase.

Please follow the instructions below for correct assembly.

TOOLS REQUIRED:

- Hammer
- Battery drill or screw driver with pozi drive or no. 2 square drive.

PARTS LIST:

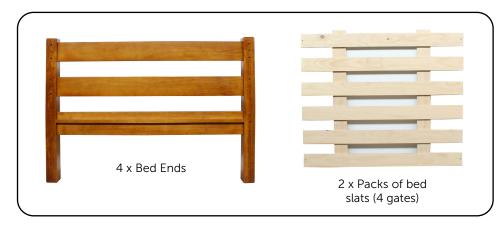





WARNING:

- Top bunks and elevated beds are not recommended for children under the age of 9.
- The upper bunk must be more than 2 m from any ceiling fan.
- Children should be discouraged from playing on the bunk bed.
- The bunk bed should be checked periodically to ensure that the guardrail, ladder and other components are maintained in the correct position and state of repair and that all connectors are tight.

Step 8

Sit the ladder in place (Fig. 1) and insert the 50mm JC bolts through the safety rails into the insert nuts in the ladder. Tighten with the allen key supplied (Fig. 2).





Step 9

Take the 1" screws and fix the brackets on the ladder to the side rails.



Step 10

Finally check that everything is secure and tight, then your bunks will be ready to use!

Step 1

Insert the 9.5mm dowels into the holes in the four bed ends.



Step

Take the two bed ends for the bottom bunk (bed ends with the 16mm hole in top of leg) and two of the side rails.

Fit the side rails onto the dowels on the bed end (Fig.1) and put the cross dowels into the hole on the side rails (Fig. 2). Feed the 100mm JC bolts through the legs and into the cross dowel and tighten with the allen key supplied (Fig. 3). Do the same at the other end.







Step 3

Take one set of slats (two gates) and sit in place (Fig. 1). Screw the four corners of each gate down using the $1\frac{1}{4}$ " screws through the pre-drilled holes (Fig. 2).








Fix the short safety rails at the end you want the ladder and the longer safety rails at the other end (Fig. 2). Ensure the holes for the cross dowels on the safety rails are facing in when assembling (Fig. 1).





Step 4

Take the two bed ends for the top bunk, the remaining two side rails and the two longest safety rails.

Decide which side of the bunk you want the ladder placed. Fix the safety rails on the opposite side, at the same time fixing the side rails to the two bed ends. Use the same method as in Step 2.



Step 6

Take the remaining two slat gates, fit into place and screw the corner of each gate into the side rails using the pre-drilled holes.

Step 7

Place the 16mm dowels into the holes on the top of the legs of the bottom bunk. Now, with two people, lift the top bunk into place, ensuring all four corners slot into the 16mm dowels.

