

2021
**COMMERCIAL
AIR SOLUTIONS**

LG AIR SOLUTION



2021

COMMERCIAL AIR SOLUTIONS



Distributed by

A rectangular box with a thin black border, intended for a distributor's name and contact information.

LG Electronics

<http://www.lg.com>
<http://partner.lge.com>

028

OUTDOOR UNITS

MULTI V S	030
MULTI V S	060
MULTI V M	082
MULTI V WATER IV (HEAT PUMP / HEAT RECOVERY)	092



118

INDOOR UNITS

WALL MOUNTED	120
CEILING MOUNTED CASSETTE	134
CEILING MOUNTED ROUND CASSETTE	152
CEILING CONCEALED DUCT	156
FRESH AIR INTAKE	172
CEILING & FLOOR CONVERTIBLE CEILING SUSPENDED	174
CONSOLE & FLOOR STANDING	180
COMPATIBILITY & FEATURE FUNCTIONS	188



192

HOT WATER SOLUTION

HYDRO HT	194
----------	-----



202

VENTILATION SOLUTIONS

ERV	204
ERV WITH DX COIL	212

214

CHILLER

INVERTER SCROLL CHILLER	218
FCU	230

244

CONTROL SOLUTIONS

INDIVIDUAL CONTROL	250
CENTRALIZED CONTROL	262
INTEGRATION DEVICE	282

318

ACCESSORIES

MECHANICAL ACCESSORIES	320
PIPING ACCESSORIES	328

NEW INNOVATION FOR 2021



**Multi V,
Recognized for
its technology
and Innovativeness**

LG Electronics won the Air-Conditioning, Heating and Refrigeration Institute (AHRI) Performance Award for three straight years (2017-2019)
 *Passed AHRI performance evaluations for 73 models in 7 main product groups, including
 *Integrated A/C *Large-capacity System A/C *Mid- to Small-capacity System A/C

**Air Cleaning Function
for the post-COVID era**

LG System Air Conditioners provide air purification suited for COVID-19 era, and even global brands like Starbucks choose it for their needs. 4-Steps Air Purifying Process Removes Invisibility



Eco-conscious refrigerant with the future in mind

New line-up applying the industry-first mini VRF with R32 refrigerant to MULTI V S.

- Air cooled VRF Heat pump
- 12.1 - 15.5kW (Cooling capacity based)
- Both 1Ø, 220 - 240V, 50Hz and 3Ø, 380 - 415V, 50Hz
- Side discharge outdoor unit



LG participates in the ECP programme for EUROVENT VRF Program. Check ongoing validity of certification www.eurovent-certification.com

New Innovation Novel Design



ADVANTAGE OF **MULTI V**



DUAL SENSING CONTROL


ULTIMATE EFFICIENCY

Ultimate Energy Saving with Dual Sensing Control



Humidity + Temperature

Ultimate Efficiency

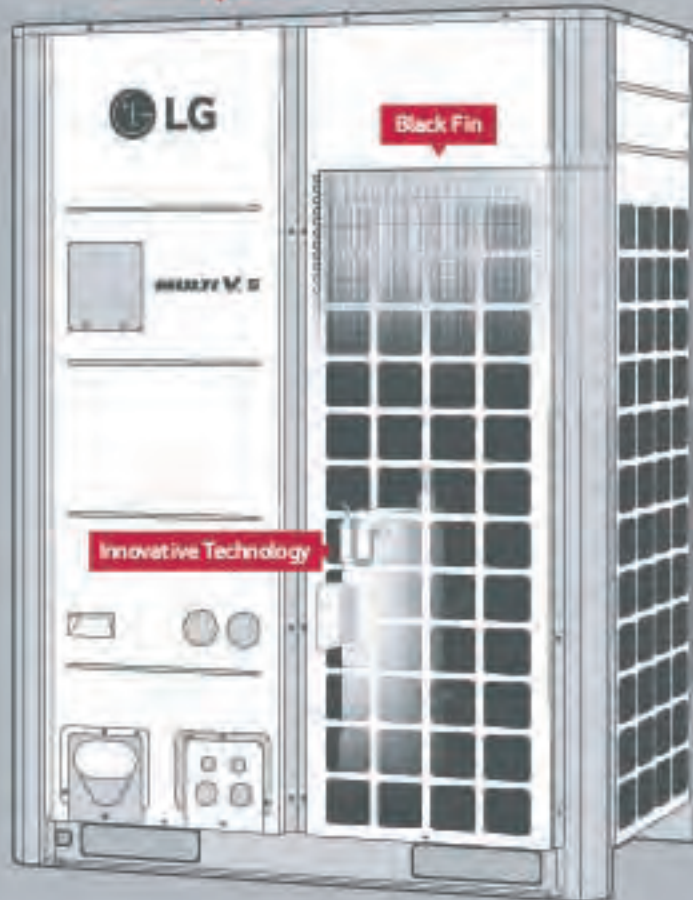

Innovative Technology

SUPERIOR DURABILITY

LG's exclusive "Black Fin" heat exchanger is designed to perform even in corrosive environments.


Certified protection

• Verification of corrosion resistance performance
 - Conducted by TÜV Rheinland
 - Test Method D of ISO 15525:2017
 - Test condition: Salt contaminated condition - 5 years (9210 h) at 40°C
 - Result: no corrosion (DIN EN ISO 15525:2017)



DESIGN FLEXIBILITY

Flexible installation with Large Capacity Outdoor Unit. MULTI V S enables easy type change-over to suit the purpose of any building. MULTI V S allows versatile design with flexible piping locations.



Black Fin



Gebze, Turkey

Riyadh, Saudi Arabia

Noida, India

Changwon & Pyeongtaek, Korea

Tianjin, China

Dingbo, China

Haiphong, Vietnam

Pune, India

Royong, Thailand

BRAND RELIABILITY

Global production sites facilitate world-class customer service.



R32 APPLICATION

New line-up applying the industry-first mini VRF with R32 refrigerant to MULTI V S.

DIVERSE PRODUCT LINE UP

Integrated solution optimized for various business environments, including hot water, AHU, BMS, and EMS.

SMART CONTROLS

MULTI V responds to diverse building environments with LG ThinQ-based AI control and individual / central integrated control solutions.




R1 Compressor™

INNOVATIVE TECHNOLOGIES

Ultimate Inverter Compressor
 - MULTI V S
 Revolutionary Scroll R1 Compressor
 - MULTI V S R32, MULTI V M

MULTI V BRAND HISTORY

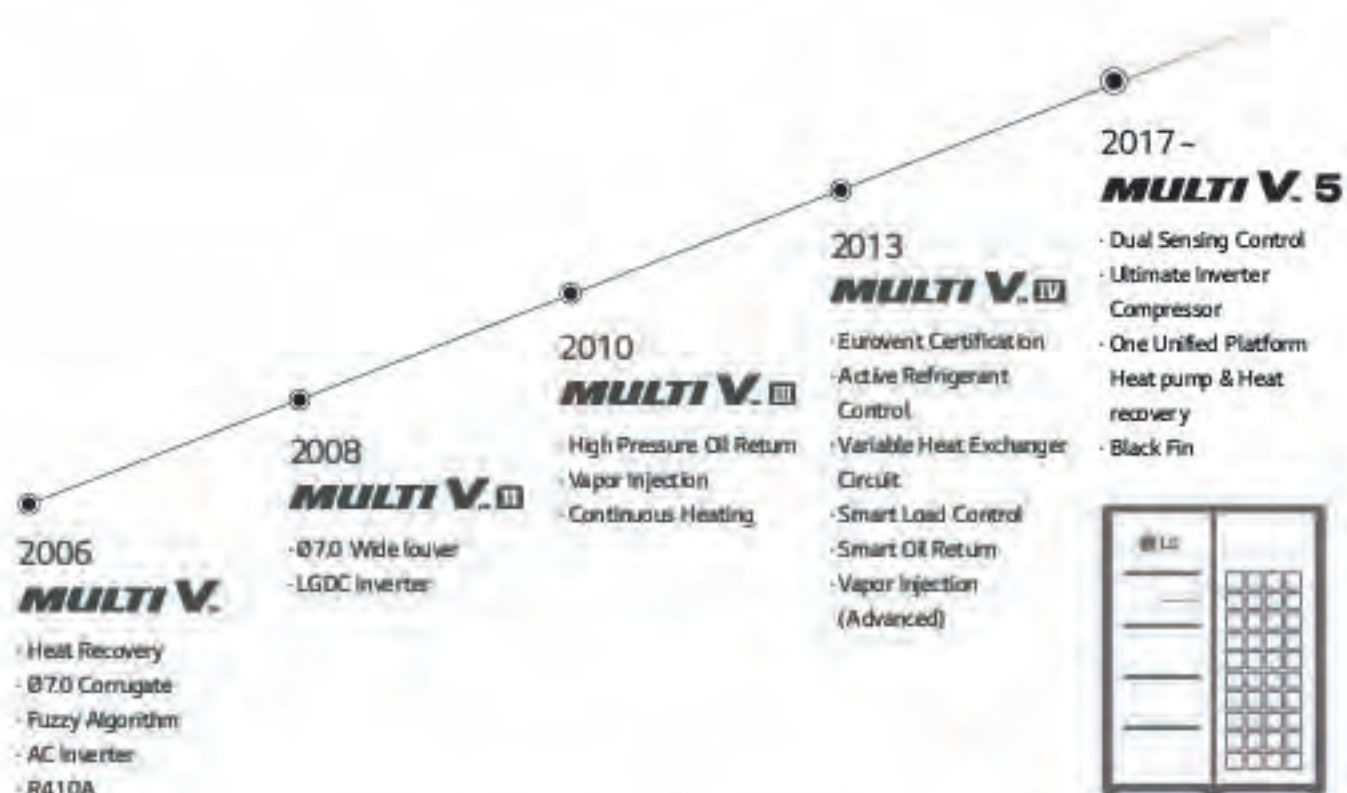

Since the time when LG launched Korea's first residential air conditioner in 1968, the company has worked to continuously enhance its technological innovation and reliability. As a result of sustained improvement, LG VRF launched the first generation of MULTI V in 2006 and achieved significant development. With the best-in-class compressor technology and innovation applied to every part and control solution, MULTI V has evolved to be one of the world's most efficient and reliable VRF solutions.

The first and second generations of MULTI V boasted inverter technology and non-ozone depleting technology, while MULTI V III was produced with cutting edge tech like oil return with HIPOR™ and double compression features with mid-pressure refrigerant allowed by Vapor Injection. The innovative technologies of MULTI V's fourth generation brought about product leadership in efficiency. Its smart load control adjusts with the outdoor temperature, while optimizing refrigeration management and heat exchange for both cooling and heating.

MULTI V's wide range of VRF solutions satisfies various building types and sizes. MULTI V S's size discharge was designed for small to mid-sized buildings while MULTI V Water is a water-cooled VRF solution with variable water flow control technology.

In 2017, the ultimate VRF solution was introduced with MULTI V 5. This generation has fully improved its technological potential with the powerful and reliable yet economical Ultimate Inverter Compressor, effective corrosion resistance with the Black Fin coating and enlarged fans. Dual Sensing Control offers the most pleasant indoor environment while minimizing unnecessary energy loss by sensing both temperature and humidity to efficiently manage cooling, heating and part load.

MULTI V 5 has been designed for the ultimate efficiency, performance, flexibility, comfort and control, ensuring the most pleasant indoor experience.

INFRASTRUCTURE IN EUROPE



LG Air Conditioning Academy

LG has set up 20 official air conditioning academies in Europe, teaching much needed skills to thousands of current industry professionals including installers, consultants, designers, sales staff and service technicians. The academy program is being used to share expertise and educate these HVAC experts by providing a cutting-edge technical experience with the newest and most advanced technologies and equipment. Moreover, as LG's entire product range is installed on site, professionals can be trained in a realistic way that offers them the chance to experience the latest products first-hand.



European Air Conditioning Distribution Center

LG's European Air Conditioning Distribution Center is located in Oosterhout, the Netherlands. Supplying and delivering products all over Europe, this distribution hub has contributed to smooth and rapid delivery, direct shipping for smaller orders and delivery tailored to air conditioners. The hub tries to manage inventory efficiency by taking advantage of LG EU's established inventory pool.

- Air Conditioning Academy
- Europe Energy Lab
- European Distribution Center



ENGINEERING TOOLS & SUPPORT

From planning to service & maintenance and then to de-construction, an architectural project goes through many stages from the beginning to the end of its lifecycle. Along those stages, various engineering tools are applied to solve the diverse issues happening in each stage, with the most optimal solution possible. Given the usage of such tools, buildings are effectively designed, built, supervised, and maintained throughout their lifecycle.

Dedicated to provide the best HVAC engineering support, LG Electronics Air Solution Business Unit offers several engineering tools and solutions focused on HVAC, during the overall lifecycle of a building, related to the three categories. Among them, the LATS* Program series has been developed to offer the best tool for LG HVAC systems, providing our customers with a solution that allows for faster, easier and more accurate model selection, draft, energy estimations and more.

*LATS (LG Airconditioner Terminal Solution)



I

Energy Estimation & Energy Modeling




II

Model Selection & Design



III

Installation Environment Simulation

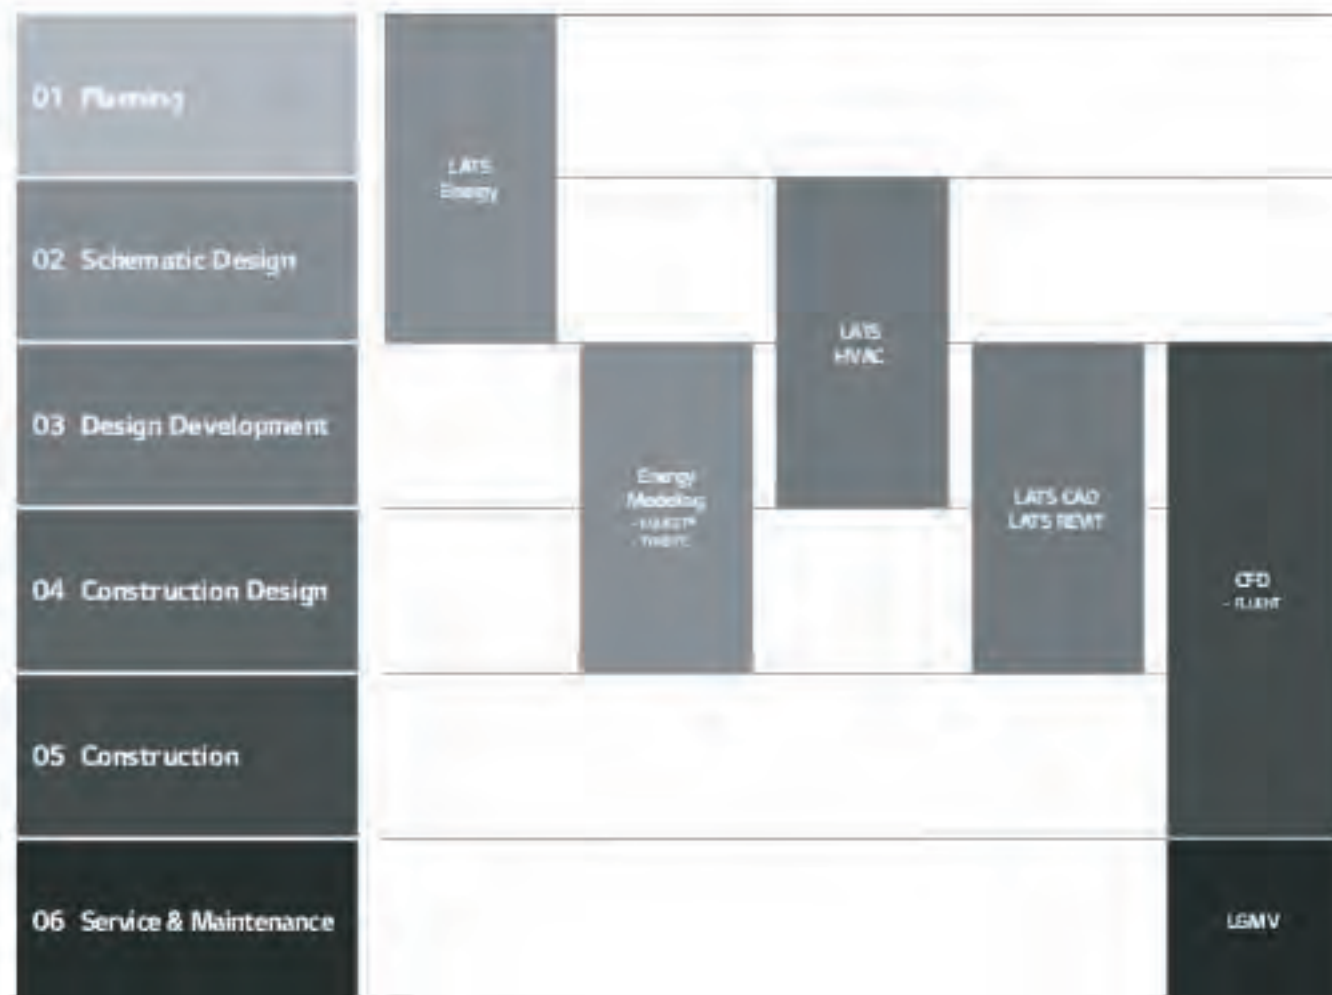

01 Draft Energy Estimation

LATS Energy

LATS Energy is a program developed by LG to estimate energy consumption and analyze the life cycle cost of LG commercial air conditioning systems during a project's early stages.



02 Building Energy Modeling

eQuest, EnergyPro, Trace700 and More

These are certified commercial programs which assess the HVAC system efficiency and building's annual energy savings for building standards or certifications, like LEED. LG HQ supports these programs for the project stages of Design Development and Construction Design wherein the overall designing is finished.



03 Model Selection

LATS HVAC

LATS HVAC is a model selection program that accurately and quickly selects the most suitable LG commercial air conditioning systems for each design. In addition to model selection, faster estimation on refrigerant piping diameter and additional refrigerant is possible, along with auto printing of reports.



04 Design

LATS CAD

LATS CAD enables faster and more accurate 2D design of LG commercial air conditioning systems. It also enables modules for quotation and installation review that minimize inherent problems during installation and commissioning. (AutoCAD program is required.)



LATS REVIT

LATS REVIT allows BIM users to have an attractive 3D design of LG commercial air conditioning systems with embedded calculations for refrigerant and efficiency features. (AutoCAD Revit program is required.)



05 Environment Simulation

CFD Analysis

CFD Analysis is applied in areas of estimating indoor airflow and temperature distribution while operating VRF products, outdoor airflow distribution, and noise level. By running a simulation before construction, engineers estimate possible issues and find optimal solutions for malfunctions that could occur after construction.



06 Service & Maintenance

LGMV

LGMV offers real-time MULTI V cycle monitoring. During start-up, LGMV can check for normal operation as well as troubleshoot any errors. Also it helps to find causes of errors and solve the problem faster.



BENEFITS OF LG MULTI V

Benefits for Building Owners



- Efficient Management & Cost Reduction**
- Fault Detection Diagnosis enables easy maintenance
 - Requires no extra manpower for regular maintenance
 - With diverse control systems, maintenance cost is minimized



- Reliability at Every Stage**
- Ultimate Inverter Compressor developed and manufactured in Korea
 - Corrosion resistant Black Fin for harsh conditions operation
 - Smart Oil management (Auto Oil Balancing and Active Oil return) decreases compressor damage



- Customized Comfort and Solution**
- Compatible option between Heat pump and Heat recovery system is possible



Benefits for Developers & Construction Companies



- Green Solutions**
- Optimized for LEED/BREEAM certification
 - Renewable energy solution provided through geothermal application



- Maximizing Space Utilization**
- Large capacity in compact size enhances space utilization



- Smart Building Solutions**
- Seamless integration with current Building Management Systems
 - Wi-Fi control available for anytime, anywhere access (via the LG ThinQ mobile app)
 - Energy management and control according to usage and planning is possible with LG's centralized control solution



Benefits for Consultants



- Versatile Solutions**
- Air-cooled, Water-cooled, Heating, and Air Handling Unit interlocking solutions



- Professional Design Support**
- LATS (LG Air-conditioner Technical Solution) for draft energy estimation, model selection, HVAC design and 3D designing
 - CFD Analysis to ensure suitable solutions and prevent malfunctions
 - Energy simulation offered to find the optimal solution



- Optimized Convenience with HVAC Design**
- Flexible and longer piping length facilitates HVAC designing process
 - Meets any type of customer requirements of diverse environment, design conditions, and building applications



Benefits for End-users



- Cost Saving Operation**
- High efficiency guaranteed throughout product line-up
 - Up to 31% cost savings with MULTI V's Smart Load Control*



- Comfort Cooling & Heating**
- Smart Load Control maximizes indoor comfort level
 - Dual Sensing Control offers pleasant and comfortable cooling and heating environment
 - Duration time of Continuous Heating is 11% longer than previous model**



- Convenient Functions**
- Low-noise operation provides a pleasant environment

* Dual Smart Load Control (ESEER based, below 50% humidity) model ARUM 2600ES
** LG internal test result



APPLICATION SOLUTIONS

Office

Supporting efficiency with flexibility

High Rise Office Building



- MULTIV WATER IV
- DX AHU
- High Static Duct
- PDI**
- Variable water flow control kit

Small to Medium sized Office Building



- MULTI V S / S
- 4 Way CST*
- PDI**

The MULTI V series revitalizes the workspace by providing fresh air at all times. LG's intelligent control solutions add comfort to any space.

Commercial

Maximizing business, minimizing cost

Shopping Mall



- MULTI V S
- DX AHU

Retail



- MULTI V M
- ERV
- Convertible

Quick Service Restaurant (QSR)



- MULTI V M
- ERV
- Hydro Kit
- 4 Way CST

The highly efficient, energy saving MULTI V S and MULTI V M reduces operation costs, and provides comfort that suits any purpose and any space, helping to invest the extra space and expense to your business.

*CST (Class) **PDI (Power Distribution Indicator)

Residential

Creating a comfortable home

Condominium & Apartments



- MULTI V S HR
- Hydro Kit
- 1/2 Way CST
- 3rd party controller RTU gateway

Single Family House & Villa



- MULTI V S
- Thermo V
- ESS* & PV** Solar

Remarkably compact size and high static pressure of MULTI V S enables optimal space solution, providing comfort to every space through individual zone control and hot water solution.

Hospitality

Meeting diverse needs




- MULTI V S
- DX AHU
- Hydro Kit
- Low Static Duct
- Remote control
- Refrigerant leak detector

The diverse applications that can be applied to MULTI V S helps bring just the right solution to a sophisticated hotel business.

*ESS (Energy Storage System) **PV (Photovoltaic)

Hot Water Solution

Water heating costs can be reduced with a heat pump, which provides higher efficiency than a boiler system. The Hydro Kit can be connected to Multi V 5, providing temperatures up to 80C. Energy savings can be maximized with the combination of the Hydro Kit and the Multi V 5 Heat Recovery system.

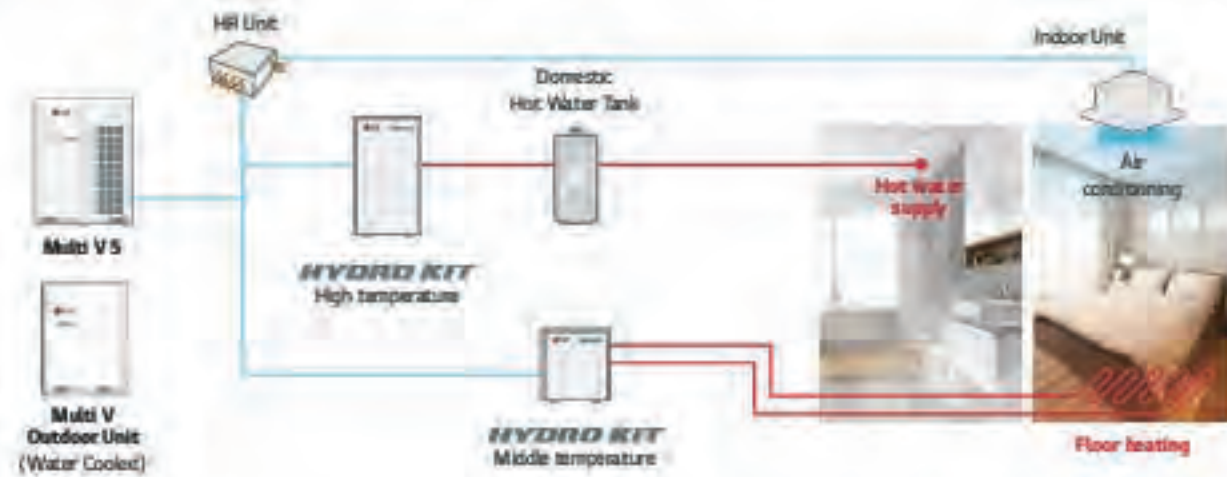


Air Handling Unit (AHU) Solution

AHU is a suitable solution for cooling and heating in large space. With an LG AHU Comm. Kit (for both return air / supply air control) connected to the DX coil of the AHU, LG VRF system can be applied to deliver conditioned air.



Refrigerant Leak Detection Solution

Real-time refrigerant leak detection ensures a safe environment. When refrigerant concentration exceeds 6,000ppm for 5 seconds, the indoor unit will stop operation and alert users with a buzzer or light switch (Dry contact option).

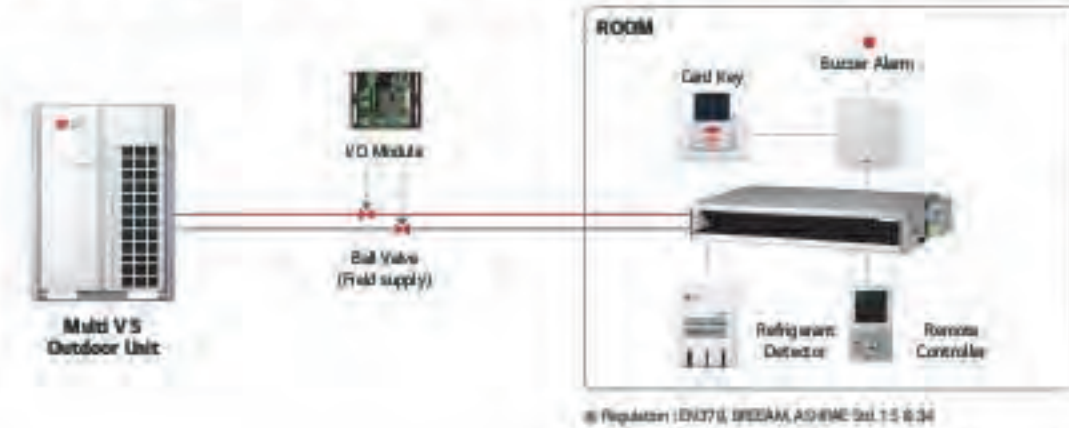

Power Consumption Distribution Solution

In case of shared power consumption in a building, a solution to distribute the power consumption amount per tenant might be necessary. Electricity charges can be billed to each tenant by using output from the LG Power Distributor Indicator (PDI). An administrator is able to check the power usage for each space and date as needed. If the PDI is used in conjunction with an LG central controller, the results can be exported to Excel.



Total Control of Any Device

In order to manage multiple spaces and multiple buildings, the administrator should be able to control systems from wherever they are. The LG central controller can be controlled from any web browser that supports HTML5. Now through the implementation of HTML5, the interface will look great and perform well on any device.



Energy Management Solution

Since HVAC systems use a significant portion of any building's total amount of energy, the energy saving functions of a controller can make a big difference. The energy navigation function enables you to set target values for energy consumption over a certain period of time. In addition, to achieve that value, the administrator can set the energy saving logic in 7 steps and predict the expected usage relative to the target value. Active self-management enables energy savings throughout the building.



Interlocking Solution by Using ACU Module

It is costly to introduce a BMS system to control multiple devices or systems in a small building. With the ACU module, various IO contact points (DI, DO, UI, AO) can be interlocked and integrated, while control is possible from the LG central controller. This enables an efficient management of lighting, pumps and other devices in the building in conjunction with the HVAC system.



Integration Solution with BMS

There are many BMS protocols used for the control of buildings' various systems such as HVAC, lighting, power and security. LG has a wide range of gateway products for different protocols such as BACnet, Modbus, and LonWorks. In addition, LG gateways include Stand-alone central control capability to act as a back-up controller of the BMS if needed.



Interlocking Solution Using Dry Contact

3rd party thermostats can be used to control LG air conditioners in a room by using a multi point dry contact. The dry contact enables basic control of air conditioners as well as making it possible to report the status and any errors impacting the indoor unit. The Standard III remote control has a DO port. With this DO port, it is possible to interlock the indoor unit with 3rd party devices such as lighting, a fan, or a radiator, based on things like operation mode or current temperature. The indoor unit can be interlocked with various types of input such as card key-tag, door sensor, human detection sensor etc. so that the air conditioner is automatically operated. In addition, the dry contact option settings enable operation of air conditioner to maintain proper temperature when the occupant is absent. This solution makes sure that the room does not overheat or become too cold when unoccupied so that energy cost can be saved.



OUTDOOR UNITS LINE-UP

MULTI V. 5






<p>8-12 HP 380V, 3Ø</p> 	<p>14-26 HP 380V, 3Ø</p> 
<p>22-48 HP 380V, 3Ø</p> 	<p>50-72 HP 380V, 3Ø</p> 
<p>74-96 HP 380V, 3Ø</p> 	

MULTI V. 07

5 HP
380V, 3Ø



MULTI V. 8

<p>4-5 HP 220V, 1Ø</p> 	<p>4-6 HP 380V, 3Ø / 220V, 1Ø</p> 	<p>8-12 HP 380V, 3Ø</p> 
<p>6 HP 220V, 1Ø</p> <p>Heat Recovery</p> 		<p>4-6 HP 220V, 1Ø 380V, 3Ø</p> <p>R32</p> 

MULTI V. WATER ID

<p>8-10, 14, 20 HP 380V, 3Ø</p> 	<p>16-18, 22-24, 28-30, 34, 40 HP 380V, 3Ø</p> 
<p>42-44, 48-50, 54, 60 HP 380V, 3Ø</p> 	<p>62-64, 68-70, 74, 80 HP 380V, 3Ø</p> 


Individual Control		Centralized Control				
Wired Remote Controller		Wireless Remote Controller	Display	Platform	Gateway	
Standard	Simple					
Standard II (White)		PMSSE21H (Heat Pump) PMSSE21C (Cooling Only)	AC Ez	ACP 5	ACP LonWorks	
						
Standard III (Black)			Wi-Fi Modem	AC Ez Touch	AC Manager 5	Modbus RTU gateway
						
Standard II (White)			AC Smart 5	PI885		
						
Standard II (Black)					 For Outdoor Unit (SINGLE/MULTI/THERM V) PMPF14A	
Premium						
						

Centralized Control	Integration Device			
Facility Integrator	Indoor Unit		Outdoor Unit	AHU Kit
	Dry Contact	Control Accessory		
PDI (Power Distribution Indicator)  Premium (8 ports) PQNU01S-40 Standard (2 ports) PPWR0B-000	 Simple Dry Contact PORYC000	Group Control Wire  PZCW0G3	IO Module (Input / Output Module)  For MULTI V V/S PMSM000	Communication Kit  Return / Room Air Control PACHM000
ACSIO Module (Input / Output Module)  PEIPM000	 Dry Contact for Thermostat (For using universal input) PORYC020	Remote Temperature Sensor  PORSDB	Variable Water Flow Control Kit  For MULTI V WATER V PACHM000	 Discharge / Supply Air Control PACHM000
Chiller Optise Kit  PCHL000	 2 Pairs Dry Contact (For Setback) PORYC040	Zone Controller  4 Zones by thermostat ASCA	Low Ambient Kit  For MULTI V V/S PWC2	Controller Module  Main Module PACHM000
ACU IO Module I/O  PEIPM000	 For Modbus PORYC030	Independent Power Module  PWP0	Cool / Heat Selector  PRCBM	Communication Module  PACHM000
UD  PEIPM010				Control Kit  PACHM000 (Max. 3 Outdoor Units)
UR  PEIPM010				Water Communication Module  PACHM000
EEV Kit (Electronic Expansion Valve)				
 RLK08A0 (-28 kW) RLK09A0 (-36 kW)		 RLK09A0 (-36 kW)	 RLK09A0 (-36 kW)	

028-117

OUTDOOR UNITS

MULTI V 5 / MULTI V S / MULTI V M / MULTI V WATER IV (HEAT PUMP / HEAT RECOVERY)

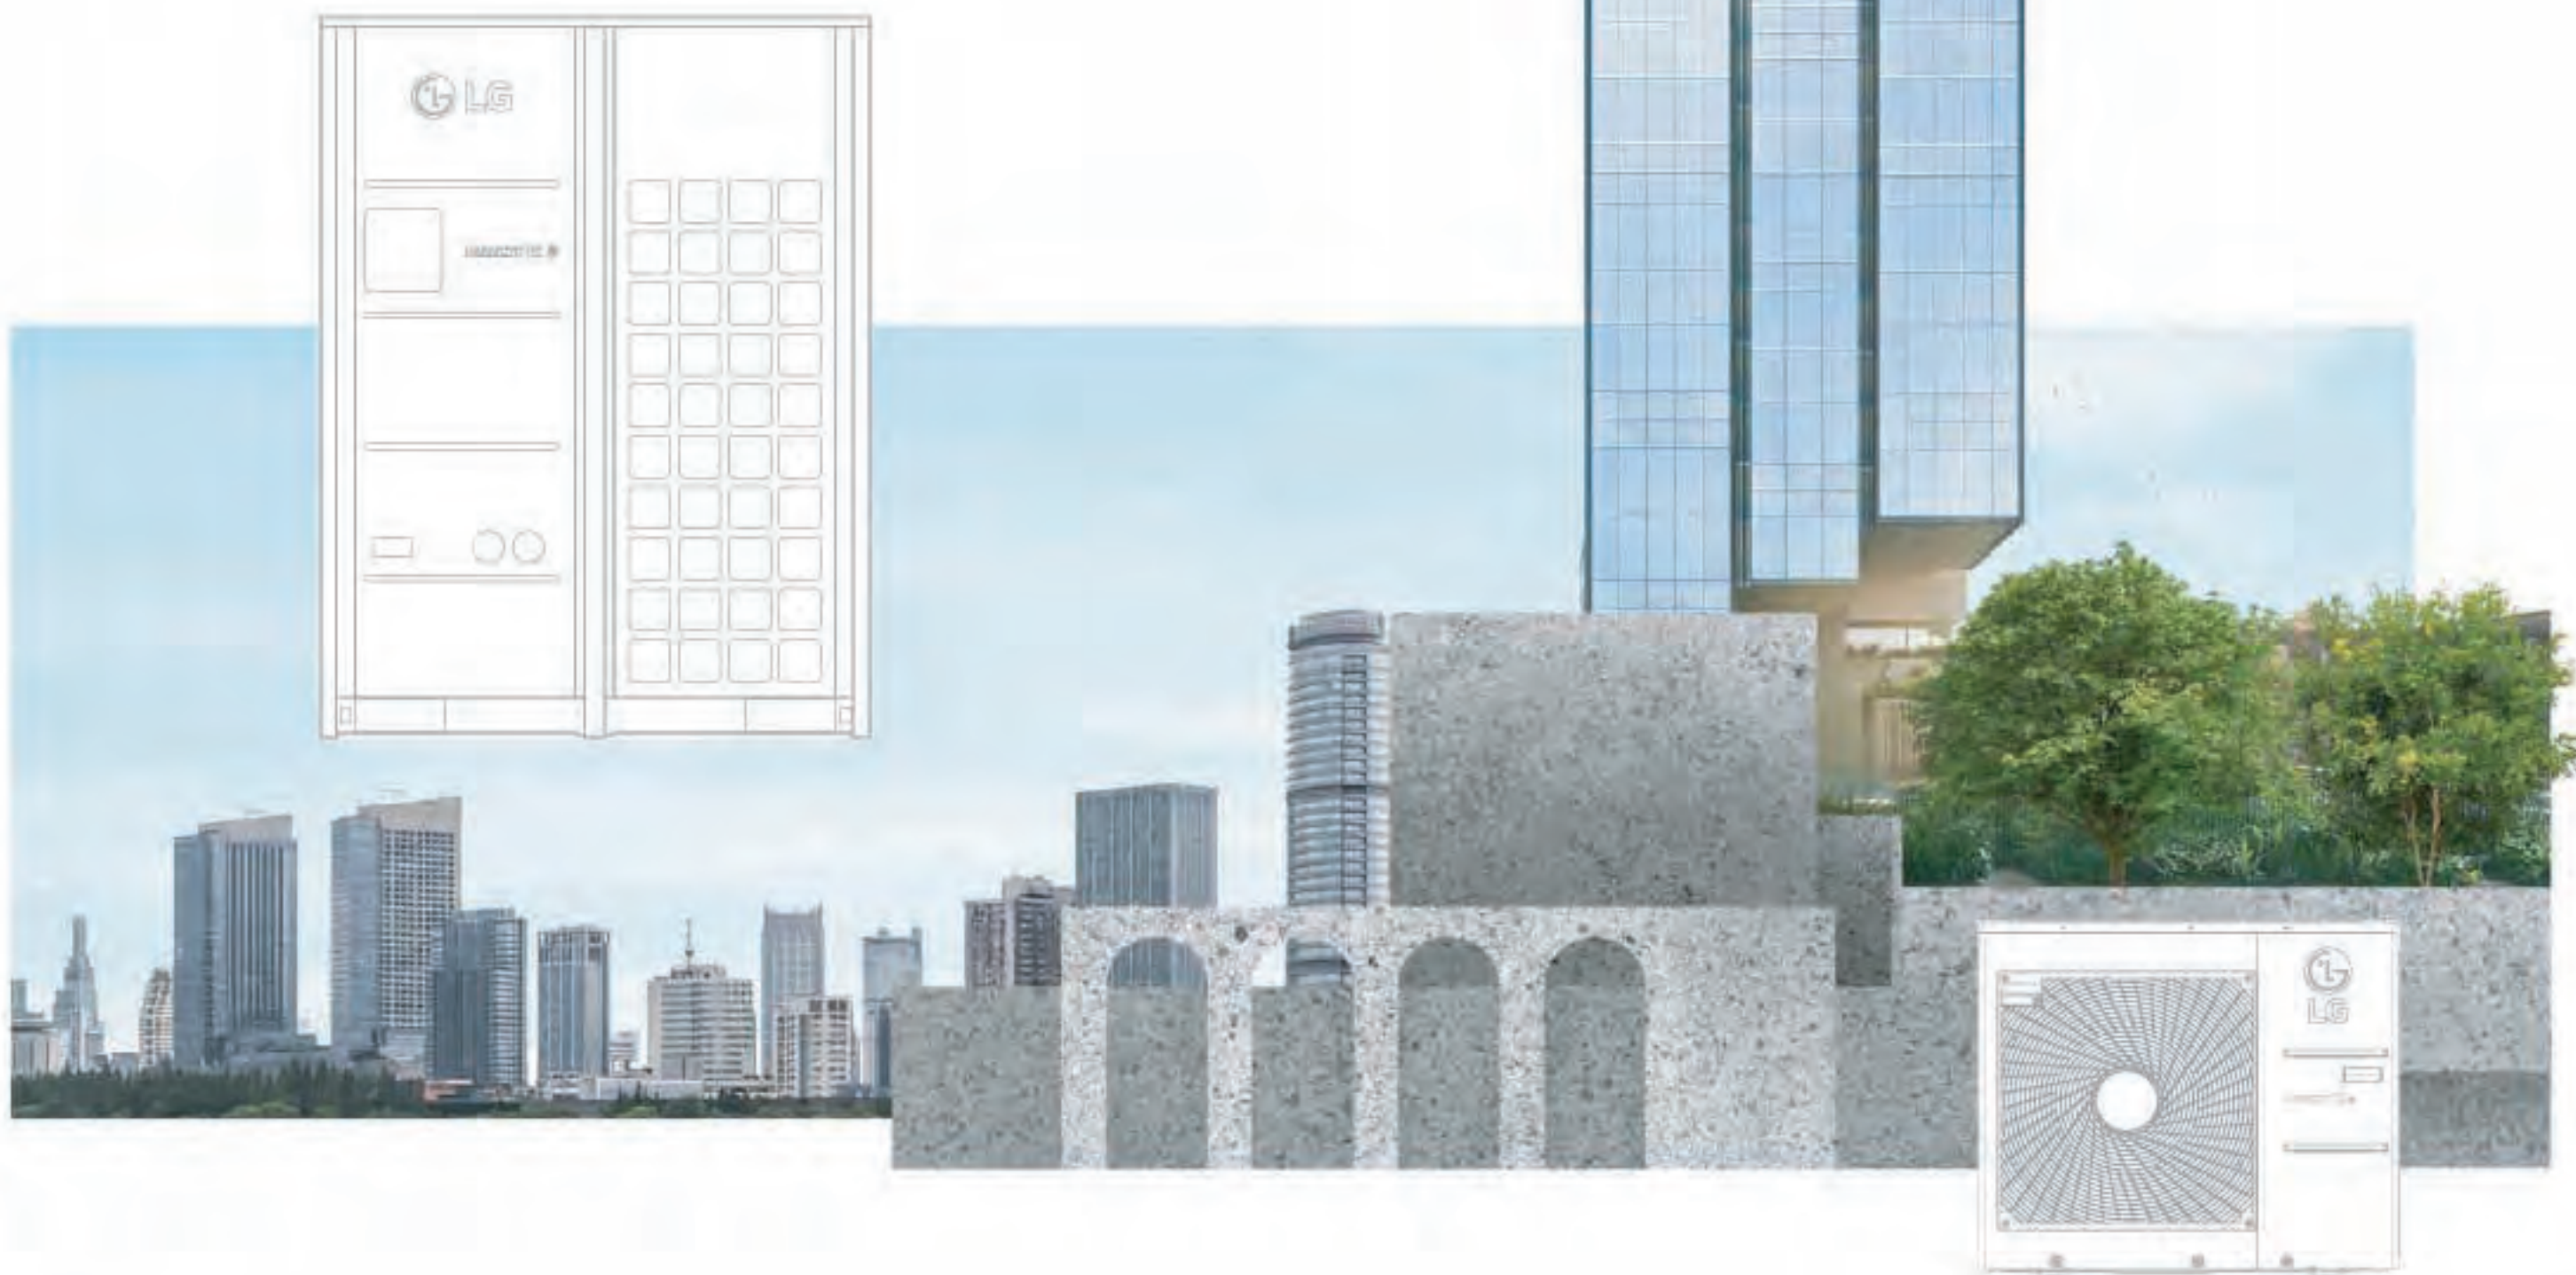

MULTI V™ 5

Highlight

- Air cooled VRF Heat Pump & Heat Recovery
- 22.4kW - 268.8kW (Cooling capacity based)
- 3Ø, 380 - 415V, 50Hz
- Top discharge outdoor unit
- Ability to function as Heat Pump or Heat Recovery



Energy saving



Reliability




Low noise



Long life

How does it work?

Dual Sensing



Partial Defrost



Interchangeable between heat pump and heat recovery



Dual Sensing Smart Load Control (SLC)

Enhanced energy saving & increased indoor comfort

Smart Load Control responds to:

- 1) Outdoor ambient dry bulb temperature
- 2) Outdoor ambient relative humidity (when enabled)

Cooling Indoor Units
adjusts target low pressure
Raises the target low pressure value as cooling load falls and/or ambient temperature falls. Lowers the target low pressure value according to cooling load (rise and/or ambient temperature rise).

Heating Indoor Units
adjusts target high pressure
Lowers the target high pressure as heating load falls and/or ambient temperature rises. Raises the target high pressure as heating load rises and/or ambient temperature falls.

What are the benefits?

Enhanced energy savings:

Cooling Mode
By raising the target low pressure during off-peak cooling operation.

Heating Mode
By lowering the target high pressure during off-peak heating operation.


Increased indoor comfort

Operation under the revised weather conditions before changing conditions (impact) indoor comfort

Cooling load according to temperature change




Cooling load according to humidity change

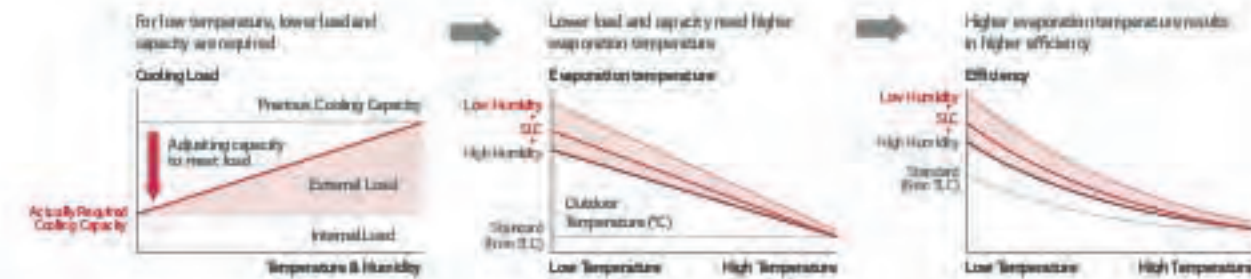

Energy Savings with Dual Sensing Control Temperature & Humidity

Energy Consumption in Cooling Season

Dual sensing SLC control can save 6% more energy compared to SLC. So dual sensing control is more efficient than SLC.

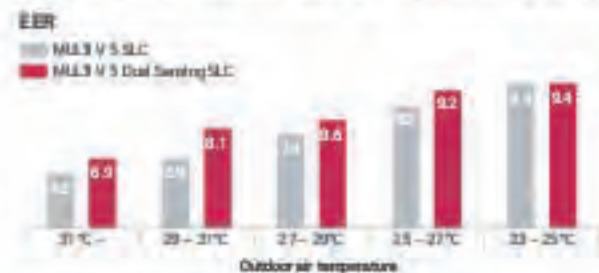

The energy simulation was performed in LG internal based on 1000h model.

Power Consumption in Cooling Season
Yearly Power Input (kWh) - ODU

OAT	MUM (Fwd)	MUM SLC	MUM Dual SLC
31 -	17	15	13
29 - 31	81	73	62
27 - 29	183	136	124
25 - 27	343	170	165
23 - 25	155	110	109
Total	690 (137%)	503 (100%)	474 (94%)

6% more energy saving compared to SLC

Comfort Cooling

Increased indoor comfort & enhanced operating efficiency

MULTI V 5's comfort control algorithm monitors the outdoor air temperature and humidity conditions. When changing weather conditions are deteriorating and there is a high potential the indoor unit's load will remain stable or may increase, comfort cooling delays or abandons raising the target superheat as the room temperature approaches set-point. When changing weather conditions are favorable to raising target superheat, target superheat is moderated.

What are the benefits?

With comfort cooling turned on, the discharged air temperature is controlled. When the IDU controller reduces the fan speed, the potential for cold air falling on occupants located under the cassette IDU or supply air registers is reduced.

Enhanced operating efficiency

Raising superheat reduces refrigerant volume flowing through the coil.



© 2018 LG Electronics. All rights reserved. LG is a registered trademark of LG Electronics.

Preventing cold draft & repeated turn On / Off
Improved Indoor Comfort



Intelligent Defrost


Increased heating run-hours

MULTI V has provided an intelligent defrost algorithm and settings based on current outdoor ambient temperature. With the addition of the outdoor air humidity sensor, MULTI V 5 Intelligent Defrost just got smarter.


What are the benefits?

The Intelligent Defrost algorithm increases the VRF system's heating run-hours and reduces the number of defrost cycles required to maintain optimum heating performance, irrelevant of the mode and method of defrost selected.

Conventional Defrost

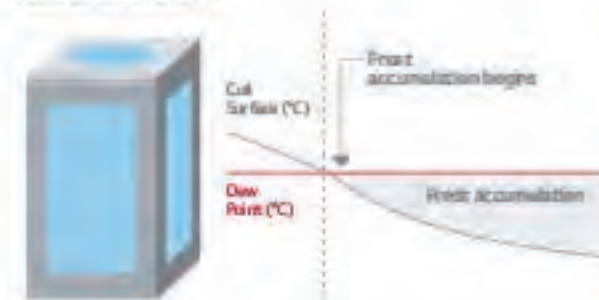

LG Intelligent Defrost / Smart Heating

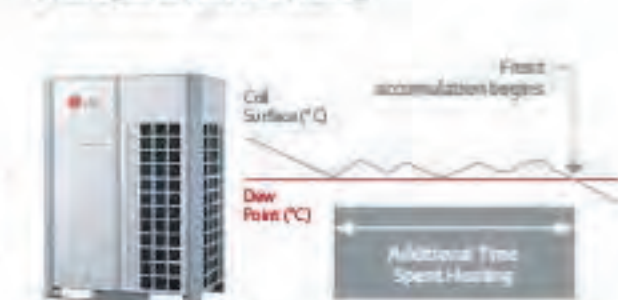

- Increased heating operation time per day (up to 17%)
- LG Internal Fan mode
- Not available (MULTI V3 vs MULTI V 5.2.2.0)
- Outdoor: 21°C indoor: 20/19°C
- Humidity: 50%, Dew Point: -0.5°C


Variable Path Heat Exchanger

Optimized system efficiency & continuous heating

This split coil feature makes it possible for MULTI V 5 to provide continuous heating during defrost. The split coil and valve arrangement also makes it possible for the MULTI V 5 to change the flow path of refrigerant through one of the two coils only, or through both coils in either a series or a parallel arrangement.

What are the benefits?

Optimizes system efficiency regardless of operating modes as ambient weather conditions change. Customizes the used area of the outdoor units heat exchange surface.

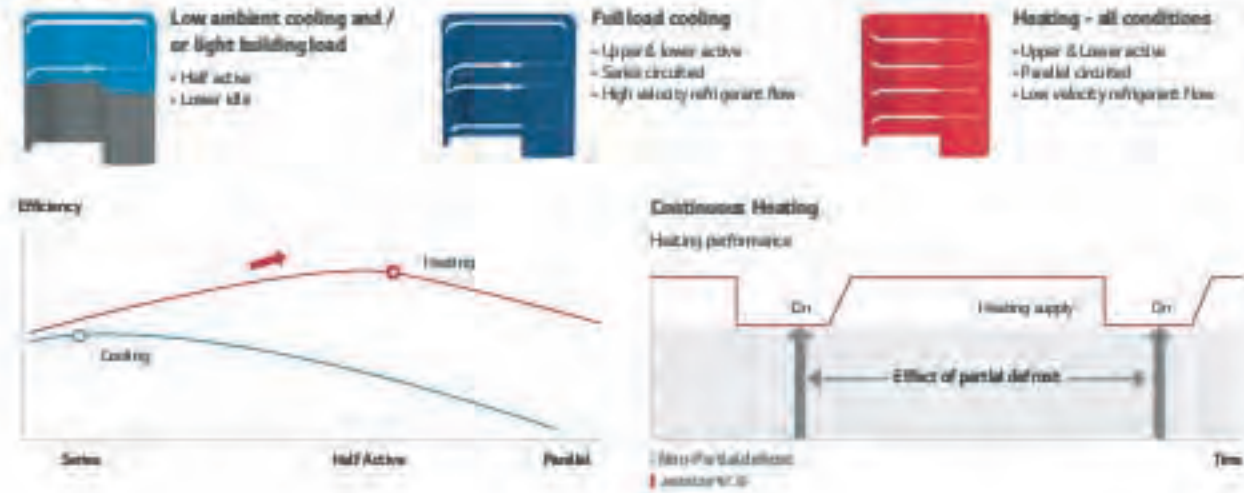


Active Refrigerant Control

Stable operation & sustaining most efficient operation

MULTI V 5 active refrigerant control algorithm goal is to minimize the amount of refrigerant in circulation. The lower the volume in circulation, the lower the cost to move it around the system and the higher the stability of the refrigeration cycle.

What are the benefits?

Widens the ambient temperature range at which stable operation occurs. Sustains most efficient system operation regardless of outdoor weather conditions, operating mode, or building load.

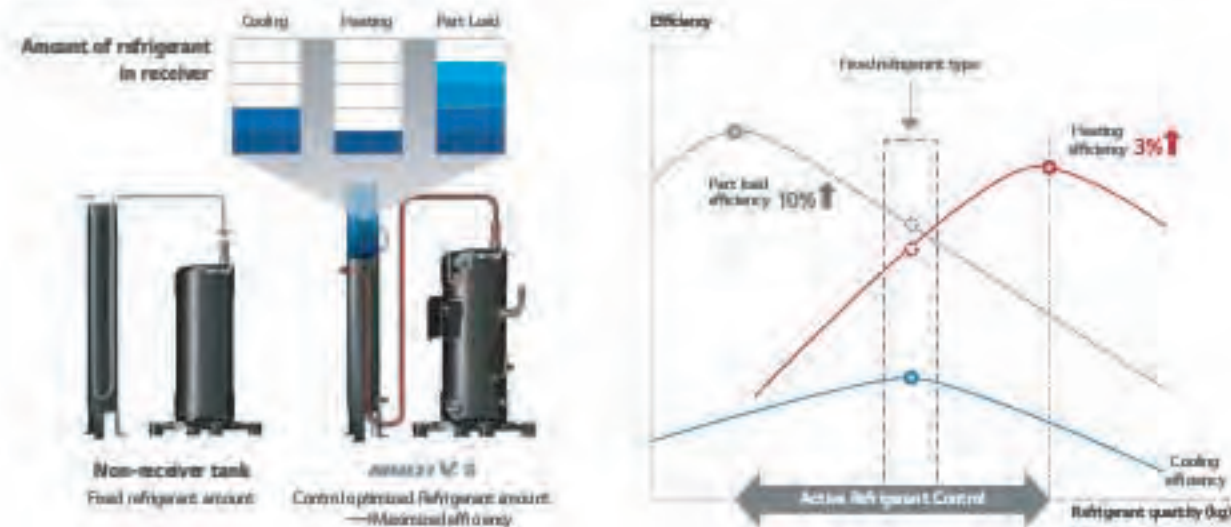

HiPOR™

Advanced compressor reliability & efficiency

HiPOR™ is an LG trademark that stands for High Pressure Oil Return. It consists of an oil separator, oil drain line between the separator and the compressor. HiPOR™ technology enables oil to return directly into the compressor, instead of returning through the refrigerant suction pipe.

What are the benefits?

Maximizes reliability and efficiency of the compressor



Smart Oil Management

Energy saving, enhanced heating & increased compressor

MULTI V 5 performs oil return when needed under normal operating conditions. An oil level sensor is provided in every LG VRF compressor. If the sensor indicates the compressor oil level is low, the main system processor is notified that an oil return cycle is necessary. LG's unique oil level measuring sensor actively monitors the oil level in each compressor.

What are the benefits?

Energy savings: fewer oil return cycles eliminate unnecessary energy consumption, increases system heating run-time during winter operation, increases compressor reliability

Heating performance



Traced oil return logic (Non-oil Sensor)
 ↓ compressor life

Increased heating operation time per day: Up to 12%

LG Internal Test result,
 Test condition:
 - without oil level sensor: every 8 (hour) recovery operation
 - with oil level sensor: 1 (hour) oil recovery operation

Smart Oil Return



Auto Oil Balancing



Sub-cooling & Vapor Injection


Increased heating performance

MULTI V 5 is equipped with advanced sub-cooler and vapor injection control system. The sub-cooler algorithm sub-cools liquid refrigerant just enough so that it can travel to the farthest IDU in the system operating in cooling mode without changing state. In all cases, the vapor injection increases the compressor cycle efficiency and reduces operating cost.

What are the benefits?


Provides stable refrigeration cycle operation over a wide range of outdoor ambient operating conditions. Increases compressor efficiency when compared to systems without vapor injection technology.

Technology Mechanism

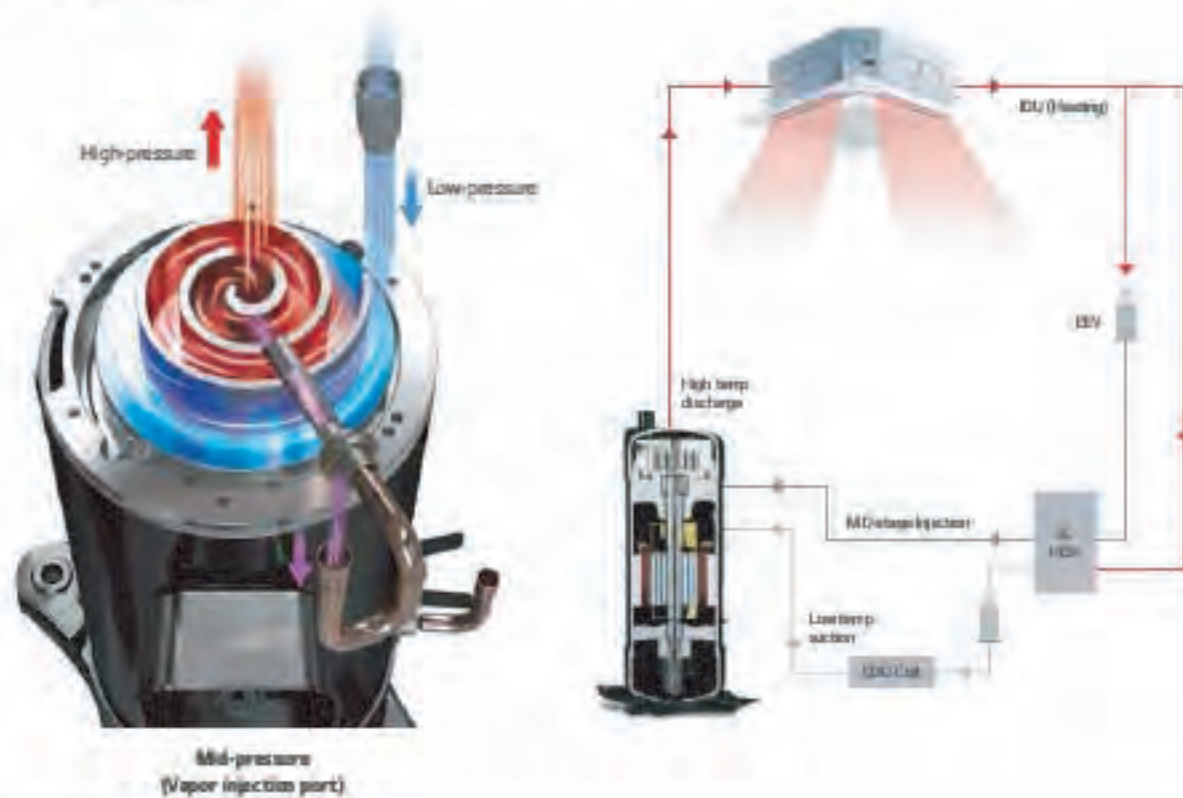

Performance Comparison

Heating performance

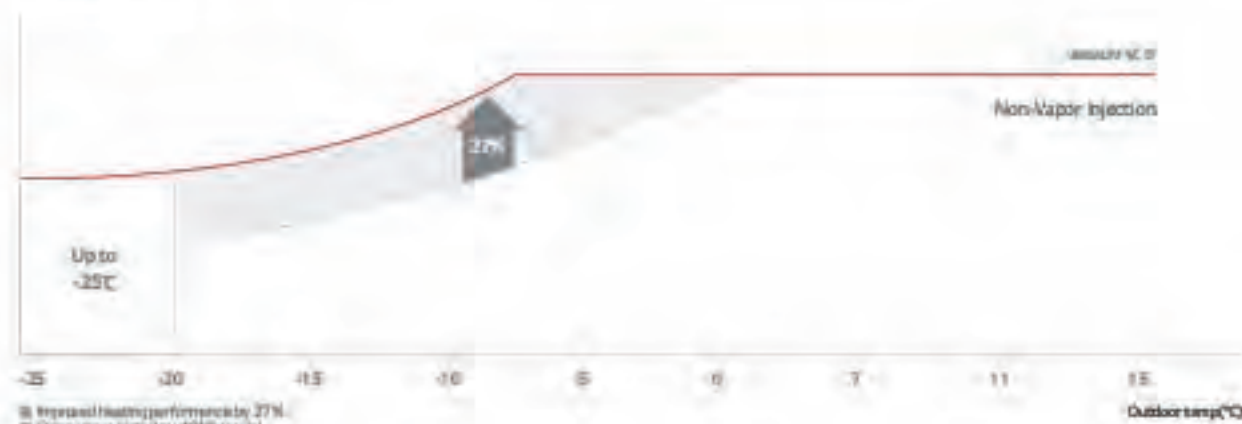

Corrosion Resistance Black Fin

Improved durability

LG Corrosion Resistance solution passed ISO 21207 accelerated corrosion test conducted by an independent test organization and the result has been certified by prestigious global certification organization, TÜV.

What are the benefits?

This improvement in durability prolongs the product's lifespan and lowers both the operational and maintenance costs.

Hydrophilic film (Water flow)
The Hydrophilic coating maintains moisture buildup on the fin.

Acryl + Epoxy + Melamine resin (Corrosion resistant)
Thin Black coating provides strong protection from corrosion.

Aluminum fin

① Verification of corrosion resistance performance
- Declared by TÜV Rheinland
- Test Method: I of ISO 21207
- Test condition: Salt contaminated condition
= severe industrial / traffic environment (F5, F5Q)

SST (Salt Spray Test)

Test Process



① Test process is conducted according to ISO 16527.
② Salt water concentration: NaCl aqueous solution (5%)




CCT (Cyclic Corrosion Test)

Test Process



① Test process is conducted according to ISO 16523.
② Salt water concentration: NaCl aqueous solution (5%)
③ Dry condition change: 60°C, 6hr → 70°C, 2hr
④ Disinfect water



Biomimetic Fan

Maximized performance

The biomimetic technology-based fans, extended shroud of MULTI V 5 allows more high static pressure and helps fans to blow higher air volume for efficient operation. With wider air guide, discharged air current is stabilized and noise level is reduced.

What are the benefits?

Based on the biomimetic technology the fans of MULTI V 5 increased air flow rate by 10% in comparison to previous model and reduced its power consumption up to 20% when compared with the fan blade design on MULTI V N. This eventually results in maximized performance with large capacity.

Honeycomb Whale Design

Clam Shell Pattern

Air flow rate (m³/min)

Previous Model	10%	520
----------------	-----	-----

① Comparison based on 23kW model

Power consumption (W)

Previous Fan Design	20%	1200
---------------------	-----	------

② Comparison based on air volume of 200m³/hr

One Unified Model


Heat pump / Heat recovery with one platform

LG MULTI V 5 satisfies users' various needs with just one platform.


What are the benefits?

MULTI V 5 allows the building previously installed with Heat Pump system to switch to the Heat Recovery system (by adding HR boxes and a third pipe) for changing purpose of the building or remodeling reasons via simple piping construction.

Heat Pump System

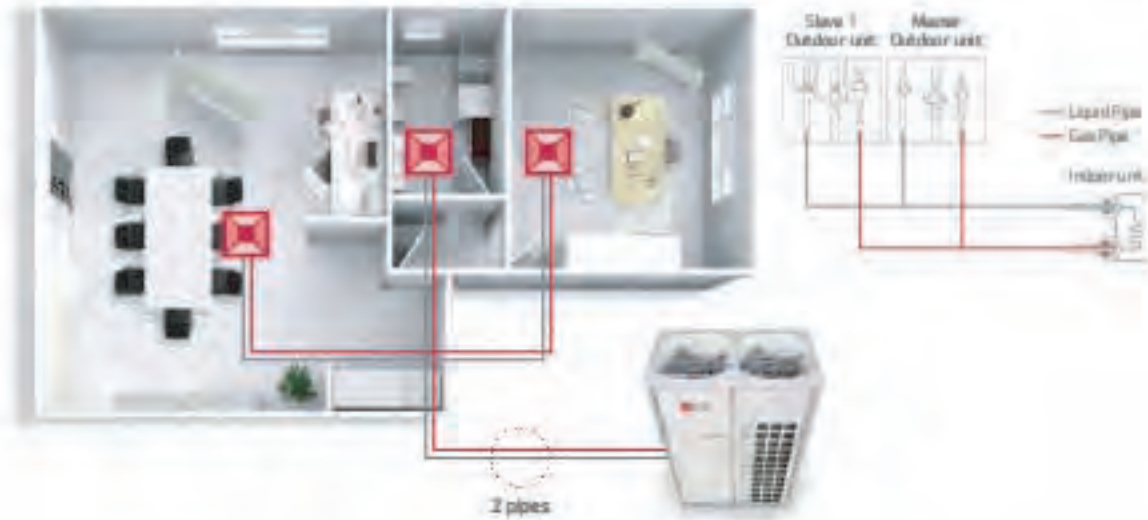


Heat Recovery System

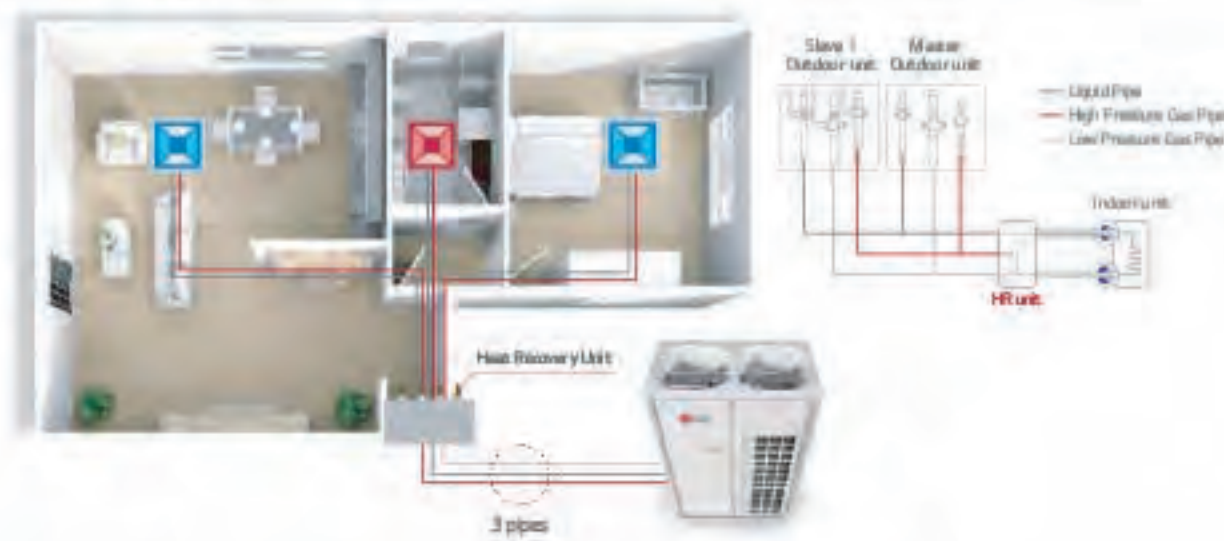

Flexible Installation with Large Capacity Outdoor Units

More flexible design potential & space saving

Large capacity outdoor units of MULTI V 5 minimizes installation space that spares valuable floor space and significantly decreases total installed weight.

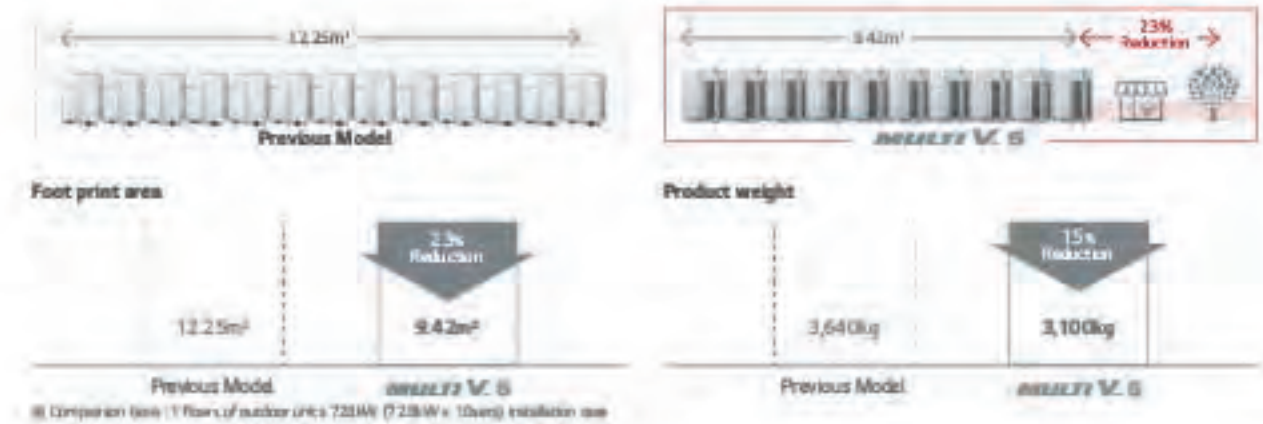

Wider Operation Range


Able to operate at extreme conditions

With improved inverter cooling technology, sub-cooling and vapor injection, MULTI V 5 offers an extended range of heating and cooling operations. Moreover, MULTI V 5's cycle technology with enhanced durability enables optimal cooling performance at high temperature that increases up to 48°C.

Heating



Cooling

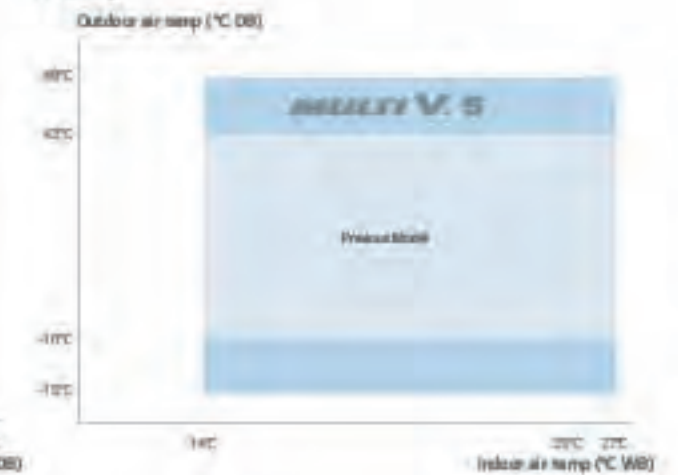


Low-Noise Operation


For noise sensitive environment

The Low-Noise Operation of MULTI V 5 can function regardless of the time at the noise sensitive areas.

Previous Model

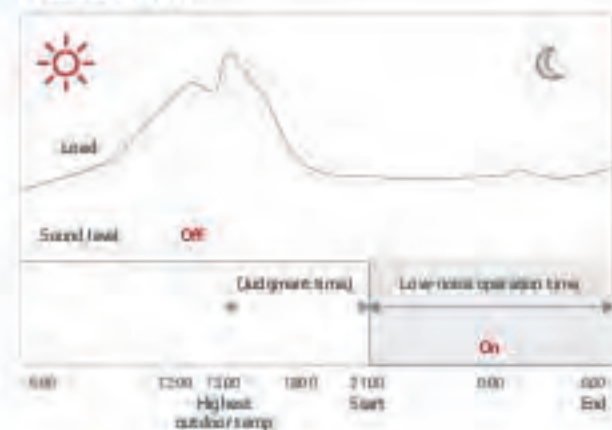

MULTI V 5

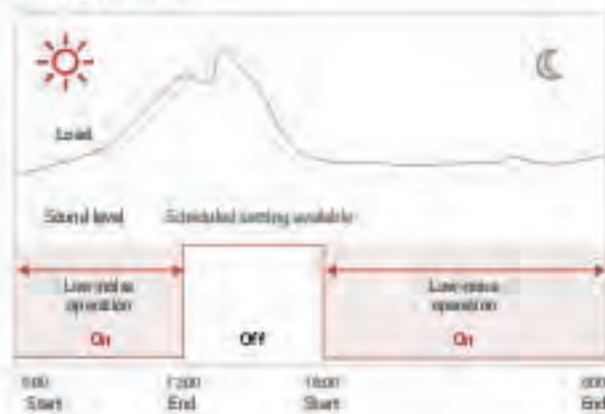

Simple Test Run via LGMV

Increased overall efficiency in installation

With Mobile LGMV of MULTI V 5, fast and accurate auto test run can be executed and the professional installer running the test can receive test results via email, which shortens installation hours and increases overall efficiency in installation processes.

Previous




MULTI V 5



LGMV



Nomenclature

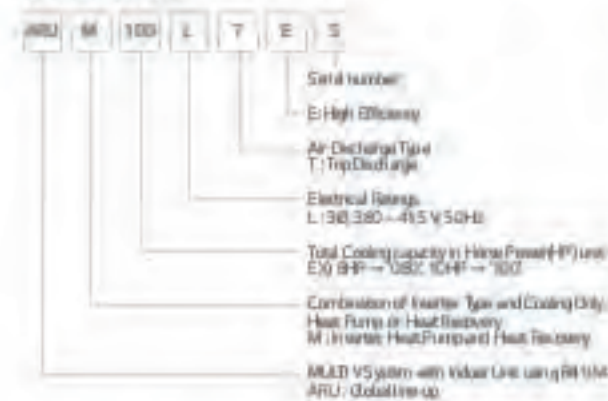

Position of Sound Pressure Level Measuring



- Data is valid at free field condition
- Data is valid at nominal operating condition
- Sound level will vary depending on a range of factors such as the construction (Acoustic absorption coefficient) of particular room in which the equipment is installed
- Sound level can be increased in static pressure mode or used air guide.

Outdoor Units Function


Category	Functions	MULTI V 5
Key Refrigerant Components	Variable Pitch of Outdoor Unit HEX	○
	HFOR™ (High Pressure Oil Return)	○
	Humidity Sensor	○
	Corrosion Resistance Black Fin	○
	Oil Sensor	○
	Dual Sensing	○
	Low Noise Operation	○
	High Static Mode of Outdoor Unit Fan	○
	Partial Defrosting	○
	Auto Dust Removal of Outdoor Unit (Fan reverse rotation)	○
Useful Function	Indoor Cooling Comfort Mode Based Outdoor Temperature	○
	Smart Load Control (SLC) (Changing indoor discharge air temperature according to load)	○
	Outdoor Unit Control Refer to Humidity	○
	Defrost / Delcing	○
	High Pressure Switch	○
	Phase Protection	○
	Restart Delay (3-minutes)	○
	Self Diagnosis	○
	Soft Start	○
	Test Run Function	○
Control Controller	ACEz (Simple Controller)	PQC5225050
	ACEz Touch	PAC72A000
	AC Smart IV	PAC548000
	ACS Smart S	PAC55A000
	ACP (Advanced Control Platform) IV	PA048000
ACP (Advanced Control Platform) S	PACPSA000	
AC Manager S	PA0MSA000	
BNU (Building Network Unit)	ACP LenWorks	PUNWKB000
	ACP BACnet	PQ0FB1700
Installation	Refrigerant Charging Kit	PRAC1
	PDI (Flow Distribution Indicator)	PRWRDB000
Cool / Heat Selector	Premium	PQNUJ1540
	Standard	PR05BM
Low Ambient Kit	PRV2	PRV2
	PRV1	PRV1
Cycle Monitoring Device	IO Module (DDU Dry Contact)	PVDSMN000
	LGMV	PRCT10
	Mobile LGMV	PLGMVW000

Cooling / Heating Operation

Cooling



Heating

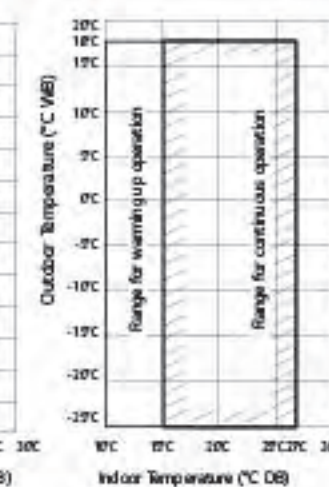


Note


- These figures assume the following operating conditions:
Equivalent piping length: 7.5m
Load difference: 0m
- Range of pull down operation:
If the relative humidity is too high, cooling capacity will be decreased by the variable heat reduction.
- Warming up operation means that the outdoor unit operates to reach the range of continuous operation, however, it may risk operate continuously due to safety or protection logic.

Simultaneous Cooling / Heating Operation

Cooling

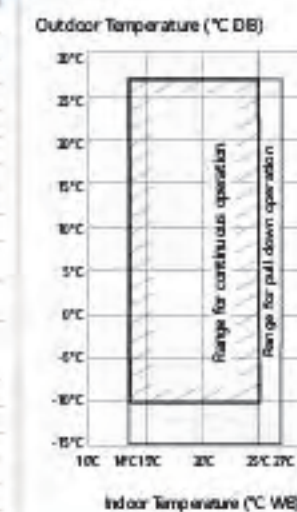

Heating



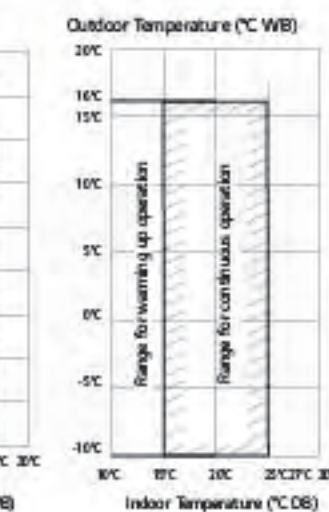


Note

- These figures assume the following operating conditions:
Equivalent piping length: 7.5m
Load difference: 0m
- Range of pull down operation:
If the relative humidity is too high, cooling capacity will be decreased by the variable heat reduction.




ARUM08OLTE5 / ARUM10OLTE5 / ARUM12OLTE5

No.	Part Name	Description
1	Leakage test hole (Side)	Ø22.2
2	Wire routing hole (Bottom)	2-Ø22.2
3	Power cord routing hole (Bottom)	2-Ø50
4	Pipe routing hole (Front)	
5	Pipe routing hole (Bottom)	2-Ø66, Ø53.28
6	Power cord routing hole (Front)	2-Ø45
7	Wire routing hole (Front)	2-Ø30

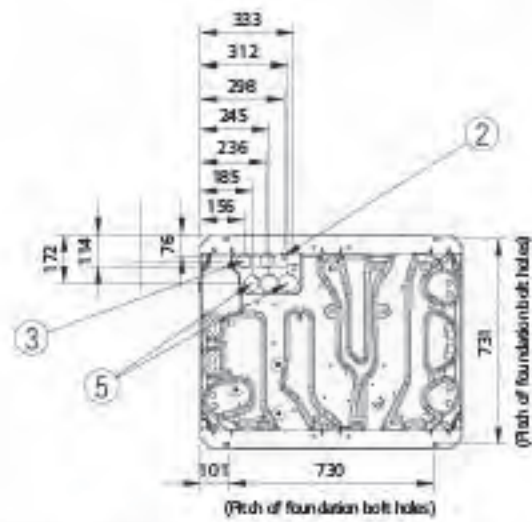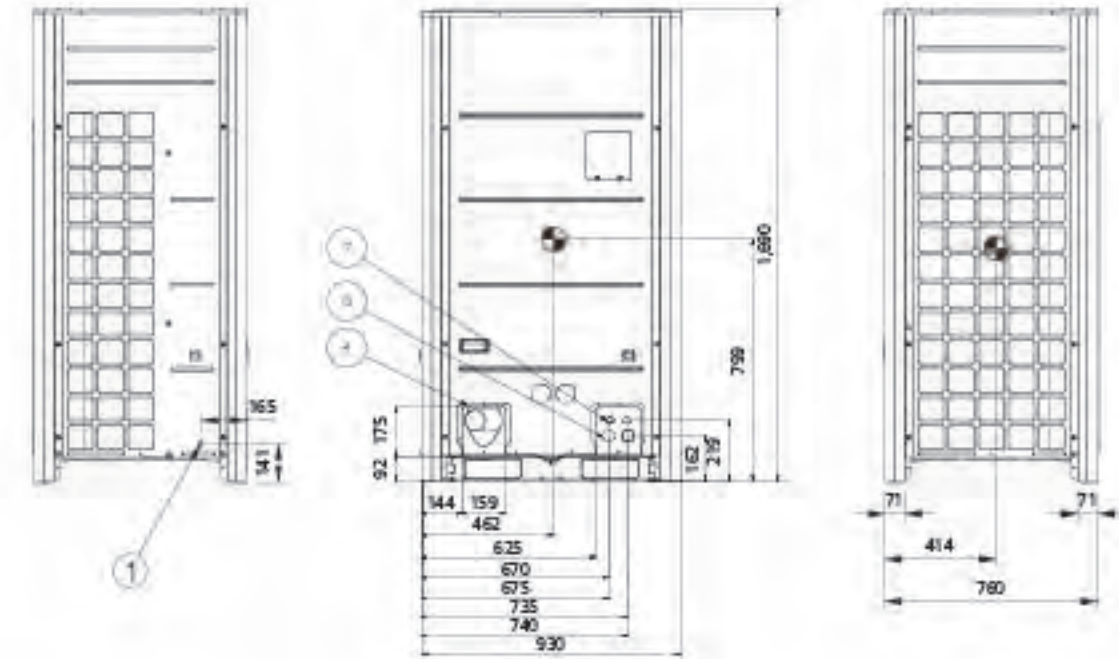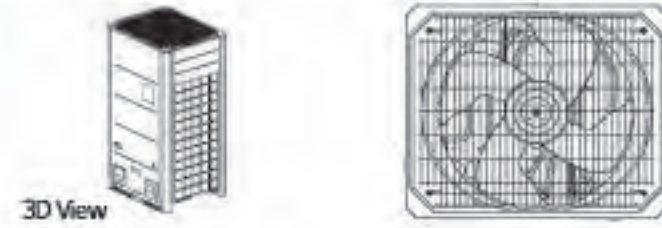

ARUM14OLTE5 / ARUM16OLTE5 / ARUM18OLTE5 / ARUM20OLTE5 / ARUM22OLTE5 / ARUM24OLTE5 / ARUM26OLTE5

No.	Part Name	Description
1	Leakage test hole (Side)	Ø22.2
2	Wire routing hole (Bottom)	2-Ø22.2
3	Power cord routing hole (Bottom)	2-Ø50
4	Pipe routing hole (Front)	
5	Pipe routing hole (Bottom)	2-Ø66, Ø53.28
6	Power cord routing hole (Front)	2-Ø45
7	Wire routing hole (Front)	2-Ø30

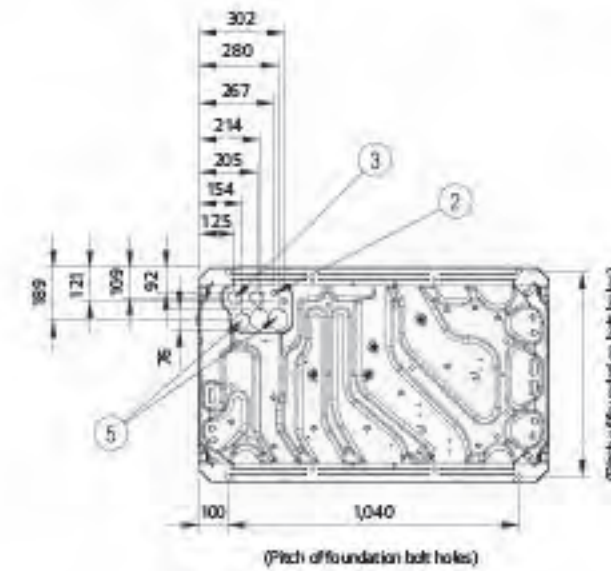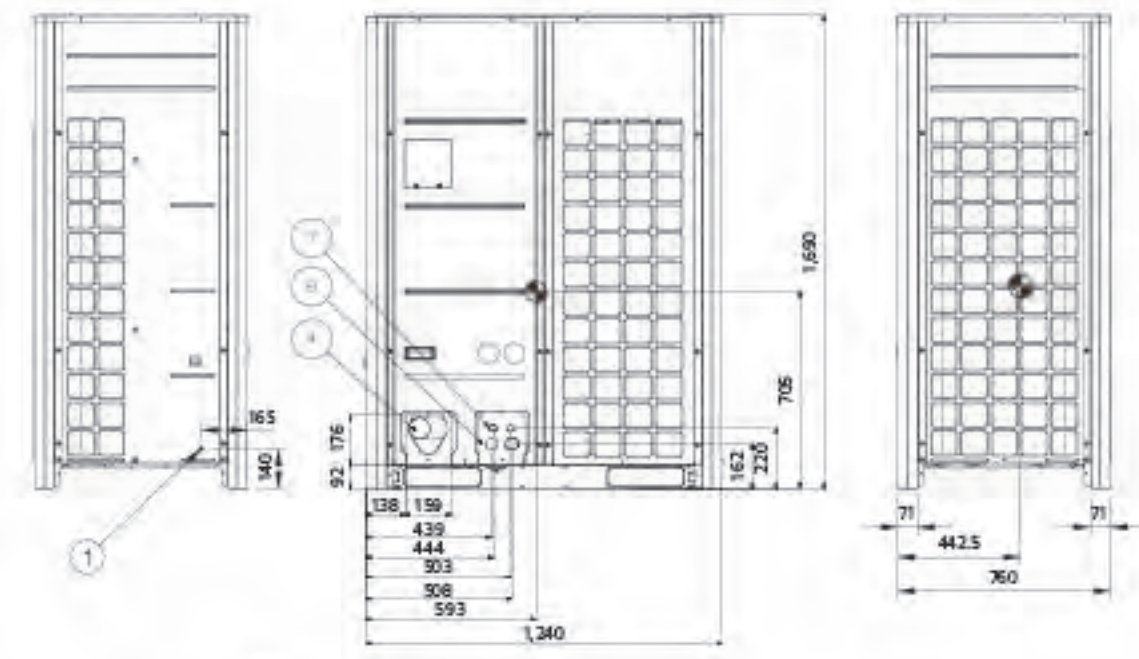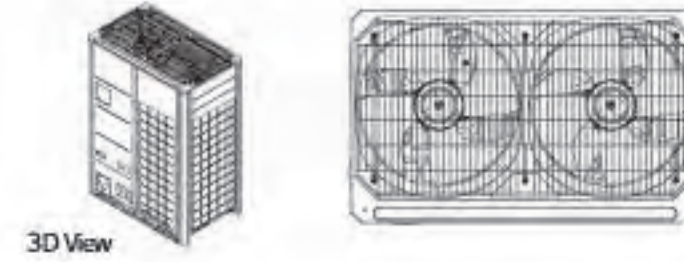

Q1 What are the differences between MULTI V IV and MULTI V 5?

Category	MULTI V IV R/P (ARUM***LFE4)	MULTI V 5 R/P & H/R (ARUM***LFE5)
Vapor Injection HPOR™	○	○
Smart Oil Control (Oil Level Sensor)	○	○
Active Refrigerant Control	○	○
Variable Heat Exchanger Circuit	○	○
Continuous Heating	○	○
Smart Load Control	○	○
Dual sensing (Humidity Sensor)	-	○
Comfort Cooling	○	○
Black Fin	-	○
Maximum Capacity (1 Unit / 4 Unit)	20 HP / 80 HP	26 HP / 96 HP
Height Difference (ODU - IDU / IDU - IDU)	110m / 40m	110m / 40m
Cooling Operating Range (OAT, °CDB)	-10 - 43	-15 - 48
Heating Operating Range (OAT, °CWB)	-25 - 18	-25 - 18
Combination ratio of IDU	1 Unit	50 - 200%
	2 Unit	50 - 160%
	3 or 4 Units	50 - 130%

○: Applied, -: Not Applied

Q2 Can MULTI V 5 ODU be connected with the 2 series indoor unit?

A2 Yes, MULTI V 5 ODU can be connected with the 2 series indoor unit. In this case, the ODU DIP Switch No.3 should be 'OFF' which is default setting. Refer to the below table.


ODU	IDU	Compatibility	ODU DIP Switch No. 3	If dip switch setting is not correct	Ref.
MULTI V IV MULTI V 5	Gen. 2 (ARU*2)	○	Must be OFF (factory default)	Can not communicate between Indoor & Outdoor unit (System will not be operated)	
	Gen. 4 (ARU*4)	○	Must be ON to enable gen. 4 functions	When Dip Switch No. 3 is OFF, System can be operated, but some function of Gen. 4 is not available	
	Gen. 2 + Gen. 4	○	Must be OFF (factory default)	When Dip Switch No. 3 is ON, Can not communicate between Gen. 2 Indoor & Outdoor unit (Gen. 2 units are not operated), only Gen. 4 Units are operated.	Some functions of Gen. 4 are not available

○: Applied, -: Not Applied

ODU dip switch setting procedure (No.3)


ODU main PCB dip switch is all "OFF" as default state.

- Check and make sure that all connected indoor units are 4 series (ARU*****) 4
- Change Dip switch No. 3 from OFF → ON
- Push the reset button

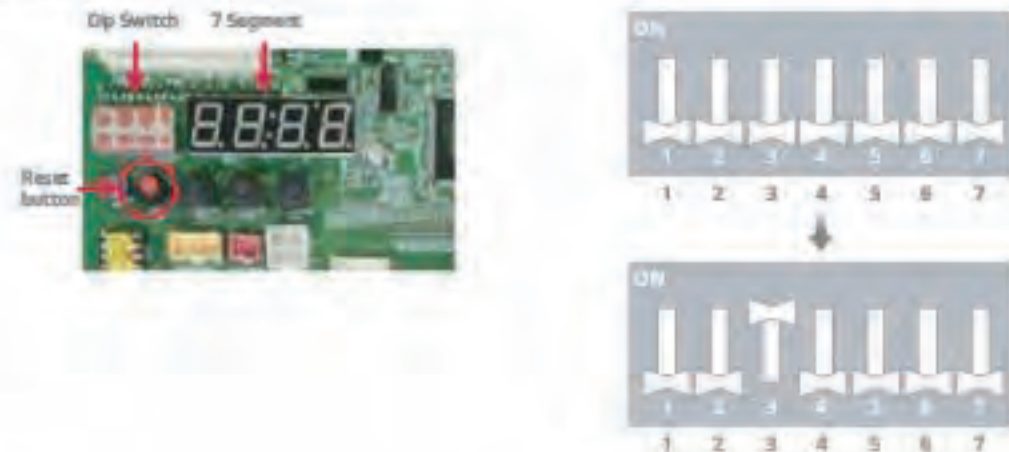


Q3 How does MULTI V 5 operate when humidity reference of the dual sensing SLC is that of the outdoor?

A3 During dual sensing SLC, outdoor unit changes target pressure of the system referring to temperature and humidity in cooling mode.
 - When the humidity of outdoor side is higher than that of indoor side, outdoor unit will lower target pressure to remove humidity, thus outdoor unit will consume more energy and indoor will be more cooled compared to SLC operation but would have higher efficiency as compared to normal operation.

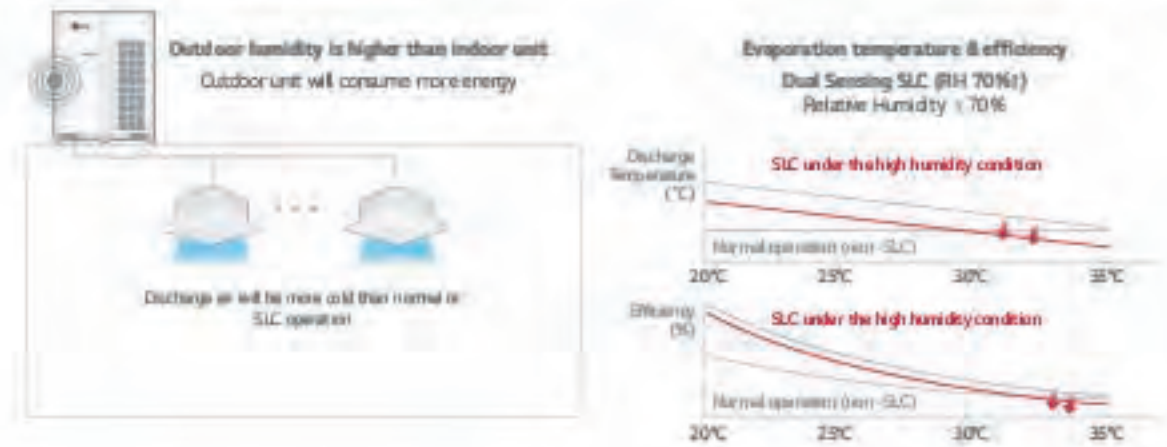

- When the humidity of outdoor side is lower than that of indoor side, outdoor unit will rise target pressure to save energy and keep comfort, but indoor humidity will be less removed compared to normal operation.

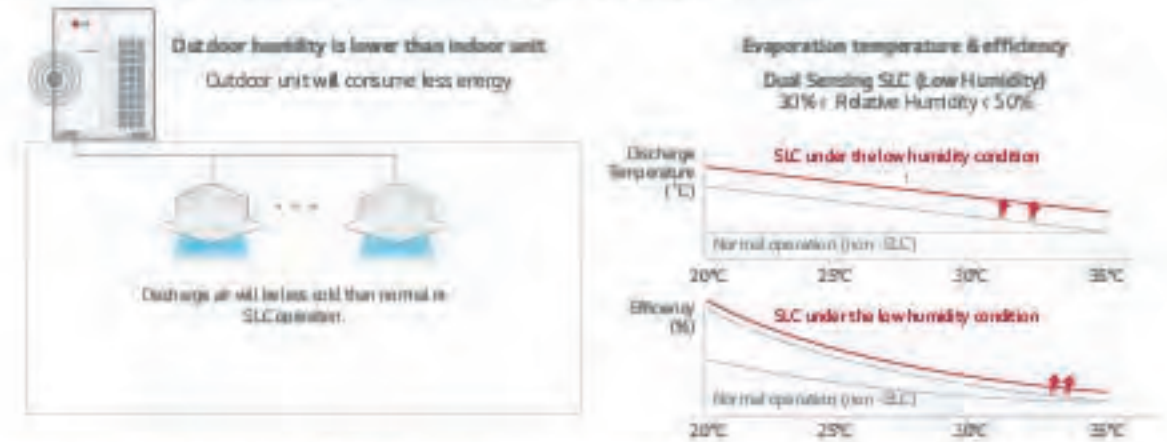


To maximize comfort and energy efficiency the outdoor unit's humidity sensing can be turned off or a standard remote control can be installed to sense indoor humidity.

Q4 What is the principle and accuracy of humidity sensor?

A4 Total Tolerance (%) = Sensor measurement tolerance (%) + Location of sensor tolerance (%)


The capacitive measurement principle established and proved itself as a standard in the past. For this principle, the sensor element is built out of a capacitor. The dielectric is a polymer which absorbs or releases water proportional to the relative environmental humidity and thus changes the capacitance of the capacitor. This change in capacitance can be measured by an electronic circuit. For humidity sensors with CMOSens® technology, a "micro-machined" finger electrode system with different protective and polymer cover layers forms the capacitance for the sensor chip, and, in addition to providing the sensor property, simultaneously protects the sensor from interference in ways previously not achieved.



Model	Humidity Sensor of Outdoor	Humidity Sensor of R/Controller
Size (mm)	3 x 3 x 1.1	2.5 x 2.5 x 0.9
Supply voltage range	2.1 to 3.6 V	2.4 to 5.5 V
RH operating range	0 ~ 100%RH	0 ~ 100%RH
T operating range	-40 to +125°C (-40 to +257°F)	-40 to +125°C (-40 to +257°F)
RH response time	8 sec (tau:63%)	8 sec (tau:63%)

Q5 What is difference in refrigerant piping connection between heat pump and heat recovery?

A5 From MULTI V 5, low pressure gas pipe in heat pump operation changes to high pressure gas pipe in heat recovery operation due to internal cycle. So for heat pump cycle, no. 1, 3 pipe should be connected and for heat recovery operation, No. 1, 2, 3 pipe is connected. (For the heat pump operation, DO NOT connect No.2 pipe)

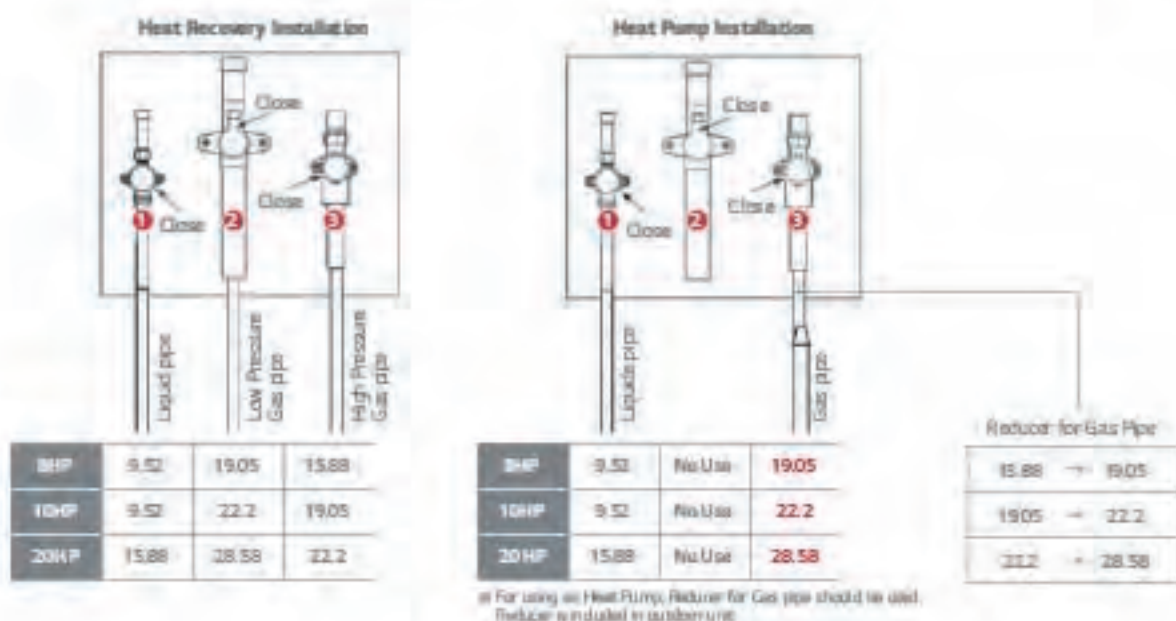

Other Questions

Item	Question	Answer
Fan	The static pressure of MULTI V 5 is Max 8mmAq as MULTI V 7?	Yes, the static pressure of MULTI V 5 is the same as MULTI V 7.
Compressor	Is the limitation of Compressor max Hz applied by the capacity of outdoor unit?	No, the limitation of comp Hz is not applied for default. But, it can be set by option for limitation of max Hz (or current).
4 Way VV	The usage of main & sub 4 way valve for MULTI V 5?	MULTI V 5 has the function of both H/P and H/R by one unit. Main valve has a function to change the operation mode (Cooling ↔ Heating) Sub Valve has a functions to change the product type (H/P ↔ H/R).
VI	In case of vapor injection, how much is the middle pressure?	The optimal middle pressure for vapor injection is 1.2 P _s . P _s : Suction pressure of compressor.
VI	By how much is heating capacity increased by vapor injection?	Generally, the heating capacity is increased up to 15 - 20%.
Humidity Sensor	Where is Indoor Humidity sensor?	It is placed inside of the RS3 remote controller.
Remote Controller	Does remote controller show the humidity information (Status) as well?	Yes. It shows the current humidity information on screen. (for RS3 Only) But has no function to control the humidity.
Remote Controller	Is it possible to connect the local humidity sensor with Remote controller (RS3)?	No. All of RS3 remote controller can not be connected with local humidity sensor.
SLC	Does dual sensing SLC function control the humidity ratio?	No. There is no control of humidity ratio.
SLC	Is SLC fully used on Eurovent? Isn't humidity fixed for the test? What about AHR?	Eurovent (RH 47%) and AHR (RH 51%) have fixed humidity test condition.
Comfort Cooling	Why is not the comfort heating applied in product?	Comfort cooling need super heating controlled and Comfort heating need sub cooling controlled. In case of controlling EEV for sub cooling, noise and stable operation may be affected and critical.
Installation	Does the IDU - Central controller direct connection for communication cable is possible? (Flat connection)	No, it is not possible.

ARUM080LTE5 / ARUM100LTE5
ARUM120LTE5 / ARUM140LTE5



IG participates in the ECP program for EUMENT VRF program. Check ongoing validity of certificate: www.ecert-certification.com

HP		8	10	12	14
Model Name	Combination Unit	ARUM080TE5	ARUM100TE5	ARUM120TE5	ARUM140TE5
	Independent Unit	ARUM080TE5	ARUM100TE5	ARUM120TE5	ARUM140TE5
Capacity	Cooling (Rated) kW	22.4	28.0	33.6	39.2
	Heating (Rated) kW	22.4	28.0	33.6	39.2
	Heating (Max) kW	25.2	31.5	37.8	44.1
	Cooling (Max) kW	5.28	6.53	7.71	8.67
Input	Heating (Rated) kW	3.97	4.92	5.85	6.48
	Heating (Max) kW	4.78	5.92	6.26	6.72
	Heating (Max) kW	4.24	4.10	4.36	4.52
SEER		8.93	9.49	9.57	8.89
COP	Rated Capacity	5.64	5.69	4.91	4.62
	Max Capacity	5.17	5.32	4.58	4.54
SCOP		4.69	4.51	5.01	4.63
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037
Heat Exchanger	Type	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 1	(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
	Motor Output x Number	4,200 x 1	5,300 x 1	5,300 x 1	5,300 x 1
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
	Oil Charge cc	3,900	3,900	3,900	3,900
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan
	Motor Output x Number	1,200 x 1	1,200 x 1	1,200 x 1	900 x 2
	Air Flow Rate (High) m³/min/No.	240 x 1	240 x 1	240 x 1	320 x 1
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER
Pipe Connections for Heat Recovery	Liquid Pipe	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Low Pressure Gas Pipe	Ø19.05 (3/4)	Ø22.2 (7/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Pipe Connections for Heat Pump	High Pressure Gas Pipe	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Liquid Pipe	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)	Ø12.7 (1/2)
Dimensions (W x H x D)	mm x No.	(930 x 1,690 x 760) x 1	(930 x 1,690 x 760) x 1	(930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1
	mm x No.	(960 x 1,825 x 796) x 1	(960 x 1,825 x 796) x 1	(960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1
Net Weight	kg x No.	198 x 1	215 x 1	215 x 1	237 x 1
	kg x No.	208 x 1	225 x 1	225 x 1	250 x 1
Sound Power Level	Cooling dB(A)	58.0	58.0	59.0	60.0
	Heating dB(A)	59.0	59.0	60.0	61.0
Sound Power Level	Cooling dB(A)	79.0	79.0	81.0	81.0
	Heating dB(A)	79.0	79.0	81.0	82.0
Communication Cable	mm² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
	Refrigerant Name	R410A	R410A	R410A	R410A
Refrigerant	Precharged Amount in Factory kg	7.5	9.5	9.5	13.5
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units †		13 (20)	16 (25)	20 (30)	23 (35)

†) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The maximum power/cooling capacity/maximum connectable indoor units are based on outdoor unit combination (1 (08) - 2 (08)). The recommended ratio is 1:3.5.

ARUM160LTE5 / ARUM180LTE5
ARUM200LTE5 / ARUM220LTE5



IG participates in the ECP program for EUMENT VRF program. Check ongoing validity of certificate: www.ecert-certification.com

HP		16	18	20	22
Model Name	Combination Unit	ARUM160TE5	ARUM180TE5	ARUM200TE5	ARUM220TE5
	Independent Unit	ARUM160TE5	ARUM180TE5	ARUM200TE5	ARUM220TE5
Capacity	Cooling (Rated) kW	44.8	50.4	56.0	61.6
	Heating (Rated) kW	44.8	50.4	56.0	61.6
	Heating (Max) kW	50.4	56.7	63.0	69.3
	Cooling (Max) kW	10.90	11.03	12.76	15.92
Input	Heating (Rated) kW	10.28	10.12	12.20	14.15
	Heating (Max) kW	12.39	11.94	14.69	16.76
	Heating (Max) kW	4.11	4.57	4.39	3.87
SEER		6.38	6.21	6.05	7.49
COP	Rated Capacity	4.36	4.98	4.59	4.35
	Max Capacity	4.07	4.75	4.29	4.13
SCOP		4.63	4.0	3.98	3.9
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037
Heat Exchanger	Type	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin	Wide Lower Fin / Black Fin
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 1	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2
	Motor Output x Number	5,300 x 1	(5,300 x 1) + (4,200 x 1)	(5,300 x 1) + (4,200 x 1)	(5,300 x 1) + (4,200 x 1)
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
	Oil Charge cc	3,900	3,200	3,200	3,200
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan
	Motor Output x Number	900 x 2	900 x 2	900 x 2	900 x 2
	Air Flow Rate (High) m³/min/No.	320 x 1	320 x 1	320 x 1	320 x 1
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER
Pipe Connections for Heat Recovery	Liquid Pipe	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Low Pressure Gas Pipe	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Pipe Connections for Heat Pump	High Pressure Gas Pipe	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Liquid Pipe	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1
	mm x No.	(1,280 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1
Net Weight	kg x No.	237 x 1	300 x 1	300 x 1	300 x 1
	kg x No.	250 x 1	312 x 1	312 x 1	312 x 1
Sound Power Level	Cooling dB(A)	60.5	61.0	64.5	64.5
	Heating dB(A)	61.5	62.0	64.5	65.5
Sound Power Level	Cooling dB(A)	85.0	87.0	89.0	91.0
	Heating dB(A)	86.0	87.0	90.0	93.0
Communication Cable	mm² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
	Refrigerant Name	R410A	R410A	R410A	R410A
Refrigerant	Precharged Amount in Factory kg	13.5	16.0	16.0	16.0
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units †		26 (40)	29 (45)	32 (50)	35 (56)

†) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The maximum power/cooling capacity/maximum connectable indoor units are based on outdoor unit combination (1 (08) - 2 (08)). The recommended ratio is 1:3.5.

ARUM240LTE5 / ARUM260LTE5
ARUM221LTE5 / ARUM241LTE5



Equipment listed in the ECP programme for EUROVENT VRF program. Check ongoing validity of certification: www.enert-certification.com

HP		24	26	22	24	
Model Name	Combination Unit	ARUM240LTE5	ARUM260LTE5	ARUM221LTE5	ARUM241LTE5	
	Independent Unit	ARUM240LTE5	ARUM260LTE5	ARUM120LTE5 ARUM100LTE5	ARUM120LTE5 ARUM100LTE5	
Capacity	Cooling (Rated)	kW	67.2	72.8	61.6	67.2
	Heating (Rated)	kW	67.2	67.2	61.6	67.2
	Heating (Max)	kW	74.3	74.3	69.3	75.6
Input	Cooling (Rated)	kW	17.41	20.22	14.54	15.41
	Heating (Rated)	kW	15.89	15.89	11.77	13.70
	Heating (Max)	kW	19.80	19.15	14.18	16.52
EER		3.86	3.60	4.24	4.36	
SEER		7.86	7.55	-	-	
COP	Rated Capacity	4.23	4.23	5.23	4.91	
	Max Capacity	3.95	3.86	4.89	4.59	
SCOP		4.34	4.34	-	-	
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	
Heat Exchanger	Type	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	
Compressor	Combination x No.	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	
	Motor Output x Number	W x No.	5,300 x 2	5,300 x 2	5,300 x 2	
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	
	Oil Charge	cc	5,200	7,800	7,800	
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	
	Motor Output x Number	W x No.	900 x 2	900 x 2	(1,200 x 1) + (1,200 x 1)	(1,200 x 1) + (1,200 x 1)
	Air Flow Rate (High)	m³/min x No.	320 x 1	320 x 1	(240 x 1) + (240 x 1)	(240 x 1) + (240 x 1)
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	
Pipe Connections for Heat Recovery	Discharge	Side / Top	TOP	TOP	TOP	
	Liquid Pipe	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Low Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø28.58 (1-1/8)	Ø34.9 (1-3/8)
	High Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Pipe Connections for Heat Pump	Liquid Pipe	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø28.58 (1-1/8)	Ø34.9 (1-3/8)
Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1	(930 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(930 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	
Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1	(960 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(960 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	
Net Weight	kg x No.	310 x 1	310 x 1	(215 x 1) + (215 x 1)	(215 x 1) + (215 x 1)	
Shipping Weight	kg x No.	320 x 1	320 x 1	(225 x 1) + (225 x 1)	(225 x 1) + (225 x 1)	
Sound Pressure Level	Cooling	dB(A)	63.0	65.0	61.5	63.0
	Heating	dB(A)	67.0	67.0	62.5	63.0
Sound Power Level	Cooling	dB(A)	91.0	91.0	83.1	84.0
	Heating	dB(A)	93.0	93.0	83.1	84.0
Communication Cable	mm² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name	R410A	R410A	R410A	R410A	
	Precharged Amount in Factory	kg	17.0	17.0	19.0	19.0
Control	Electronic Expansion Valve	35.488	35.488	39.663	39.663	
	Control	Electronic Expansion Valve	3,380-415, 50	3,380-415, 50	3,380-415, 50	3,380-415, 50
Power Supply	Ø, V Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units †		39 (61)	42 (64)	35 (44)	39 (48)	

†) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses show maximum connectable indoor units in accordance with outdoor units combination (10.0% - 30%). The recommended ratio is 1:3.5.
‡) Applying to 24 and 26HP outdoor units only.

ARUM261LTE5 / ARUM280LTE5
ARUM300LTE5 / ARUM320LTE5



HP		26	28	30	32	
Model Name	Combination Unit	ARUM261LTE5	ARUM280LTE5	ARUM300LTE5	ARUM320LTE5	
	Independent Unit	ARUM140LTE5 ARUM120LTE5	ARUM160LTE5 ARUM120LTE5	ARUM180LTE5 ARUM120LTE5	ARUM200LTE5 ARUM120LTE5	
Capacity	Cooling (Rated)	kW	72.8	78.4	84.0	89.6
	Heating (Rated)	kW	72.8	78.4	84.0	89.6
	Heating (Max)	kW	81.9	88.2	94.5	100.8
Input	Cooling (Rated)	kW	16.38	18.61	18.73	20.46
	Heating (Rated)	kW	15.33	17.13	16.97	19.05
	Heating (Max)	kW	17.96	20.65	20.20	22.95
EER		4.44	4.21	4.48	4.38	
SEER		-	-	-	-	
COP	Rated Capacity	4.75	4.58	4.95	4.70	
	Max Capacity	4.56	4.27	4.68	4.39	
SCOP		-	-	-	-	
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	
Heat Exchanger	Type	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	
Compressor	Combination x No.	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	(Inverter) x 3	
	Motor Output x Number	W x No.	5,300 x 2	5,300 x 2	(5,300 x 2) + (4,200 x 1)	(5,300 x 2) + (4,200 x 1)
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	
	Oil Charge	cc	7,800	7,800	9,100	9,100
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	
	Motor Output x Number	W x No.	(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (240 x 1)	(320 x 1) + (240 x 1)	(320 x 1) + (240 x 1)	(320 x 1) + (240 x 1)
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	
Pipe Connections for Heat Recovery	Discharge	Side / Top	TOP	TOP	TOP	
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	High Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Pipe Connections for Heat Pump	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	
Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	
Net Weight	kg x No.	(237 x 1) + (215 x 1)	(237 x 1) + (215 x 1)	(300 x 1) + (215 x 1)	(300 x 1) + (215 x 1)	
Shipping Weight	kg x No.	(250 x 1) + (225 x 1)	(250 x 1) + (225 x 1)	(312 x 1) + (225 x 1)	(312 x 1) + (225 x 1)	
Sound Pressure Level	Cooling	dB(A)	62.5	62.8	63.1	63.8
	Heating	dB(A)	63.5	63.8	64.1	65.8
Sound Power Level	Cooling	dB(A)	84.0	85.5	86.0	89.6
	Heating	dB(A)	84.5	87.2	88.0	90.5
Communication Cable	mm² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name	R410A	R410A	R410A	R410A	
	Precharged Amount in Factory	kg	23.0	23.0	25.5	25.5
Control	Electronic Expansion Valve	48.013	48.013	53.231	53.231	
	Control	Electronic Expansion Valve	3,380-415, 50	3,380-415, 50	3,380-415, 50	3,380-415, 50
Power Supply	Ø, V Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units †		42 (52)	45 (56)	49 (60)	52 (64)	

†) Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses show maximum connectable indoor units in accordance with outdoor units combination (10.0% - 30%). The recommended ratio is 1:3.5.

ARUM340LTE5 / ARUM360LTE5
ARUM380LTE5 / ARUM400LTE5



HP		34	36	38	40	
Model Name	Combination Unit	ARUM340TE5	ARUM360TE5	ARUM380TE5	ARUM400TE5	
	Independent Unit	ARUM220TE5 ARUM120TE5	ARUM240TE5 ARUM120TE5	ARUM240TE5 ARUM140TE5	ARUM240TE5 ARUM240TE5	
Capacity	Cooling (Rated)	kW	95.2	100.8	106.4	112.0
	Heating (Rated)	kW	95.2	100.8	106.4	112.0
	Heating (Max)	kW	107.1	112.1	118.4	124.7
	Cooling (Rated)	kW	136.2	141.2	147.6	154.0
Input	Heating (Rated)	kW	21.00	22.74	24.37	25.17
	Heating (Max)	kW	25.02	27.08	28.52	31.19
EER		4.03	4.01	4.08	3.98	
SEER		-	-	-	-	
COP	Rated Capacity	4.53	4.43	4.37	4.28	
	Max Capacity	4.28	4.14	4.15	4.00	
SCOP		-	-	-	-	
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	
Heat Exchanger	Type	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	
Compressor	Combination x No.	(Inverter) x 3	(Inverter) x 3	(Inverter) x 3	(Inverter) x 3	
	Motor Output x Number	W x No.	(5,300 x 2) + (4,200 x 1)	5,300 x 3	5,300 x 3	5,300 x 3
	Oil Type	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	
	Oil Charge	cc	9,100	9,100	9,100	9,100
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	
	Motor Output x Number	W x No.	(900 x 2) + (1,200 x 1)	(900 x 2) + (1,200 x 1)	900 x 4	900 x 4
	Air Flow Rate (High)	m³/min x No.	(320 x 1) + (240 x 1)	(320 x 1) + (240 x 1)	320 x 2	320 x 2
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	
Pipe Connections for Heat Recovery	Discharge	Side / Top	TOP	TOP	TOP	
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(1,280 x 1,690 x 760) x 1 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 2	(1,240 x 1,690 x 760) x 2
	Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 1 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 2	(1,280 x 1,825 x 796) x 2
Net Weight	kg x No.	(300 x 1) + (215 x 1)	(310 x 1) + (215 x 1)	(310 x 1) + (237 x 1)	(310 x 1) + (237 x 1)	
Shipping Weight	kg x No.	(312 x 1) + (225 x 1)	(320 x 1) + (225 x 1)	(320 x 1) + (250 x 1)	(320 x 1) + (250 x 1)	
Sound	Cooling	dB(A)	65.6	66.0	66.2	66.3
	Pressure Level	dB(A)	66.6	67.8	68.0	68.1
	Heating	dB(A)	91.4	91.4	91.4	92.0
	Level	dB(A)	93.3	93.3	93.3	93.8
Communication Cable	mm² x No. (VCTP-5B)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
	Refrigerant Name	R410A	R410A	R410A	R410A	
Refrigerant	Precharged Amount in Factory	kg	25.5	26.5	30.5	30.5
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units ¹⁾		55 (64)	58 (64)	61 (64)	64	

¹⁾ Maximum number are prepared based on assumption that all 2.5kW indoor units are connected. The number of connectable indoor units is determined with outdoor unit combination (100% ~ 200%). The recommended ratio is 1:2.5.

ARUM420LTE5 / ARUM440LTE5
ARUM460LTE5 / ARUM480LTE5



HP		42	44	46	48	
Model Name	Combination Unit	ARUM420TE5	ARUM440TE5	ARUM460TE5	ARUM480TE5	
	Independent Unit	ARUM240TE5 ARUM180TE5	ARUM240TE5 ARUM200TE5	ARUM240TE5 ARUM220TE5	ARUM240TE5 ARUM240TE5	
Capacity	Cooling (Rated)	kW	117.6	123.2	128.8	134.4
	Heating (Rated)	kW	117.6	123.2	128.8	134.4
	Heating (Max)	kW	131.0	137.3	143.6	148.5
	Cooling (Rated)	kW	28.44	30.17	33.33	34.82
Input	Heating (Rated)	kW	26.01	28.09	30.04	31.78
	Heating (Max)	kW	30.74	33.48	35.56	37.60
EER		4.14	4.08	3.98	3.86	
SEER		-	-	-	-	
COP	Rated Capacity	4.52	4.39	4.29	4.23	
	Max Capacity	4.26	4.10	4.04	3.95	
SCOP		-	-	-	-	
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	
Heat Exchanger	Type	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	
Compressor	Combination x No.	(Inverter) x 4	(Inverter) x 4	(Inverter) x 4	(Inverter) x 4	
	Motor Output x Number	W x No.	(5,300 x 3) + (4,200 x 1)	(5,300 x 3) + (4,200 x 1)	(5,300 x 3) + (4,200 x 1)	5,300 x 4
	Oil Type	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	
	Oil Charge	cc	10,400	10,400	10,400	10,400
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	
	Motor Output x Number	W x No.	900 x 4	900 x 4	900 x 4	900 x 4
	Air Flow Rate (High)	m³/min x No.	320 x 2	320 x 2	320 x 2	320 x 2
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	
Pipe Connections for Heat Pump	Discharge	Side / Top	TOP	TOP	TOP	
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 2	(1,240 x 1,690 x 760) x 2	(1,240 x 1,690 x 760) x 2	(1,240 x 1,690 x 760) x 2
	Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 2	(1,280 x 1,825 x 796) x 2	(1,280 x 1,825 x 796) x 2	(1,280 x 1,825 x 796) x 2
Net Weight	kg x No.	(310 x 1) + (300 x 1)	(310 x 1) + (300 x 1)	(310 x 1) + (300 x 1)	310 x 2	
Shipping Weight	kg x No.	(320 x 1) + (312 x 1)	(320 x 1) + (312 x 1)	(320 x 1) + (312 x 1)	320 x 2	
Sound	Cooling	dB(A)	66.5	66.8	67.8	68.0
	Pressure Level	dB(A)	68.2	68.9	69.3	70.0
	Heating	dB(A)	92.5	93.1	94.0	94.0
	Level	dB(A)	94.0	94.8	96.0	96.0
Communication Cable	mm² x No. (VCTP-5B)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
	Refrigerant Name	R410A	R410A	R410A	R410A	
Refrigerant	Precharged Amount in Factory	kg	33.0	33.0	34.0	34.0
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units ¹⁾		64	64	64	64	

¹⁾ Maximum number are prepared based on assumption that all 2.5kW indoor units are connected. The number of connectable indoor units is determined with outdoor unit combination (100% ~ 200%). The recommended ratio is 1:2.5.

ARUM500LTE5 / ARUM520LTE5
ARUM540LTE5 / ARUM560LTE5



HP		S0	S2	S4	S6	
Model Name	Combination Unit	ARUM500LTE5	ARUM520LTE5	ARUM540LTE5	ARUM560LTE5	
	Independent Unit	ARUM240LTE5 ARUM140LTE5 ARUM120LTE5	ARUM240LTE5 ARUM160LTE5 ARUM120LTE5	ARUM240LTE5 ARUM180LTE5 ARUM120LTE5	ARUM240LTE5 ARUM200LTE5 ARUM120LTE5	
Capacity	Cooling (Rated)	kW	140	145.6	151.2	156.8
	Heating (Rated)	kW	140	145.6	151.2	156.8
	Heating (Max)	kW	156.2	162.5	168.8	175.1
	Cooling (Rated)	kW	33.79	35.02	36.14	37.87
Input	Heating (Rated)	kW	31.22	33.02	32.86	34.94
	Heating (Max)	kW	36.78	39.45	39.00	41.74
	EER		4.14	4.04	4.18	4.14
SEER		-	-	-	-	
COP	Rated Capacity		4.48	4.41	4.60	4.49
	Max Capacity		4.25	4.12	4.33	4.19
SCOP						
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	
Heat Exchanger	Type	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	
Compressor	Combination & No.	(Inverter) x 4	(Inverter) x 4	(Inverter) x 5	(Inverter) x 5	
	Motor Output & Number	W x No.	5,300 x 4	5,300 x 4	(5,300 x 4) + (4,200 x 1)	(5,300 x 4) + (4,200 x 1)
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	
	Oil Charge	cc	13,000	13,000	14,300	14,300
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	
	Motor Output & Number	W x No.	(900 x 4) + (1,200 x 1)	(900 x 4) + (1,200 x 1)	(900 x 4) + (1,200 x 1)	(900 x 4) + (1,200 x 1)
	Air Flow Rate (High)	m³/min x No.	(320 x 2) + (240 x 1)	(320 x 2) + (240 x 1)	(320 x 2) + (240 x 1)	(320 x 2) + (240 x 1)
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	
Pipe Connections for Heat Recovery	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
Pipe Connections for Heat Pump	Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1
Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	
	Net Weight	kg x No.	(310 x 1) + (237 x 1) + (215 x 1)	(310 x 1) + (237 x 1) + (215 x 1)	(310 x 1) + (300 x 1) + (215 x 1)	(310 x 1) + (300 x 1) + (215 x 1)
Shipping Weight	kg x No.	(320 x 1) + (250 x 1) + (225 x 1)	(320 x 1) + (250 x 1) + (225 x 1)	(320 x 1) + (312 x 1) + (225 x 1)	(320 x 1) + (312 x 1) + (225 x 1)	
	Sound Pressure Level	dB(A)	67.0	67.1	67.2	67.4
Sound Power Level	Cooling	dB(A)	68.6	68.7	68.8	69.5
	Heating	dB(A)	91.8	92.3	92.8	93.4
Communication Cable	mm x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
	Refrigerant Name	R410A	R410A	R410A	R410A	
Refrigerant	Pre-charged Amount in Factory	kg	40	40	42.5	
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units *		64	64	64	64	

* Maximum number are prepared based on capacity that all 2.2kW indoor units are connected. The number of power lines must be made in accordance with the applicable code of practice (100% - 200%). The recommended size is 1.0mm.

ARUM580LTE5 / ARUM600LTE5 / ARUM620LTE5
ARUM640LTE5 / ARUM660LTE5



HP		S8	S0	S2	S4	S6
Model Name	Combination Unit	ARUM580LTE5	ARUM600LTE5	ARUM620LTE5	ARUM640LTE5	ARUM660LTE5
	Independent Unit	ARUM240LTE5 ARUM220LTE5 ARUM120LTE5	ARUM240LTE5 ARUM200LTE5 ARUM120LTE5	ARUM240LTE5 ARUM240LTE5 ARUM140LTE5	ARUM240LTE5 ARUM240LTE5 ARUM160LTE5	ARUM240LTE5 ARUM240LTE5 ARUM180LTE5
Capacity	Cooling (Rated)	kW	162.4	168.0	173.6	179.2
	Heating (Rated)	kW	162.4	168.0	173.6	179.2
	Heating (Max)	kW	181.4	186.3	192.6	198.9
	Cooling (Rated)	kW	41.03	42.53	43.49	45.72
Input	Heating (Rated)	kW	36.89	38.63	40.26	42.06
	Heating (Max)	kW	43.82	45.86	47.32	49.99
	EER		3.96	3.95	3.99	3.92
SEER		-	-	-	-	
COP	Rated Capacity		4.40	4.38	4.31	4.26
	Max Capacity		4.14	4.06	4.07	3.96
SCOP						
Exterior	Color	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL Code (Classic)	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037
Heat Exchanger	Type	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin
	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination & No.	(Inverter) x 5	(Inverter) x 5	(Inverter) x 5	(Inverter) x 5	(Inverter) x 6
	Motor Output & Number	W x No.	(5,300 x 4) + (4,200 x 1)	5,300 x 5	5,300 x 5	5,300 x 5 + (4,200 x 1)
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
	Oil Charge	cc	14,300	14,300	14,300	15,600
Fan	Type	Propeller fan	Propeller fan	Propeller fan	Propeller fan	Propeller fan
	Motor Output & Number	W x No.	(900 x 4) + (1,200 x 1)	(900 x 4) + (1,200 x 1)	900 x 6	900 x 6
	Air Flow Rate (High)	m³/min x No.	(320 x 2) + (240 x 1)	(320 x 2) + (240 x 1)	320 x 3	320 x 3
	Drive	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER	DC INVERTER
Pipe Connections for Heat Recovery	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Low Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)
	High Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø41.3 (1-3/8)	Ø44.5 (1-3/4)
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø22.2 (7/8)	Ø22.2 (7/8)
Pipe Connections for Heat Pump	Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)
	Dimensions (W x H x D)	mm x No.	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 2 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 3	(1,240 x 1,690 x 760) x 3
Dimensions (W x H x D) - Shipping	mm x No.	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 2 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 3	(1,280 x 1,825 x 796) x 3	
	Net Weight	kg x No.	(310 x 1) + (300 x 1) + (215 x 1)	(310 x 1) + (235 x 1)	(310 x 2) + (235 x 1)	(310 x 2) + (300 x 1)
Shipping Weight	kg x No.	(320 x 1) + (312 x 1) + (225 x 1)	(320 x 1) + (225 x 1)	(320 x 2) + (225 x 1)	(320 x 2) + (250 x 1)	
	Sound Pressure Level	dB(A)	68.3	68.3	68.6	68.7
Sound Power Level	Cooling	dB(A)	69.8	70.4	70.5	70.6
	Heating	dB(A)	94.2	94.2	94.2	94.8
Communication Cable	mm x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
	Refrigerant Name	R410A	R410A	R410A	R410A	
Refrigerant	Pre-charged Amount in Factory	kg	42.5	43.5	47.5	
	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units *		64	64	64	64	

* Maximum number are prepared based on capacity that all 2.2kW indoor units are connected. The number of power lines must be made in accordance with the applicable code of practice (100% - 200%). The recommended size is 1.0mm.

ARUM680LTE5 / ARUM700LTE5 / ARUM720LTE5
ARUM740LTE5 / ARUM760LTE5



HP			68	70	72	74	76
Model Name	Combination Unit		ARUM680LTE5	ARUM700LTE5	ARUM720LTE5	ARUM740LTE5	ARUM760LTE5
	Independent Unit		ARUMD40LTE5 ARUMD240LTE5 ARUMD00LTE5	ARUMD40LTE5 ARUMD240LTE5 ARUMD20LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5
Capacity	Cooling (Rated)	KW	190.4	196.0	201.6	207.2	212.8
	Heating (Rated)	KW	190.4	196.0	201.6	207.2	212.8
	Heating (Max)	KW	211.5	217.8	222.8	230.4	236.7
	Cooling (Rated)	KW	47.57	50.74	52.23	51.20	53.43
Input	Heating (Rated)	KW	43.98	45.93	47.67	47.11	48.91
	Heating (Max)	KW	52.28	54.36	56.40	55.58	58.25
	EER		4.00	3.86	3.86	4.05	3.98
SEER	Rated Capacity		4.33	4.27	4.23	4.40	4.35
	Max Capacity		4.05	4.01	3.95	4.15	4.06
SCOP	Color		Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL Code (Classic)		RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037
Heat Exchanger	Type		Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin
	Type		Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool
Compressor	Combination x No.		(Inverter) x 6 (5,300 x 5) + (4,200 x 1)	(Inverter) x 6 (5,300 x 5) + (4,200 x 1)	(Inverter) x 6 (5,300 x 6)	(Inverter) x 6 (5,300 x 6)	(Inverter) x 6 (5,300 x 6)
	Motor Output x Number	W x No.	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Type		15,600	15,600	15,600	18,200	18,200
	Oil Charge	cc	Propeller fan	Propeller fan	Propeller fan	Propeller fan	Propeller fan
Fan	Motor Output x Number	W x No.	900 x 6	900 x 6	900 x 6	(900 x 6) + (1,200 x 1)	(900 x 6) + (1,200 x 1)
	Air Flow Rate (High)	m ³ /min x No.	320 x 3	320 x 3	320 x 3	(320 x 3) + (240 x 1)	(320 x 3) + (240 x 1)
Pipe Connections for Heat Recovery	Liquid Pipe	mm (inch)	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP
	Low Pressure Gas Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
Pipe Connections for Heat Pump	High Pressure Gas Pipe	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	Liquid Pipe	mm (inch)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)
Dimensions (W x H x D)	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Gas Pipe	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
Dimensions (W x H x D) - Shipping	mm x No.		(1,240 x 1,690 x 760) x 3	(1,240 x 1,690 x 760) x 3	(1,240 x 1,690 x 760) x 3	(1,240 x 1,690 x 760) x 3 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 3 + (930 x 1,690 x 760) x 1
	mm x No.		(1,280 x 1,825 x 796) x 3	(1,280 x 1,825 x 796) x 3	(1,280 x 1,825 x 796) x 3	(1,280 x 1,825 x 796) x 3 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 3 + (960 x 1,825 x 796) x 1
Net Weight	kg x No.		(310 x 2) + (300 x 1)	(310 x 2) + (300 x 1)	310 x 3	(310 x 2) + (237 x 1) + (215 x 1)	(310 x 2) + (237 x 1) + (215 x 1)
	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1)	320 x 3	(320 x 2) + (250 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
Shipping Weight	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1)	320 x 3	(320 x 2) + (250 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1)	320 x 3	(320 x 2) + (250 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
Sound Power Level	Cooling	dB(A)	69.0	69.6	69.8	69.1	69.2
	Heating	dB(A)	71.1	71.3	71.8	70.9	71.4
Sound Power Level	Cooling	dB(A)	95.1	95.0	95.8	94.4	94.7
	Heating	dB(A)	97.0	97.9	97.8	96.3	96.5
Communication Cable	mm ² x No. (VCTF-SB)		1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
	Refrigerant Name		R410A	R410A	R410A	R410A	R410A
Refrigerant	Precharged Amount in Factory	kg	50.0	50.0	51.0	57.0	57.0
	Control		104.375	104.375	106.463	118.988	118.988
Power Supply	Expansion Valve		Electronic	Electronic	Electronic	Electronic	Electronic
	Expansion Valve		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units †	Q, V, Hz		64	64	64	64	64
	Q, V, Hz		64	64	64	64	64

†) Maximum number are provided based on assumption that all 2.3kW indoor units are connected. The number is provided as a reference only. Actual number may vary depending on outdoor unit combination (±0.5% ~ ±2.0%). The recommended ratio is 1:2.5.

ARUM780LTE5 / ARUM800LTE5 / ARUM820LTE5
ARUM840LTE5 / ARUM860LTE5



HP			78	80	82	84	86
Model Name	Combination Unit		ARUM780LTE5	ARUM800LTE5	ARUM820LTE5	ARUM840LTE5	ARUM860LTE5
	Independent Unit		ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5	ARUMD40LTE5 ARUMD40LTE5 ARUMD40LTE5
Capacity	Cooling (Rated)	KW	218.4	224.0	229.6	235.2	240.8
	Heating (Rated)	KW	218.4	224.0	229.6	235.2	240.8
	Heating (Max)	KW	243.0	249.3	255.8	262.6	269.9
	Cooling (Rated)	KW	53.55	55.28	58.44	59.93	60.90
Input	Heating (Rated)	KW	48.75	50.83	52.78	54.52	56.15
	Heating (Max)	KW	57.80	60.54	62.82	64.66	66.12
	EER		4.08	4.05	3.93	3.92	3.95
SEER	Rated Capacity		4.48	4.41	4.35	4.31	4.29
	Max Capacity		4.20	4.12	4.08	4.03	4.04
SCOP	Color		Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL Code (Classic)		RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037	RAL 7030 / RAL 7037
Heat Exchanger	Type		Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin	Wide Lower Plus / Black Fin
	Type		Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool	Hermetically Sealed Sool
Compressor	Combination x No.		(Inverter) x 7 (5,300 x 6) + (4,200 x 1)	(Inverter) x 7 (5,300 x 6) + (4,200 x 1)	(Inverter) x 7 (5,300 x 6) + (4,200 x 1)	(Inverter) x 7 (5,300 x 7)	(Inverter) x 7 (5,300 x 7)
	Motor Output x Number	W x No.	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Type		19,500	19,500	19,500	15,500	19,500
	Oil Charge	cc	Propeller fan	Propeller fan	Propeller fan	Propeller fan	Propeller fan
Fan	Motor Output x Number	W x No.	(900 x 6) + (1,200 x 1)	(900 x 6) + (1,200 x 1)	(900 x 6) + (1,200 x 1)	(900 x 6) + (1,200 x 1)	900 x 8
	Air Flow Rate (High)	m ³ /min x No.	(320 x 3) + (240 x 1)	(320 x 3) + (240 x 1)	(320 x 3) + (240 x 1)	(320 x 3) + (240 x 1)	320 x 4
Pipe Connections for Heat Recovery	Liquid Pipe	mm (inch)	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP	DC INVERTER TOP
	Low Pressure Gas Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
Pipe Connections for Heat Pump	High Pressure Gas Pipe	mm (inch)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)
	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
Dimensions (W x H x D)	Gas Pipe	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	mm x No.		(1,240 x 1,690 x 760) x 3	(1,240 x 1,690 x 760) x 3 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 3 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 3 + (930 x 1,690 x 760) x 1	(1,240 x 1,690 x 760) x 4
Dimensions (W x H x D) - Shipping	mm x No.		(1,280 x 1,825 x 796) x 3	(1,280 x 1,825 x 796) x 3 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 3 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 3 + (960 x 1,825 x 796) x 1	(1,280 x 1,825 x 796) x 4
	mm x No.		(310 x 2) + (300 x 1)	(310 x 2) + (300 x 1) + (215 x 1)	(310 x 2) + (300 x 1) + (215 x 1)	(310 x 2) + (300 x 1) + (215 x 1)	(310 x 2) + (237 x 1) + (215 x 1)
Net Weight	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
Shipping Weight	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
	kg x No.		(320 x 2) + (312 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (312 x 1) + (225 x 1)	(320 x 2) + (250 x 1) + (225 x 1)
Sound Power Level	Cooling	dB(A)	69.2	69.4	70.0	70.1	70.2
	Heating	dB(A)	71.0	71.4	71.6	72.1	72.1
Sound Power Level	Cooling	dB(A)	95.0	95.4	95.9	95.9	95.9
	Heating	dB(A)	96.6	97.1	97.9	97.9	97.9
Communication Cable	mm ² x No. (VCTF-SB)		1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
	Refrigerant Name		R410A	R410A	R410A	R410A	R410A
Refrigerant	Precharged Amount in Factory	kg	59.5	59.5	59.5	60.5	64.5
	Control		124.206	124.206	124.206	128.294	134.644
Power Supply	Expansion Valve		Electronic	Electronic	Electronic	Electronic	Electronic
	Expansion Valve		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units †	Q, V, Hz		64	64	64	64	64
	Q, V, Hz		64	64	64	64	64

†) Maximum number are provided based on assumption that all 2.3kW indoor units are connected. The number is provided as a reference only. Actual number may vary depending on outdoor unit combination (±0.5% ~ ±2.0%). The recommended ratio is 1:2.5.

MULTI V™ S

Highlight

- Air cooled VRF Heat pump & Heat Recovery
- 12.1 – 33.6kW (Cooling capacity based)
- Both 1Ø, 220 – 240V, 50Hz and 3Ø, 380 – 415V, 50Hz
- Side discharge outdoor unit
- Includes the industry's first single phase Heat Recovery system
- Includes the industry's first R32 side discharge



Energy savings



Reliability




Convenience

How does it work?

Available in Heat Pump and Heat Recovery Configurations




Combination of Cooling, Heating and Hot Water Solution

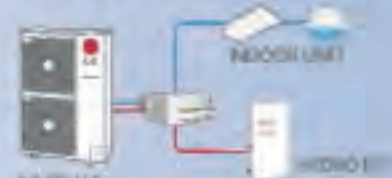

MULTI V S Heat Recovery
if Heat Pump and Recovery equipped model



OUTDOOR UNITS

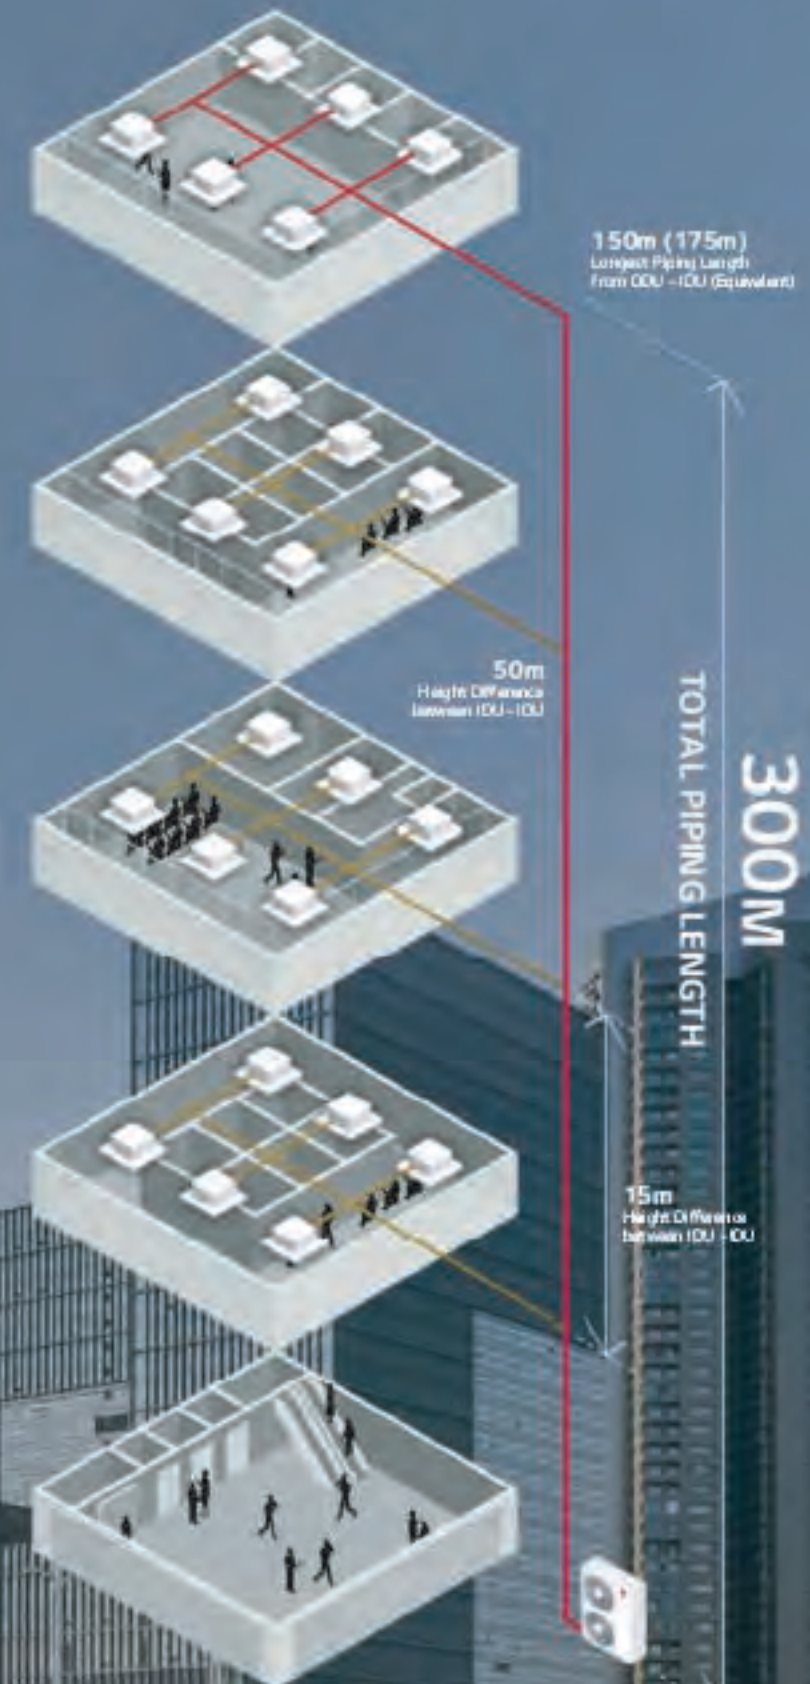


* Only applies to Multi V S with R410A refrigerant.

EER / COP / Part Load


Cost savings with energy efficiency

Heat Pump

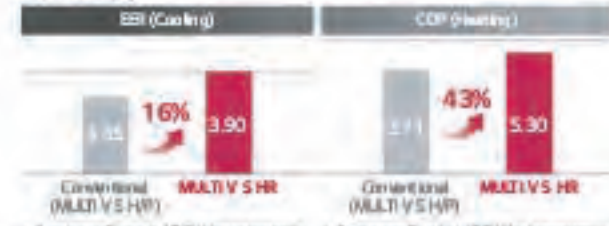

Comparison based on 13.5kW in cooling mode. Comparison based on 13.5kW in heating mode.

Heat Recovery

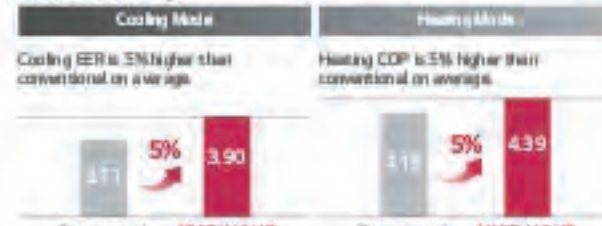


Comparison based on 13.5kW in cooling mode. Comparison based on 13.5kW in heating mode.

Smart Load Control Applied

Enhanced comfort and up to 23% energy savings with MULTI V load control

MULTI V S changes indoor discharge air temperature continuously according to load, to save energy.

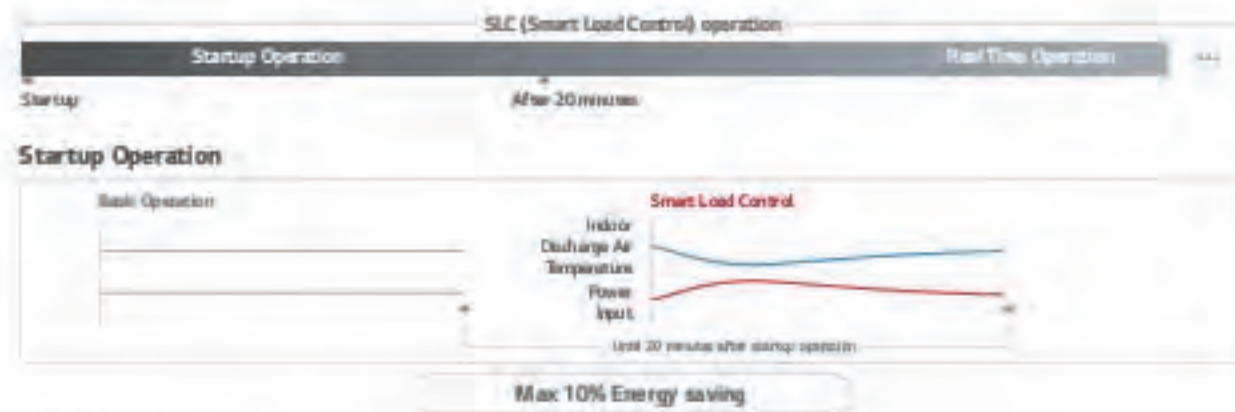

- Indoor air discharge temperature
- Energy efficiency increased by 5-digits Smart Load Control during startup phase
- Discharge air temperature adjusted according to outdoor and indoor temperature
- Comfort level in cooling / heating operations ensured


Real Time Operation



- Flow back up / By-apt switch in outdoor unit (Referred to Product DataBook) factory default setting is OFF
- Outdoor temperature condition: EER 10.0% / 75% / 50% / 25% = 35°C (DB) / 30°C (DB) / 25°C (DB) / 20°C (DB)
- Indoor temperature condition: 27°C (DB) / 19°C (WB)
- Outdoor air velocity (Temperature & Humidity) smart load control is possible with (H) mode control (PT060E100 (White) / PT060E070 (Black))

Inverter Twin Rotary & Inverter Scroll Compressor

Adapted High Efficient Compressor according to Capacity

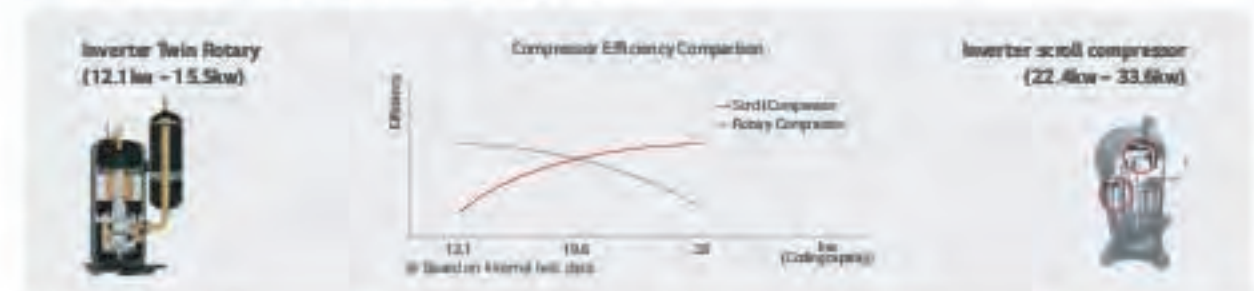

Inverter Twin Rotary

Concentrated Winding Motor

Oil path area is improved by over 30% by increasing the rotor outer cavity. Due to this, oil-cake value of rotor is reduced, improving the cooling function of motor coil.

Twin Rotary Rotor

Upper and lower part rotor offset structure in shaft cross section. Vibration and noise is reduced. Max torque load decreased by 45% compared to single rotor.

Surface Coating

Surface coating of outstanding ultraviolet resistance property on seaward crankshaft.

Inverter scroll compressor

Best-in-class Compressor Speed

- Rapid response capability
- Compact case design (Cross-wound motor)
- Down to 1.5Hz: Part load efficiency improvement

5 Bypass Valve

Compressor reliability is maximized with 5 Bypass Valve

- Prevent compressor damage due to excessively compressed refrigerant more efficiently than 4 Bypass valve

Direct Oil Injection

- Eliminate suction refrigerant gas (heat loss through) direct oil injection into compression chamber (Efficiency increase)
- Increased reliability with regulated oil supply


Scroll Profile

- Thermal stress reliability by increased reliability with regulated oil supply
- Efficiency increased by expanding 98% By-pass area and 17% increased volume ratio by non-uniform scroll thickness

Optimal Heat Exchanger


Maximize Efficiency according to different Heat Exchanger path by cooling and heating

Variable Heat Exchanger Circuit intelligently selects the optimal. With this smart path selection technology, an average of 6% increase in the efficiency of both operations has been achieved.

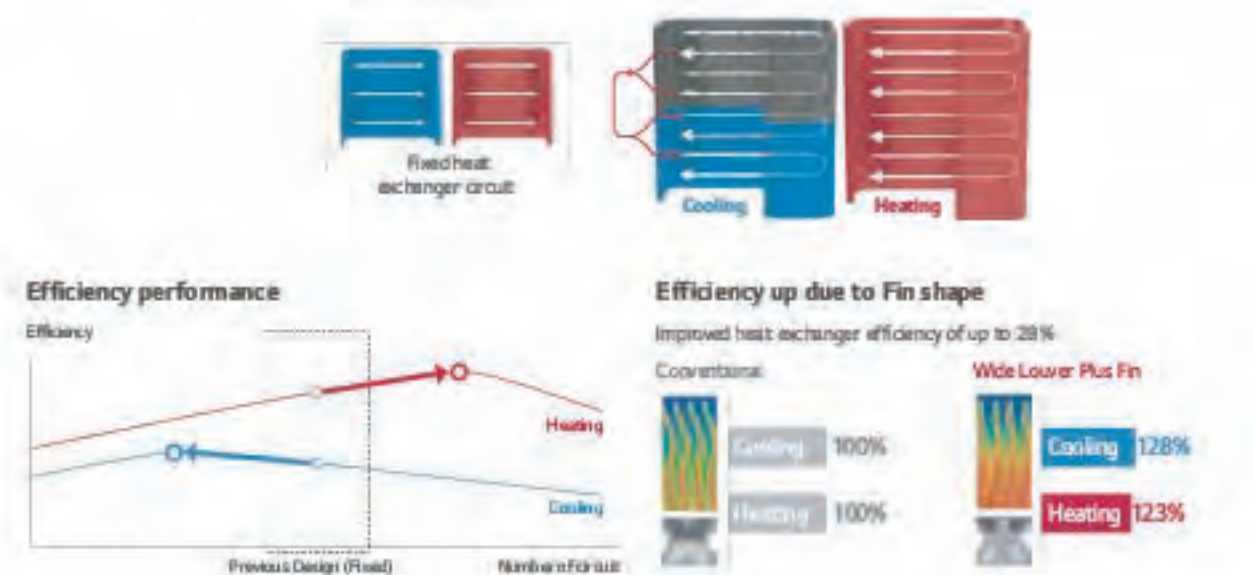

Reliable Refrigerant Components

LG technology allows for superior performance and component durability

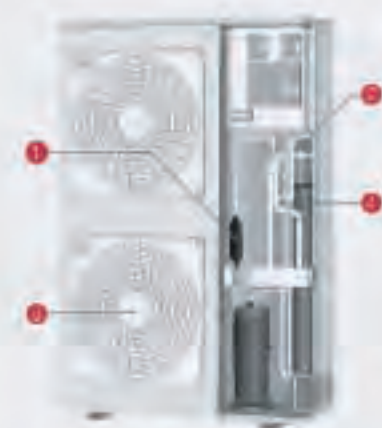


MULTI V S improved reliability with advanced technology:

- Oil separator
- Accumulator
- Sub-cooling


1 Cyclonic oil separator

- Highly reliable and efficient oil separation by centrifuge using cyclonic methods
- High collection efficiency as well as outstanding resistance to high temperature and pressure




2 Large Volume Accumulator

- Improved reliability by adopting the large volume accumulator (30% volume up compared to conventional)
- Prevents the liquid refrigerant entering the compressor suction
- Maximize efficiency by optimal amount of refrigerant
- Protects compressor breakdown to increase product lifetime




3 BLDC Fan Motor

- The BLDC Fan motor is more efficient than a conventional AC motor, offering an additional 4.0% energy savings at low speeds and 2.0% at high speeds.

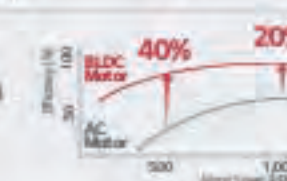

4 Double Sub-cool Interchanger

- Reliability is enhanced by minimizing pressure drop due to high efficiency spiral structure and 2 times larger size
- Long pipe is possible (up to *17.5m) and high elevation (up to *50m)
- Reduction of indoor refrigerant risk level
- *Based on maximum pipe length



Smart Control

Pressure control applied for smart, quick and precise response to user's temperature request

Temperature + Pressure Control

Senses and controls pressure directly using pressure sensor for faster and more exact response to load variation.



Quick Operating Response

Desired temperature can be reached up to 14% faster in cooling mode with pressure control, allowing more accurate control of indoor environment for maximized comfort.

* Specifications may vary by each model.



Corrosion Resistance Black Fin

Strong Durability against high salinity and heavily polluted air

Black Fin ensures continued operation of MULTI V S in highly corrosive environments like salt concentration in coastal towns or severe air pollution in industrial cities keeps. This improvement in durability prolongs the product's lifespan and lowers both the operational and maintenance costs.

Corrosion Resistance Proven by Certified Tests

LG Corrosion Resistance solution passed ISO 21207 accelerated corrosion test conducted by an independent test organization and the result has been certified by prestigious global certification organization, TÜV




Certified protection

- Verification of corrosion resistance performance
- Declared by TÜV Rheinland
- Test Method: ISO 21207
- Test condition: Salt contaminated condition + severe industrial / traffic environment (SO₂/SO_x)

Enhanced Coating Layers

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollution. Moreover, the hydrophilic film keeps water from accumulating on the heat exchanger's fin, minimizing moisture buildup and eventually making it even more corrosion resistant.



- **Hydrophilic film (Water flow)**
The Hydrophilic coating minimizes moisture buildup on the fin.
- **Acryl + Epoxy + Melamine resin (Corrosion resistant)**
The Black coating provides strong protection from corrosion.
- **Aluminum fin**

Sufficient Piping Length

Increased piping length allows for flexible design and installation

MULTI V S inverter technology and sub cooling control circuit technology allows greater piping length and outstanding elevation differences. A cooling system can be implemented more flexibly in a shop, office and even high-rise building, reducing the designer's work time and providing more efficient design.

Piping Capabilities



4 Way Piping


- Free design and installation by 4 way piping.



Low Noise Operation

Decreased noise during operation with low noise functionality

At night mode, noise reduced maximum 14% compared to normal mode

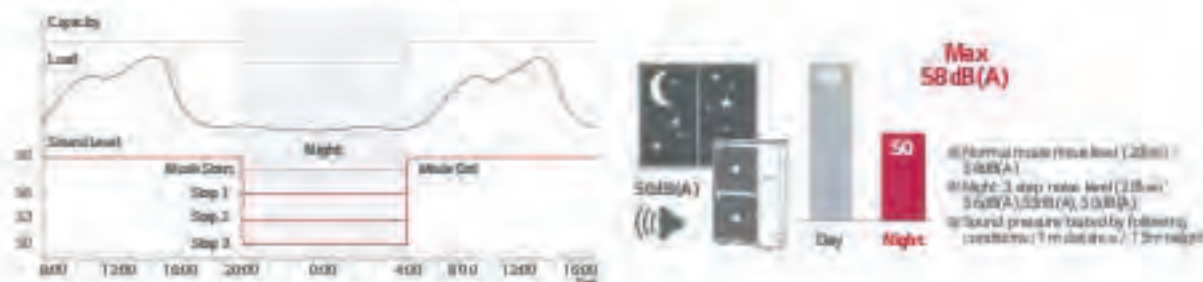

Fan Technology and RPM Control

External static pressure control for outdoor unit fan to adapt more flexibly to various installation conditions of outdoor unit

For enhanced efficiency, new axial fan boasts higher air volume, increased static pressure and decreased noise.

Fan Technology

The new axial fan has a mogul trailing edge, narrow hub blade and reverse hub, this provides a high efficiency, low noise, wide fan, as well as improving the air flow rate.



Super curtain fan increases the air volume by 50 CMM and the noise level is decreased by 4 dB(A).



Fan RPM control

Flow of air is straight due to fan shroud and fan RPM control even in high-rise building.




- Straight air flow
- New shroud adopted
- Performs high static pressure

Upgraded Fault Detection and Diagnosis

Easy and convenient maintenance with self-diagnosis

The inclusion of FDD elements - Auto start-up, auto refrigerant check, black box functionality, simultaneous evaluation, and auto refrigerant collection, provides the optimal solution for user reliability and ease of maintenance.

- Auto commissioning Mode
- Auto Refrigerant Collection
- Auto evaluation of refrigerant amount and charging
- Able to access LGMV (LG Monitoring View) by smartphone
- Black box function
- Piping & wiring error check-up

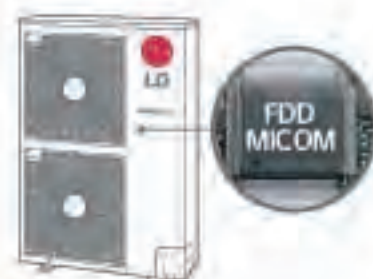

Nomenclature


ARUN	04	0G	SS	0	0	0
Model Type	Capacity	Compressor	Discharge Type	Electrical Rating	Total Cooling Capacity	Configuration
S: Standard L: Compact	4: 4HP 5: 5HP 6: 6HP	0: Standard 1: Inverter	S: Side Discharge	L: 3P, 3P+4.15V, 50Hz C: 1P, 220-240V, 50Hz	0: 0HP → 360, 1: 0HP → 100	0: Standard Cooling Only 1: Inverter and HTRV, Inverter and QD MULTI V System Outdoor Unit using R410A

Outdoor Units Function


Category	Function	Model Type
Key Refrigerant Components	Variable Path of Outdoor Unit HEX	-
	HPOR™ (High Pressure Oil Return)	-
	Humidity Sensor	ARUN040GSS4 only
	Corrosion Resistance Black Fin	-
Special Function	Oil Sensor	-
	Dual Sensing	ARUN040GSS4 only
	Low Noise Operation	-
	High Static Mode of Outdoor Unit Fan	-
Basic Function	Partial Defrosting	-
	Auto Dust Removal of Outdoor Unit (Fan reverse rotation)	-
	Indoor Cooling Comfort Mode Based Outdoor Temperature	-
	Smart Load Control (SLC) (Changing indoor discharge air temperature according to load)	-
	Outdoor Unit Control Refer to Humidity	ARUN040GSS4 only
	Defrost / Deicing	-
	High Pressure Switch	-
	Phase Protection	-
	Restart Delay (3-minutes)	-
	Self Diagnosis	-
Soft Start	-	
Central Controller	Test Run Function	-
	AC Ez (Simple Controller)	PCCS225050
	AC Ez Touch	RNCE2A000
	AC Smart IV	RNCS4B000
	AC Smart S	RNCSA000
	ACP (Advanced Control Platform) IV	RNCP4B000
	ACP (Advanced Control Platform) S	RNCPSA000
	AC Manager S	RNCSA000
	BNU (Building Network Unit)	ACP Lonworks: RNMAB000 ACP BACnet: RNPBR700
	IO Module (ODU Dry Contact)	RVD3M000
PDI (Power Distribution Indicator)	Standard	PPWDR000
	Premium	PPWDR1540
Cool / Heat Selector	PPDSE000	
Cycle Monitoring Device	LGMV	PRETLD
	Mobile LGMV	PLGMVW100
Additional Kit	Refrigerant Charging Kit	- (Legal operation) Not applied to ARUN040GSS4
	Low Ambient Kit	-
	Variable Water Flow Valve Control Kit	-

① Applied ② Not Applied

ARUN040GSS0

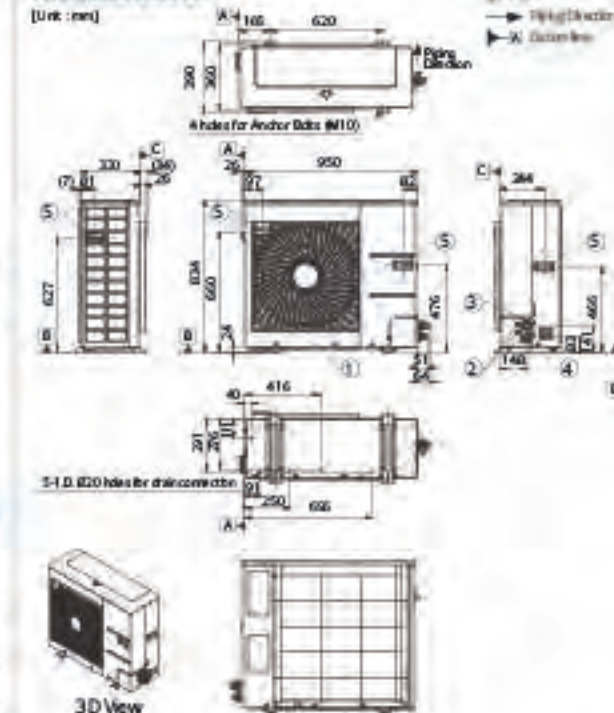


ARUN040BLS0

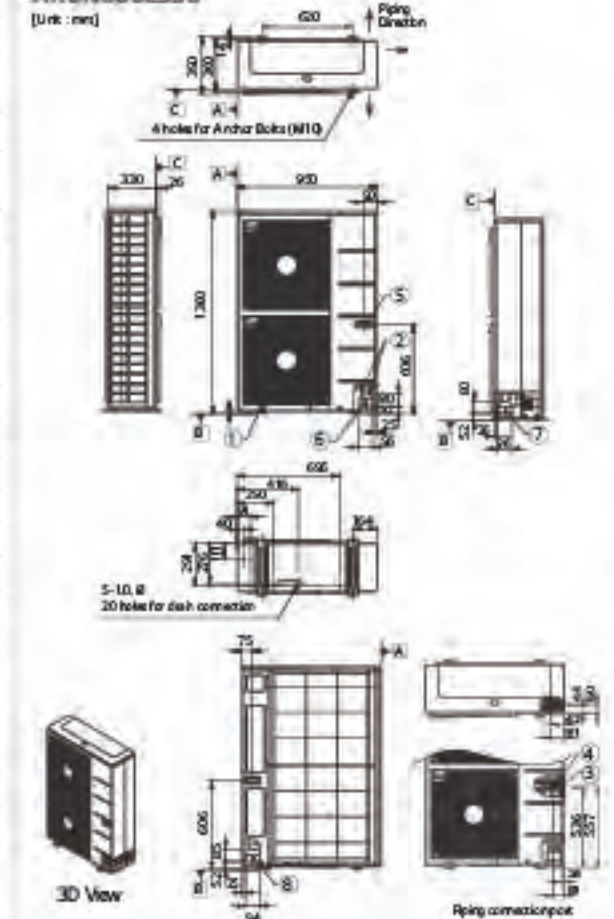


- Note:
1. Unit should be installed in compliance with the installation manual in the product box.
 2. Unit should be grounded in accordance with the local regulation or applicable code book.
 3. All electrical components and materials to be supplied from the site must comply with the local regulations or international codes.
 4. Electrical characteristics (cable) should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- | No. | Part Name | Description |
|-----|-----------------------|------------------------------|
| 1 | PE Cable | Ground connection cable (16) |
| 2 | Gas Pipe Connector | Working with Working Unit |
| 3 | Liquid Pipe Connector | Working with Working Unit |
| 4 | Flange | - |
| 5 | Pipe string (for Fan) | - |
| 6 | Discharge hole cap | - |
| 7 | Discharge hole cap | - |

Heat Pump

Cooling

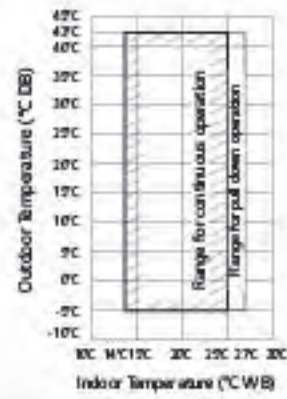


Heating

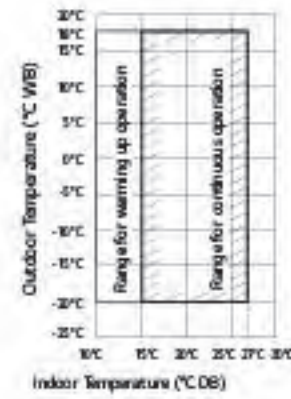


Heat Recovery

Cooling

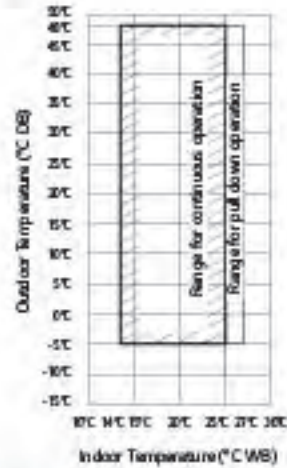


Heating

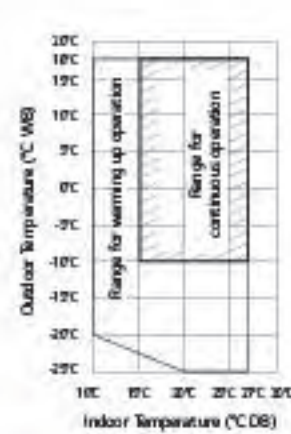

Simultaneous Cooling



Simultaneous Heating

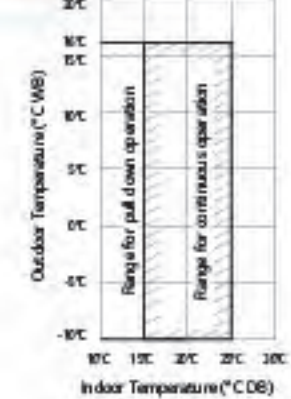

Note:
 1. These figures indicate the following operating condition: (Equipment length) 2.5m
 Level difference: 0m
 2. Range of pull-down operation: If the return humidity is too high, cooling capacity can be decreased by the gravity.

Position of Sound Level Measuring



Note:
 1. These figures indicate the following operating condition:
 Equipment length: 2.5m
 Level difference: 0m

ARUN040GSS0 / ARUN050GSL0



LG participates in the ECP program by ENERGY STAR program. Check ongoing validity of certification. www.energy-certification.com

4P			4	5
Model Name			ARUN040GSS0	ARUN050GSL0
Capacity	Cooling (Rated)	kW	12.1	14.0
	Heating (Rated)	kW	12.5	15.0
Input	Cooling (Rated)	kW	3.79	4.38
	Heating (Rated)	kW	2.10	2.63
EER			3.20	3.20
SEER			5.98	6.80
ODP	Rated Capacity		5.9	5.7
SCOP			5.15	4.96
Exterior	Color (General)		Warm Gray	Warm Gray
	RAL Code (Classic)		RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin
	Type		BLDC Inverter Twin Rotary	BLDC Inverter Twin Rotary
	Combination & No.		(Inverter) x 1	(Inverter) x 1
Compressor	Motor Output x Number	W x No.	4000 x 1	4000 x 1
	Oil Type		FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	1,300	1,300
Fan	Type		Axial Flow Fan	Axial Flow Fan
	Motor Output x Number	W x No.	124 x 1	124 x 1
	Air Flow Rate (High)	m³/min x No.	60 x 1	60 x 1
Pipe Connection	Discharge	Side / Top	Side	Side
	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Dimensions (W x H x D)		mm x No.	(950 x 834 x 330) x 1	(950 x 834 x 330) x 1
	Shipping	mm x No.	(1,065 x 918 x 461) x 1	(1,065 x 918 x 461) x 1
Net Weight	kg x No.	70 x 1	73 x 1	
Shipping Weight	kg x No.	77 x 1	81 x 1	
Sound Level	Cooling	dB(A)	50.0	52.0
	Heating	dB(A)	52.0	58.0
Sound Power Level	Cooling	dB(A)	72.0	72.0
	Heating	dB(A)	76.0	75.0
Communication Cable	mm² x No. (VCTF-5B)		1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A
	Precharge Amount in Factory	kg	1.8	2.4
	φ-CO ₂ eq.		3.758	5.010
	Control		Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	B, V, Hz		1, 220-240, 50	1, 220-240, 50
Number of Maximum Connectable Indoor Units			8	8*

* In case of ARUN050GSL0, maximum combination ratio is 1:100%
 Note:
 1. Equipment Size Selection: Type of indoor unit connected is only Ceiling Cassette (Dual).
 - Refer to EUROVENT certification regulation for more detail test condition.
 - Refer to EUROVENT website for the values connected Ceiling Cassette type indoor.
 2. Performance are based on the following condition:
 - Cooling Temperature: Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB / Outdoor: 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature: Indoor 20°C (68°F) DB / 15°C (59°F) WB / Outdoor: 7°C (44.6°F) DB / 6°C (42.8°F) WB
 3. The maximum combination ratio is 100% (the maximum combination ratio of ARUN050GSL0 is 1:100%).
 4. Wiring cable should comply with the applicable local and national codes.
 5. Due to our policy of innovation, some specifications may be changed without notification.
 6. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3744 standard. Therefore, these values can be increased using loudspeaker and other during operation.
 7. Power factor is 0.9 or less than 0.9 depending to the operating condition.
 8. This product complies with the RoHS Directive (2002/95/EC) and the WEEE Directive (2002/96/EC).

ARUN050GSS0 / ARUN060GSS0



LG participates in the ECP programme for Euronorm VRF program. Check ongoing validity of certification: www.euronorm-certification.com

HP			5	6
Model Name			ARUN050GSS0	ARUN060GSS0
Capacity	Cooling (Rated)	kW	14.0	15.5
	Heating (Rated)	kW	16.0	18.0
	Cooling (Rated)	kW	3.33	3.97
Input	Heating (Rated)	kW	2.77	3.40
EER			4.20	3.90
SEER			6.56	6.65
COP	Rated Capacity		5.77	5.30
SCOP			5.23	5.19
Exterior	Color (General)		Warm Gray	Warm Gray
	RAL Code (Classic)		RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin
	Type		BLDC Inverter Twin Rotary	BLDC Inverter Twin Rotary
	Combination x No.		(Inverter) x 1	(Inverter) x 1
Compressor	Motor Output x Number	W x No.	4,000 x 1	4,000 x 1
	Oil Type		FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	1,300	1,300
Fan	Type		Axial Flow Fan	Axial Flow Fan
	Motor Output x Number	W x No.	124 x 2	124 x 2
	Air Flow Rate (High)	m ³ /min x No.	110 x 1	110 x 1
	Drive		DC INVERTER	DC INVERTER
	Discharge	Side / Top	Side	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Dimensions (W x H x D)		mm x No.	(950 x 1,380 x 330) x 1	(950 x 1,380 x 330) x 1
Dimensions (W x H x D) - Shipping		mm x No.	(1,140 x 1,462 x 461) x 1	(1,140 x 1,462 x 461) x 1
Net Weight		kg x No.	94 x 1	94 x 1
Shipping Weight		kg x No.	106 x 1	106 x 1
Sound Pressure Level	Cooling	dB(A)	51.0	52.0
	Heating	dB(A)	53.0	54.0
Sound Power Level	Cooling	dB(A)	72.0	72.0
	Heating	dB(A)	76.0	77.0
Communication Cable		mm ² x No. (VCTF-5B)	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A
	Precharged Amount in factory	kg	3.0	3.0
	t-CO ₂ eq		6.263	6.263
	Control		Electronic Expansion Valve	Electronic Expansion Valve
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Number of Maximum Connectable Indoor Units			10	13

- Note
1. (General Use Condition): Type of indoor unit connected is only Ceiling Cassette Unit.
 - Refer to Euronorm certification regulation for more detail test conditions.
 - Refer to Euronorm website for test values connected Ceiling Cassette type indoor.
 2. Performance are based on the following conditions:
 - Cooling Temperature: Indoor 27°C (80°F) DB / 19°C (66.2°F) WB / Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature: Indoor 20°C (68°F) DB / 13°C (55°F) WB / Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 3. The maximum combination ratio is 1.60% (the maximum combination ratio of ARUN050GSS0 is 13.0%).
 4. Wiring cable size must comply with the applicable local and national codes.
 5. Due to our policy of innovation some specifications may be changed without notification.
 6. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3746 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 7. Power factor could vary less than ±1% according to the operating conditions.
 8. The product contains fluorinated greenhouse gases (R410A, GWP(global warming potential) = 20875).

ARUN040LSS0 / ARUN050LSS0
ARUN060LSS0



LG participates in the ECP programme for Euronorm VRF program. Check ongoing validity of certification: www.euronorm-certification.com

HP			4	5	6
Model Name			ARUN040LSS0	ARUN050LSS0	ARUN060LSS0
Capacity	Cooling (Rated)	kW	12.1	14.0	15.5
	Heating (Rated)	kW	12.5	16.0	18.0
	Cooling (Rated)	kW	2.37	3.33	3.97
Input	Heating (Rated)	kW	1.93	2.77	3.40
EER			5.10	4.20	3.90
SEER			6.46	6.56	6.65
COP	Rated Capacity		6.49	5.77	5.30
SCOP			5.02	5.23	5.19
Exterior	Color (General)		Warm Gray	Warm Gray	Warm Gray
	RAL Code (Classic)		RAL 7044	RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin
	Type		BLDC Inverter Twin Rotary	BLDC Inverter Twin Rotary	BLDC Inverter Twin Rotary
	Combination x No.		(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
Compressor	Motor Output x Number	W x No.	4,000 x 1	4,000 x 1	4,000 x 1
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	1,300	1,300	1,300
Fan	Type		Axial Flow Fan	Axial Flow Fan	Axial Flow Fan
	Motor Output x Number	W x No.	124 x 2	124 x 2	124 x 2
	Air Flow Rate (High)	m ³ /min x No.	110 x 1	110 x 1	110 x 1
	Drive		DC INVERTER	DC INVERTER	DC INVERTER
	Discharge	Side / Top	Side	Side	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Dimensions (W x H x D)		mm x No.	(950 x 1,380 x 330) x 1	(950 x 1,380 x 330) x 1	(950 x 1,380 x 330) x 1
Dimensions (W x H x D) - Shipping		mm x No.	(1,140 x 1,462 x 461) x 1	(1,140 x 1,462 x 461) x 1	(1,140 x 1,462 x 461) x 1
Net Weight		kg x No.	96 x 1	96 x 1	96 x 1
Shipping Weight		kg x No.	108 x 1	106 x 1	106 x 1
Sound Pressure Level	Cooling	dB(A)	50.0	51.0	52.0
	Heating	dB(A)	52.0	53.0	54.0
Sound Power Level	Cooling	dB(A)	72.0	72.0	72.0
	Heating	dB(A)	76.0	76.0	77.0
Communication Cable		mm ² x No. (VCTF-5B)	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in factory	kg	3.0	3.0	3.0
	t-CO ₂ eq		6.263	6.263	6.263
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply		Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units			8	10	13

- Note
1. (General Use Condition): Type of indoor unit connected is only Ceiling Cassette Unit.
 - Refer to Euronorm certification regulation for more detail test conditions.
 - Refer to Euronorm website for test values connected Ceiling Cassette type indoor.
 2. Performance are based on the following conditions:
 - Cooling Temperature: Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB / Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature: Indoor 20°C (68°F) DB / 13°C (55°F) WB / Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 3. The maximum combination ratio is 1.60% (the maximum combination ratio of ARUN050LSS0 is 13.0%).
 4. Wiring cable size must comply with the applicable local and national codes.
 5. Due to our policy of innovation some specifications may be changed without notification.
 6. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3746 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 7. Power factor could vary less than ±1% according to the operating conditions.
 8. The product contains fluorinated greenhouse gases (R410A, GWP(global warming potential) = 20875).

ARUN080LSS0 / ARUN100LSS0
ARUN120LSS0



It participates in the ECP program for EUROVENT WP program. Check ongoing validity of certification www.eurovent-certification.com

HP			8	10	12
Model Name			ARUN080LSS0	ARUN100LSS0	ARUN120LSS0
Capacity	Cooling (Rated)	kW	22.4	28.0	33.5
	Heating (Rated)	kW	24.5	30.6	36.7
	Cooling (Rated)	kW	8.30	8.75	14.00
Input	Heating (Rated)	kW	6.62	8.12	7.46
EER			2.70	3.20	2.40
SEER			6.03	6.59	5.72
COP	Rated Capacity		3.70	3.77	4.92
SCOP			4.33	4.17	3.86
Exterior	Color (General)		Warm Gray	Warm Gray	Warm Gray
	RAL Code (Classic), General		RAL 7044	RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Back Fin	Wide Louver Plus / Back Fin	Wide Louver Plus / Back Fin
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Combination x No.		(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
Compressor	Motor Output x Number	W x No.	4,200 x 1	5,300 x 1	5,300 x 1
	Oil Type		PVC680 (PVE)	FV0680 (PVE)	FV0680 (PVE)
	Oil Charge	cc	2,400	2,600	3,400
Fan	Type		Propeller fan	Propeller fan	Propeller fan
	Motor Output x Number	W x No.	124 x 2	250 x 2	250 x 2
	Air Flow Rate (High)	m³/min x No.	140 x 1	190 x 1	190 x 1
	Drive		DC INVERTER	DC INVERTER	DC INVERTER
	Discharge	Side / Top	Side	Side	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø12.7 (1/2)
	Gas Pipe	mm (inch)	Ø19.05 (3/4)	Ø21.2 (7/8)	Ø25.5 (1-1/8)
Dimensions (W x H x D)	mm x No.	(950 x 1,380 x 330) x 1	(1,090 x 1,625 x 380) x 1	(1,090 x 1,625 x 380) x 1	
Dimensions (W x H x D) - Shipping	mm x No.	(1,140 x 1,462 x 461) x 1	(1,215 x 1,795 x 500) x 1	(1,215 x 1,795 x 500) x 1	
Net Weight	kg x No.	115 x 1	144 x 1	157 x 1	
Shipping Weight	kg x No.	127 x 1	160 x 1	173 x 1	
Sound Pressure Level	Cooling	dB(A)	57.0	58.0	60.0
	Heating	dB(A)	57.0	58.0	60.0
	Cooling	dB(A)	81.0	80.0	81.0
	Heating	dB(A)	84.0	84.0	85.0
Communication Cable	mm² x No. (VCTF-SB)		1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	3.5	4.5	6.0
	i-CO ₂ eq		7.306	9.394	12.525
Control			Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units			13	16	20

- Note:
1. Eurovent Test Condition: Type of indoor unit connected is only Ceiling Cassette Duct. Refer to EUROVENT certification regulation for more detail test condition. Refer to EUROVENT website for test value connected Ceiling Cassette type indoor.
 2. Performance are based on the following conditions:
 - Cooling Temperature: Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB / Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature: Indoor 20°C (68°F) DB / 15°C (59°F) WB / Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 3. The maximum compressor ratio is 16.0% (the maximum compressor ratio of ARUN080LSS0 is 1.30%).
 4. Wiring cable size must comply with the applicable local and national code.
 5. Due to our policy of innovation some specifications may be changed without notification.
 6. Sound pressure level is measured on the rated condition in the anechoic chamber (ISO 3745 standard). Sound power level is measured on the rated condition in the reverberation room (ISO 3741 standard). Therefore, these values can be increased owing to ambient conditions during operation.
 7. Power factor could vary less than ±1% according to the operating conditions.
 8. The product conforms Flammable gas (A2L), GWP (Global warming potential) = 2087.5.

ARUB060GSS4



It participates in the ECP program for EUROVENT WP program. Check ongoing validity of certification www.eurovent-certification.com

HP			6
Model Name			ARUB060GSS4
Capacity	Cooling (Rated)	kW	15.5
	Heating (Rated)	kW	18.0
	Cooling (Rated)	kW	3.83
Input	Heating (Rated)	kW	3.64
EER			4.05
SEER			6.84
COP	Rated Capacity		4.94
SCOP			4.38
Exterior	Color		Warm Gray
	RAL Code (Classic)		RAL 7044
Heat Exchanger	Type		Wide Louver Plus
	Type		Hermetically Sealed Scroll
	Combination x No.		(Inverter) x 1
Compressor	Motor Output x Number	W x No.	4,200 x 1
	Oil Type		PVC680 (PVE)
	Oil Charge	cc	1,700
Fan	Type		Axial Flow Fan
	Motor Output x Number	W x No.	124 x 2
	Air Flow Rate (High)	m³/min x No.	110 x 1
	Drive		DC INVERTER
	Discharge	Side / Top	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø19.05 (3/4)
Dimensions (W x H x D)	mm x No.		(950 x 1,380 x 330) x 1
	Dimensions (W x H x D) - shipping	mm x No.	(1,140 x 1,549 x 465) x 1
Net Weight	kg x No.		118 x 1
Shipping Weight	kg x No.		132 x 1
Sound Pressure Level	Cooling	dB(A)	58
	Heating	dB(A)	58
	Cooling	dB(A)	89
	Heating	dB(A)	71
Communication Cable	mm² x No. (VCTF-SB)		1.0 - 1.5 x 2C
Refrigerant	Refrigerant Name		R410A
	Precharged Amount in Factory	kg	3.5
	i-CO ₂ eq		7.306
Control			Electronic Expansion Valve
Power Supply	Ø, V, Hz		1, 220-240, 50
Number of Maximum Connectable Indoor Units			13


- Note:
1. Eurovent Test Condition: Type of indoor unit connected is only Ceiling Cassette Duct. Refer to EUROVENT certification regulation for more detail test condition. Refer to EUROVENT website for test value connected Ceiling Cassette type indoor.
 2. Performance are based on the following conditions:
 - Cooling Temperature: Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB / Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature: Indoor 20°C (68°F) DB / 15°C (59°F) WB / Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 3. The maximum compressor ratio is 16.0% (the maximum compressor ratio of ARUB060GSS4 is 1.30%).
 4. Wiring cable size must comply with the applicable local and national code.
 5. Due to our policy of innovation some specifications may be changed without notification.
 6. Sound pressure level is measured on the rated condition in the anechoic chamber (ISO 3745 standard). Sound power level is measured on the rated condition in the reverberation room (ISO 3741 standard). Therefore, these values can be increased owing to ambient conditions during operation.
 7. Power factor could vary less than ±1% according to the operating conditions.
 8. The product conforms Flammable gas (A2L), GWP (Global warming potential) = 2087.5.

Energy Savings

Energy consumption can be reduced as indoor heat is absorbed and transferred to hot water supply.

Conventional

Absorbed heat is released to outdoor air.

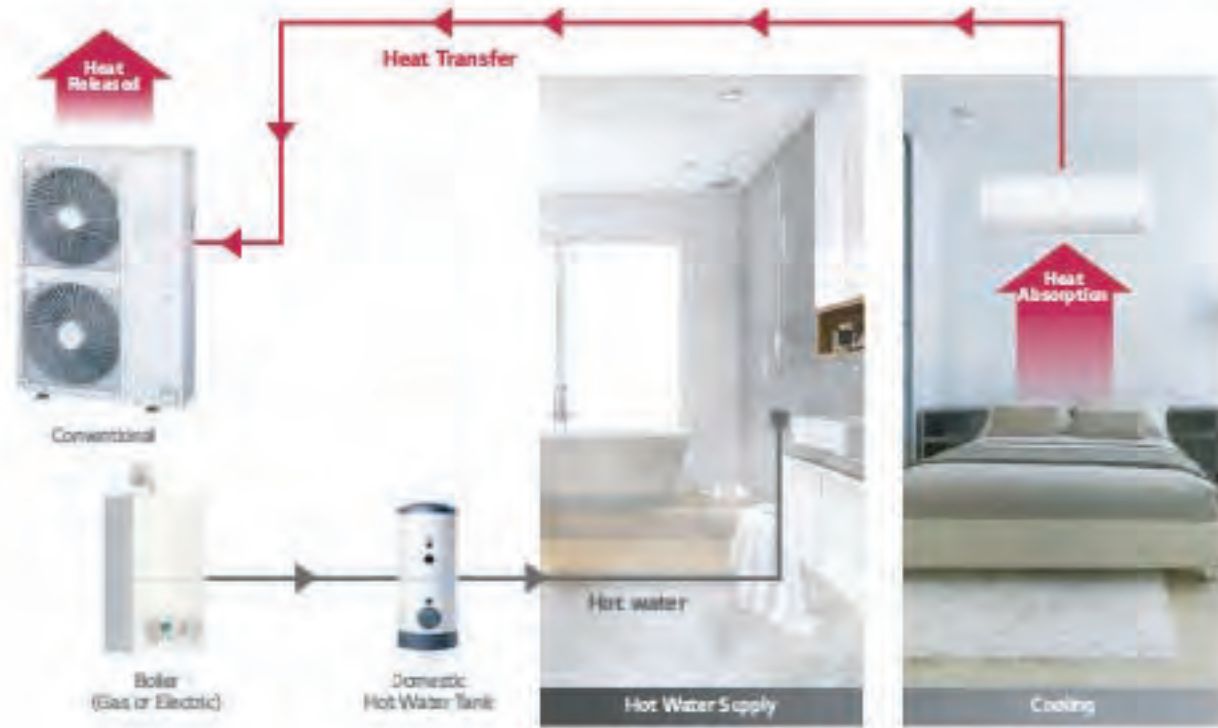

Energy Savings

Energy consumption can be reduced as indoor heat is absorbed and transferred to hot water supply.

MULTI V S Heat Recovery with HYDRO KIT

Absorbed heat from indoor space is used for making hot water.



MULTI V™ S R32

- Air cooled VRF Heat pump
- 1.21 - 15.5kW (Cooling capacity based)
- Both 1Ø, 220 - 240V, 50Hz and 3Ø, 380 - 415V, 50Hz
- Side discharge outdoor unit



Higher Efficiency

LG Multi V S achieved high efficiency through technology of biomimetic fan and revolutionary scroll compressor.

EER 3.65
COP 4.10

VS



Superior to competitor's

EER 4.20
COP 5.15

EER 15% ↑ COP 25% ↑

※ The values based on S1FP model


Lower Global Warming Potential (GWP)

What is GWP?

Global Warming Potential is a measure that allows for an accurate comparison of the environmental impact of different gases. GWP measures how much energy the emissions of 1 ton of a gas will absorb over a given period of time, relative to the emissions of 1 ton of carbon dioxide (CO₂).



Global Trend and EU Regulation for F-Gas

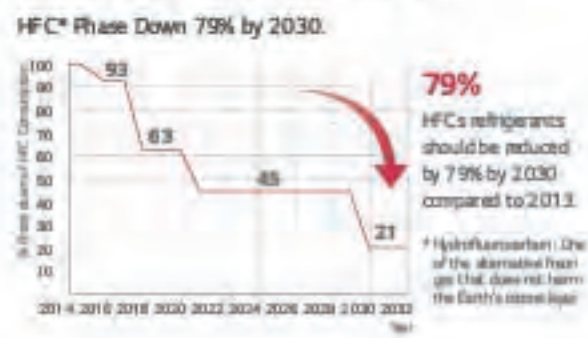

Cost Savings with R32

- Higher Efficiency**
Savings on cost of energy consumption.
- Reduced Equipment Sizes**
Savings on product purchase and labor cost for installation and maintenance.
- Less Refrigerant Charge**
Savings on cost of injecting & replacing refrigerant.
- Less Refrigerant Charge**
Savings on cost of injecting & replacing refrigerant.




Compact Size & Light Weight

Its compact size and light weight make it easy to install and optimize space. (5/6HP)



Less Refrigerant Charge

LG reduced refrigerant charge by applying environment-conscious refrigerant R32.

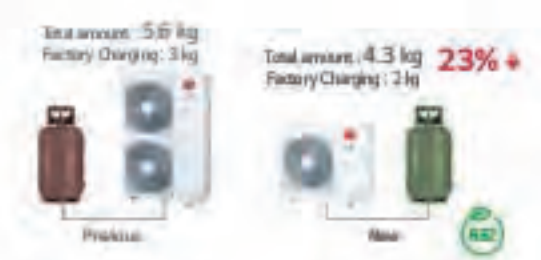

※ EU (SMA Mounted Unit) 5/6HP (1/2) ※ The result varies, differs depending on actual environment.

Corrosion Resistance Black Fin

Enhanced Coating Layers

The black coating with enhanced epoxy resin is applied for strong protection from various corrosive external conditions such as salt contamination and air pollutants. Moreover, the hydrophilic film keeps water from accumulating on the heat exchanger's fins, minimizing moisture buildup and eventually making it even more corrosion resistant.



- Hydrophilic film (Water flow)**
The Hydrophilic coating minimize moisture buildup on the fin.
- Acryl + Epoxy + Melamine resin (Corrosion resistant)**
The black coating provides strong protection from corrosion.
- Aluminum fin**

ZRUN040GSS0 / ZRUN050GSS0
ZRUN060GSS0



LG participates in the ECP program for EUROVENT program. Check ongoing validity of certification: www.eurovent-certification.com

HP			4	5	6
Model Name			ZRUN040GSS0	ZRUN050GSS0	ZRUN060GSS0
Capacity	Cooling (Rated)	kW	12.1	14.0	15.5
	Heating (Rated)	kW	12.1	14.0	15.5
	Heating (Max)	kW	14.2	16.0	18.0
Input	Cooling (Rated)	kW	3.43	3.33	3.97
	Heating (Rated)	kW	2.30	2.72	3.23
	Heating (Max)	kW	2.93	3.48	4.29
EER (Rated)			3.53	4.20	3.90
SEER			8.10	8.70	8.50
COP (Rated)			5.26	5.15	4.80
COP (Max)			4.84	4.60	4.20
SCOP			4.70	4.80	5.00
Exterior	Color		Warm Gray	Warm Gray	Warm Gray
	RAL Code		RAL 7044	RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin
	Type		LG Inverter Scroll (R1)	LG Inverter Scroll (R1)	LG Inverter Scroll (R1)
Compressor	Combination x No.		(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
	Motor Output x Number	W x No.	3,198 x 1	3,198 x 1	3,198 x 1
	Oil Type		PW680	PW680	PW680
	Oil Charge	cc	1,100	1,100	1,100
	Type		Axial Flow Fan	Axial Flow Fan	Axial Flow Fan
Fan	Motor Output x Number	W x No.	124 x 1	200 x 1	200 x 1
	Air Flow Rate (High)	m ³ /min x No.	80 x 1	80 x 1	80 x 1
	Drive		DC INVERTER	DC INVERTER	DC INVERTER
	Discharge	Side / Top	Side	Side	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.05 (3/4)
Dimensions (W x H x D)		mm x No.	(950 x 834 x 330) x 1	(950 x 834 x 330) x 1	(950 x 834 x 330) x 1
Dimensions (W x H x D) - Shipping		mm x No.	(1,147 x 919 x 461) x 1	(1,147 x 919 x 461) x 1	(1,147 x 919 x 461) x 1
Net Weight		kg x No.	64.7 x 1	71.6 x 1	71.6 x 1
Shipping Weight		kg x No.	73.7 x 1	79.6 x 1	79.6 x 1
Sound Pressure Level	Cooling	dB(A)	50	51	52
	Heating	dB(A)	52	53	54
Sound Power Level	Cooling	dB(A)	67	70	71
	Heating	dB(A)	71	74	75
Communication Cable		mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Refrigerant	Refrigerant name		R32	R32	R32
	Precharged Amount	kg	1.5	2.0	2.0
	s-CO ₂ e		1.010	1.350	1.350
Control			Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply		Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Number of maximum connectable indoor units			8	10	13

Note:
 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Equally the power cable and circuit breaker should be selected in accordance with this.
 3. Sound pressure level is measured on the rated condition in the electric room by ISO 3745 standard. Sound power level is measured on the rated condition in the electric room by ISO 3747 standard. Therefore, these values can be increased owing to various conditions during operation.
 4. Performance are based on the following conditions:
 - Cooling: Indoor Ambient Temp: 27°CDB / 19°CWB, Outdoor Ambient Temp: 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp: 20°CDB / 15°CWB, Outdoor Ambient Temp: 7°CDB / 6°CWB
 - Interconnected Pipe Length: 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m.
 5. EUROVENT Test Condition.
 - Performance values on the type PDB are based on Cooling mounted capacity combination.
 - Refer to EUROVENT web site (www.eurovent-certification.com) for other indoor unit combination and more detail test conditions.
 6. The maximum operational ratio is 100%.
 7. This product contains fluorine gas (R32, GWP Global warming potential = 675).

ZRUN040LSS0 / ZRUN050LSS0
ZRUN060LSS0



LG participates in the ECP program for EUROVENT program. Check ongoing validity of certification: www.eurovent-certification.com

HP			4	5	6
Model Name			ZRUN040LSS0	ZRUN050LSS0	ZRUN060LSS0
Capacity	Cooling (Rated)	kW	12.1	14.0	15.5
	Heating (Rated)	kW	12.1	14.0	15.5
	Heating (Max)	kW	14.2	16.0	18.0
Input	Cooling (Rated)	kW	3.43	3.33	3.97
	Heating (Rated)	kW	2.30	2.72	3.23
	Heating (Max)	kW	2.93	3.48	4.29
EER (Rated)			3.53	4.20	3.90
SEER			8.10	8.70	8.50
COP (Rated)			5.26	5.15	4.80
COP (Max)			4.84	4.60	4.20
SCOP			4.70	4.80	5.00
Exterior	Color		Warm Gray	Warm Gray	Warm Gray
	RAL Code		RAL 7044	RAL 7044	RAL 7044
Heat Exchanger	Type		Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin	Wide Louver Plus / Black Fin
	Type		LG Inverter Scroll (R1)	LG Inverter Scroll (R1)	LG Inverter Scroll (R1)
Compressor	Combination x No.		(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
	Motor Output x Number	W x No.	3,198 x 1	3,198 x 1	3,198 x 1
	Oil Type		PW680	PW680	PW680
	Oil Charge	cc	1,100	1,100	1,100
	Type		Axial Flow Fan	Axial Flow Fan	Axial Flow Fan
Fan	Motor Output x Number	W x No.	124 x 1	200 x 1	200 x 1
	Air Flow Rate (High)	m ³ /min x No.	80 x 1	80 x 1	80 x 1
	Drive		DC INVERTER	DC INVERTER	DC INVERTER
	Discharge	Side / Top	Side	Side	Side
Pipe Connection	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.05 (3/4)
Dimensions (W x H x D)		mm x No.	(950 x 834 x 330) x 1	(950 x 834 x 330) x 1	(950 x 834 x 330) x 1
Dimensions (W x H x D) - Shipping		mm x No.	(1,147 x 919 x 461) x 1	(1,147 x 919 x 461) x 1	(1,147 x 919 x 461) x 1
Net Weight		kg x No.	64.7 x 1	71.6 x 1	71.6 x 1
Shipping Weight		kg x No.	73.7 x 1	79.6 x 1	79.6 x 1
Sound Pressure Level	Cooling	dB(A)	51	57	57
	Heating	dB(A)	55	60	60
Sound Power Level	Cooling	dB(A)	67	70	71
	Heating	dB(A)	71	74	75
Communication Cable		mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Refrigerant	Refrigerant name		R32	R32	R32
	Precharged Amount	kg	1.5	2.0	2.0
	s-CO ₂ e		1.013	1.350	1.350
Control			Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply		Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of maximum connectable indoor units			8	10	13

Note:
 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Equally the power cable and circuit breaker should be selected in accordance with this.
 3. Sound pressure level is measured on the rated condition in the electric room by ISO 3745 standard. Sound power level is measured on the rated condition in the electric room by ISO 3747 standard. Therefore, these values can be increased owing to various conditions during operation.
 4. Performance are based on the following conditions:
 - Cooling: Indoor Ambient Temp: 27°CDB / 19°CWB, Outdoor Ambient Temp: 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp: 20°CDB / 15°CWB, Outdoor Ambient Temp: 7°CDB / 6°CWB
 - Interconnected Pipe Length: 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m.
 5. EUROVENT Test Condition.
 - Performance values on the type PDB are based on Cooling mounted capacity combination.
 - Refer to EUROVENT web site (www.eurovent-certification.com) for other indoor unit combination and more detail test conditions.
 6. The maximum operational ratio is 100%.
 7. This product contains fluorine gas (R32, GWP Global warming potential = 675).

MULTI V™ M

Highlight

- Air Cooled VRF Heat Pump
- 14kW (Cooling capacity based)
- 3Ø, 380 - 415V, 50Hz (Compressor Module)
- 1Ø, 220 - 240V, 50Hz (Heat Exchanger Module)
- Outdoor unit is installed inside building



Flexible design



Cost savings



Space savings



Easy maintenance




OUTDOOR UNITS

How does it work?

Direct Inlet / Outlet Case



Duct Connected Case

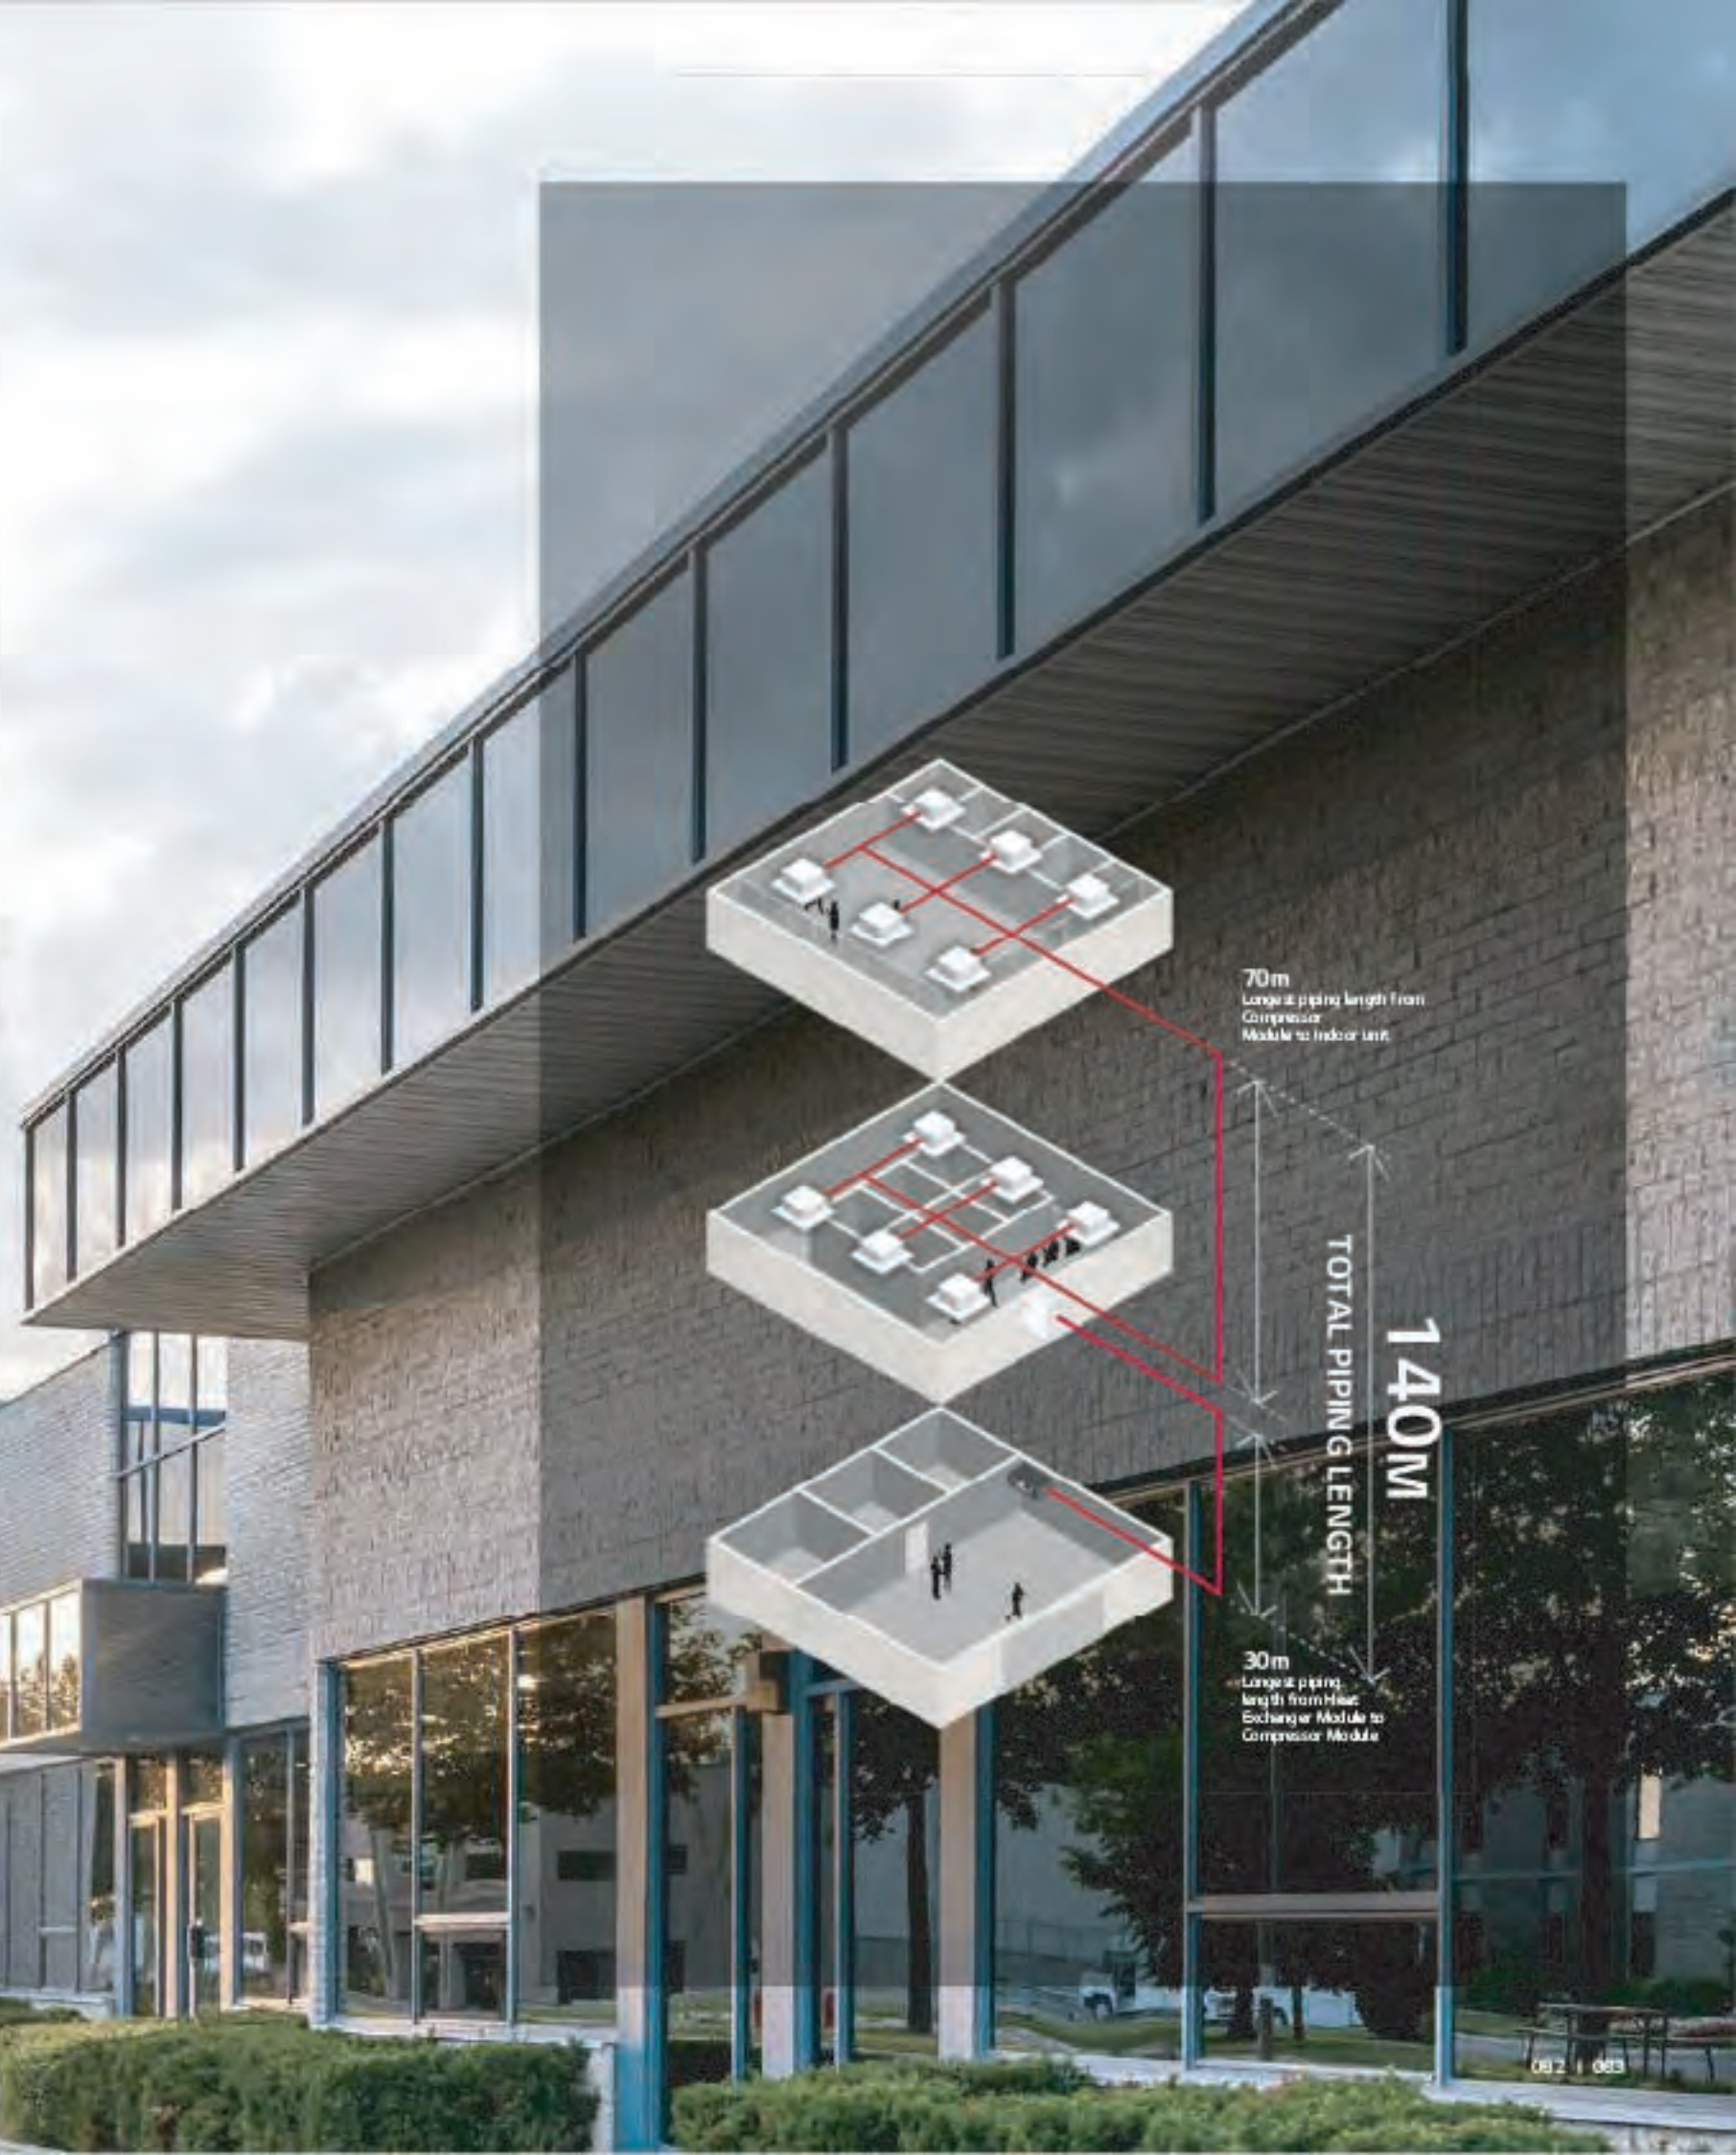


70m
Longest piping length from
Compressor
Module to Indoor unit

TOTAL PIPING LENGTH

140M


30m
Longest piping
length from Heat
Exchanger Module to
Compressor Module

Energy Efficiency

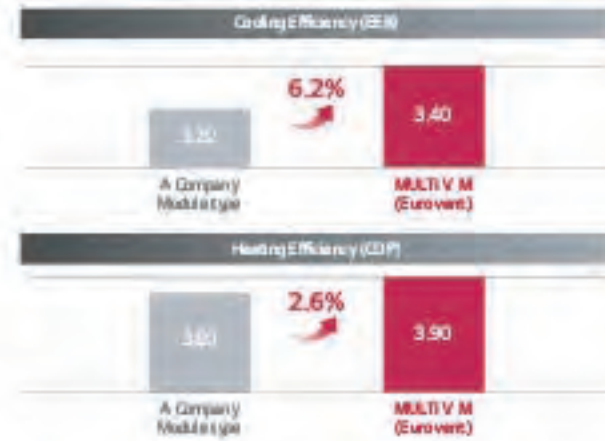

R1 Compressor™

MULTI V M ensures world-class efficiency with innovative technology including R1 Compressor.

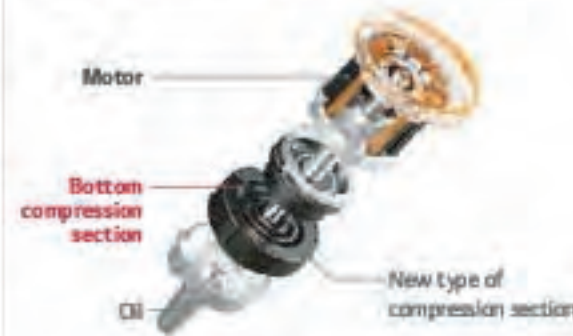


Wide Louver Plus Fin + Corrosion Resistance

Wide Louver Plus fin technology increases efficiency and heating performance compared to conventional fin.



Smart Load Control

To save operation energy consumption, automatically controls the refrigerant temperature according to outdoor temperature.

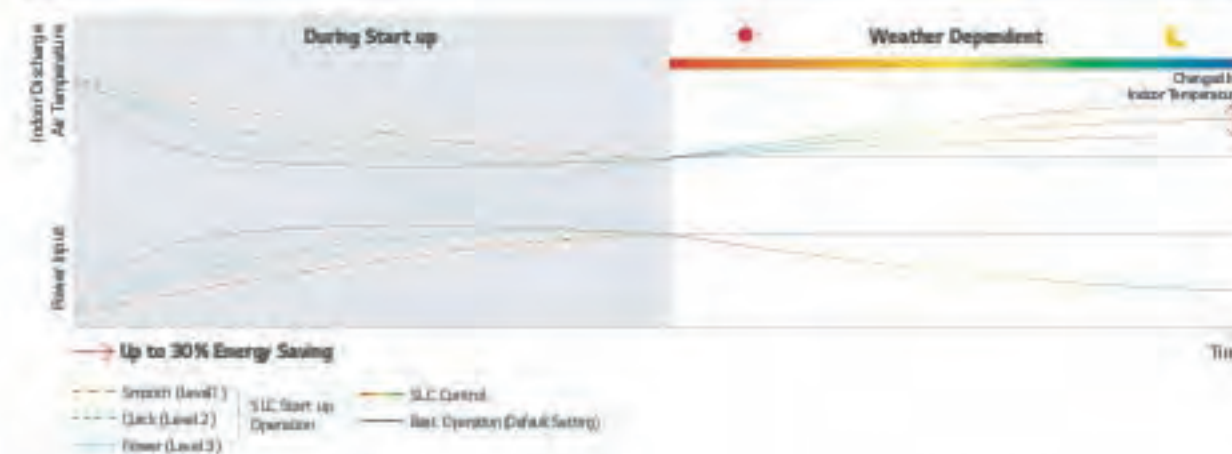

Quiet Operation

Low sound level of both compressor module and heat exchanger module allows outdoor units to be installed and operated inside.




Regulatory Compliance




Volume

Compressor Module

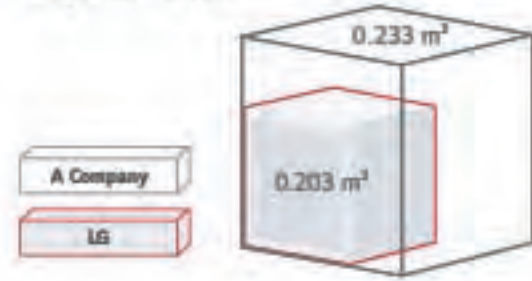

Heat Exchanger Module

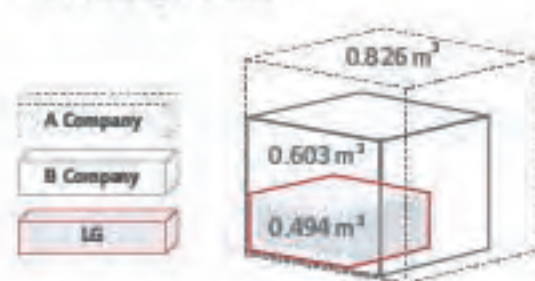


ESP Control (External Static Pressure)

up to 30 Pa




up to 157 Pa (max)

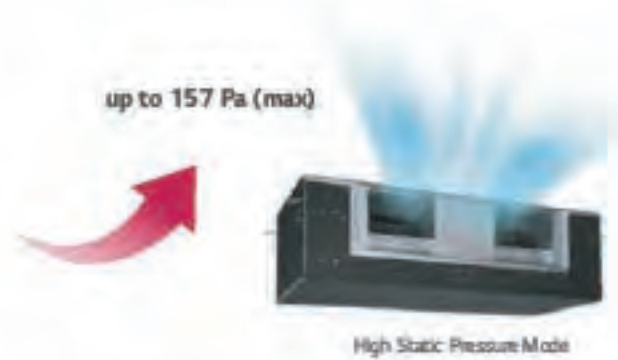

Module Type

Increased design freedom

- Additional structure installation and ceiling construction not required
- Ease of service
- Compressor replacement
- Low noise with module
- Ease of service (Replacement of the comp)
- Low noise by module (vs integrated type)

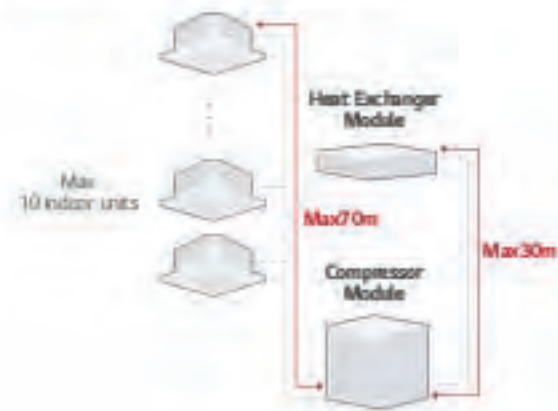

Flexible Piping Location

Tidy & simple installation with flexible piping location.



Increased Design Freedom

Additional structure installation nor ceiling construction is required, making compressor replacement and general maintenance easier. Split module provides low noise operation compared to integrated type.



Conventional Outdoor Unit



MULTI V. M

Heat exchanger module can be installed in false ceiling spaces

Compressor module can be installed anywhere indoors



ARUN050LMCO / ARUN050GMEO



LG participates in the ECP program for EUROVENT WIF program. Check ongoing validity of certification: www.eco-partnership.com

System

HP		S	
Model Name	Set	ARUN050MSO	
	Compressor Module	ARUN050LMCO	
	Heat Exchanger Module	ARUN050GMEO	
Capacity	Cooling (Rated)	kW	14.0
	Heating (Rated)	kW	14.0
	Heating (Max)	kW	16.0
Input	Cooling (Rated)	kW	4.12
	Heating (Rated)	kW	3.59
	Heating (Max)	kW	4.32
EER	Based on Rated Capacity		3.40
SEER			7.03
COP	Based on Rated Capacity		3.90
	Based on Max Capacity		3.70
SCOP			4.12
Number of Maximum Connectable Indoor Units			10

W: Applied, -: Not Applied

Note

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with this.
- Power factor could vary less than ±1% according to the operating conditions.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic rooms by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Performances are based on the following conditions:
 - Cooling: Indoor Ambient Temp: 27°CDB / 19°CWB, Outdoor Ambient Temp: 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp: 20°CDB / 15°CWB, Outdoor Ambient Temp: 7°CDB / 0°CWB
 - Interconnected Pipe Length and Difference of Elevation: - Heat Exchanger Module - Compressor Module = 5m
 - Compressor Module - Indoor Unit = 7.5m
 - Difference of Elevation (Heat Exchanger Module - Compressor Module - Indoor Unit) is Zero
- The maximum condensation rate is 1.32%.
- The product contains Fluorinated greenhouse gases (R410A, GWP (Global warming potential) = 20875)

ARUN050LMCO / ARUN050GMEO



LG participates in the ECP program for EUROVENT WIF program. Check ongoing validity of certification: www.eco-partnership.com

Module

HP		S	
Model Name		Compressor Module	Heat Exchanger Module
		ARUN050LMCO	ARUN050GMEO
Exterior	Color	Morning Gray	
	RAL Code (Classic)	RAL 7030	
Dimensions (W x H x D)	Net	mm x No.	580 x 700 x 500
	Shipping	mm x No.	818 x 833 x 564
Weight	Net	kg x No.	69 x 1
	Shipping	kg x No.	78 x 1
Compressor	Type	Hermetic Motor Compressor	
	Combination x No.	(Inverter) x 1	
	Motor Output	W x No.	3,200
Heat Exchanger	Oil Type	FVC680 (PVE)	
	Oil Charge	cc	1,300
Fan	Type	Wide Lower Fin / Black Fin	
	Motor Output x Number	W x No.	400 x 2
Exterior Static Pressure	Air Flow Rate (Rated)	m³/min x No.	60
	Nominal (Rated, Factory Set)	mmAq (Pa)	3 (29)
Pipe Connection	Max	mmAq (Pa)	16 (157)
	Liquid	mm (inch)	Ø9.52 (3/8) to IDU
Sound Pressure Level	Gas	mm (inch)	Ø12.7 (1/2) to Comp. Module
	Drain	mm (inch)	Ø19.05 (3/4) to Comp. Module
Sound Power Level	Cooling (Rated)	dB(A)	45.0
	Heating (Rated)	dB(A)	45.0
Communication Cable	dB(A)		59.0
Refrigerant	mm² x No. (VCTF-SB)	1.0 x 1.5 x 2C to IDU	
	Refrigerant Name	R410A	
	Precharged Amount	kg	2.0
Power Supply	g-CO ₂ /eq	4.175	
	Control	Electronic Expansion Valve	
	Q, V, Hz	3, 380-415, 50	1, 220-240, 50

W: Applied, -: Not Applied

Note

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with this.
- Power factor could vary less than ±1% according to the operating conditions.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic rooms by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Performances are based on the following conditions:
 - Cooling: Indoor Ambient Temp: 27°CDB / 19°CWB, Outdoor Ambient Temp: 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp: 20°CDB / 15°CWB, Outdoor Ambient Temp: 7°CDB / 0°CWB
 - Interconnected Pipe Length and Difference of Elevation: - Heat Exchanger Module - Compressor Module = 5m
 - Compressor Module - Indoor Unit = 7.5m
 - Difference of Elevation (Heat Exchanger Module - Compressor Module - Indoor Unit) is Zero
- The maximum condensation rate is 1.32%.
- The product contains Fluorinated greenhouse gases (R410A, GWP (Global warming potential) = 20875)

MULTI V™ WATER IV

Highlight

- Water Cooled VRF Heat Pump & Heat Recovery
- 22.4 - 201.6kW (Cooling capacity based)
- 3Ø, 380 - 415V, 50Hz
- Outdoor unit installed indoor



Energy savings



Space savings



Convenient installation

How does it work?


Operation independent of weather conditions



Available in Heat Pump & Heat Recovery Configuration



Geothermal Application

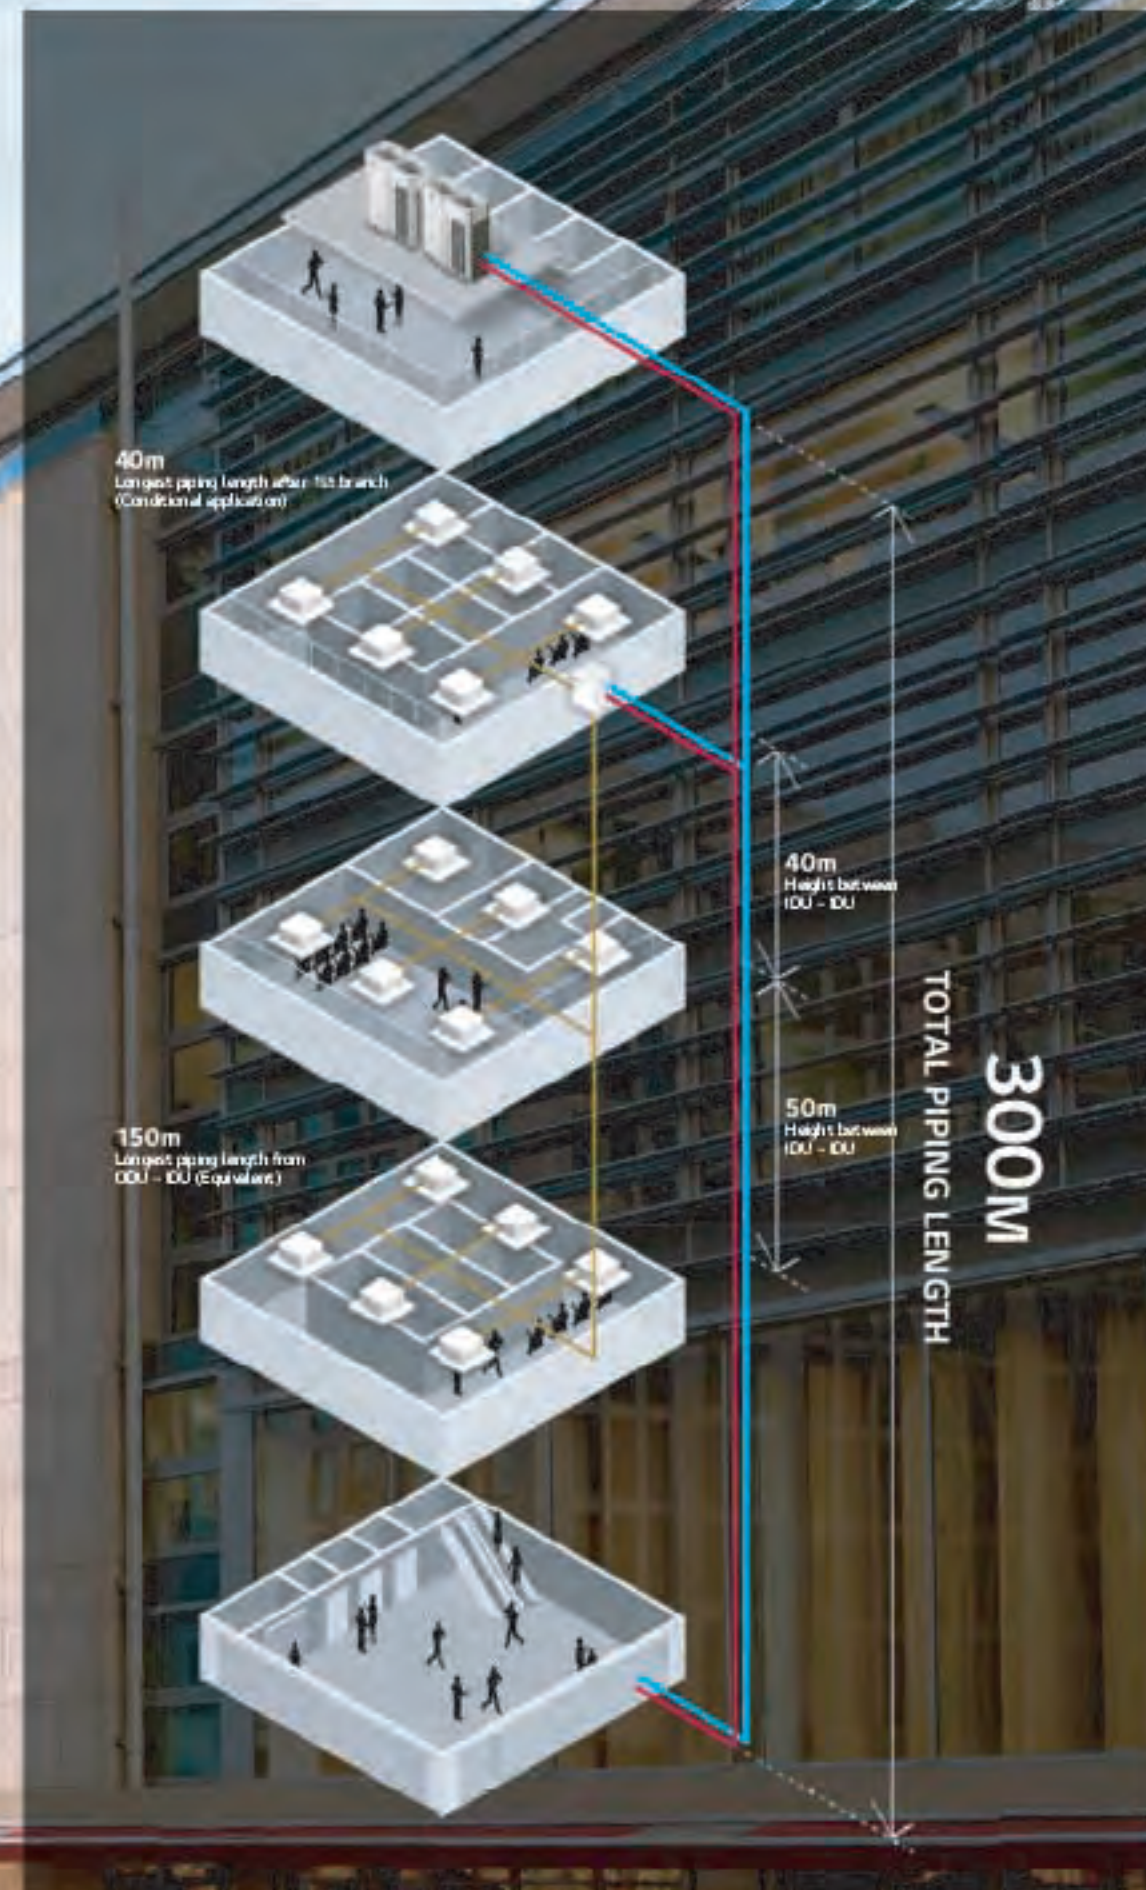

High Efficiency System Regardless of External Conditions



Regardless of outdoor temperature and other environmental conditions, MULTI V WATER IV is the optimal solution.




MULTI V WATER IV System for Geothermal Applications

Uses underground heat sources like soil, ground water, lakes, rivers and more as renewable energy for cooling and heating. Water or antifreeze solution is circulated through the closed loop HDPE (High Density Poly-Ethylene) pipes buried beneath the earth's surface.

- The Circulating water temperature range is between -5°C - 45°C
- Antifreeze should be applied depending on the application

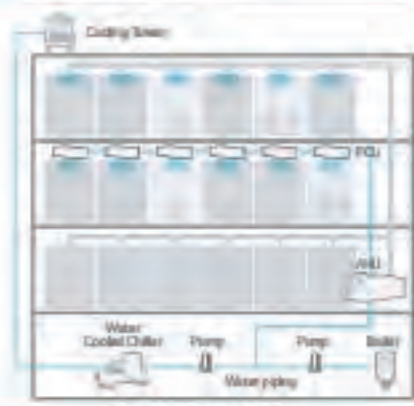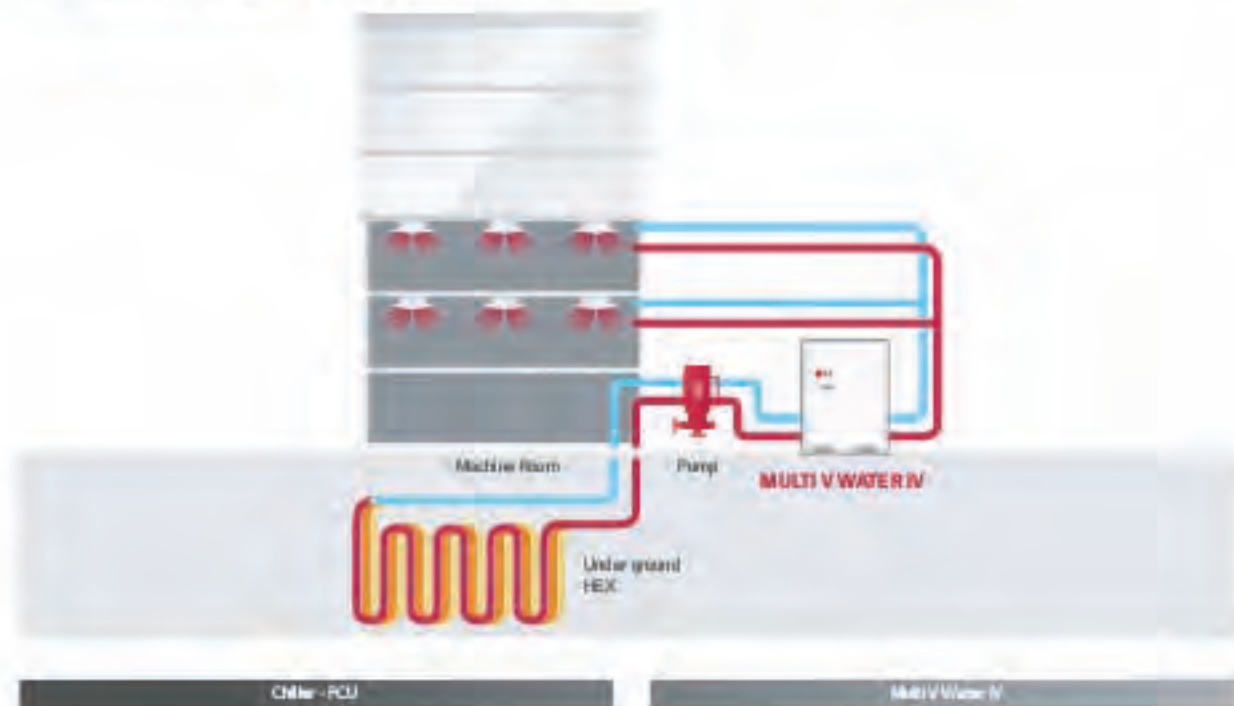

Central control

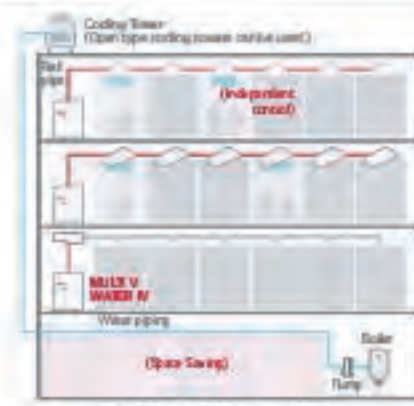


Independent control

Economical, Highly Efficient System


LG's key technologies are integrated to inverter compressor

With 4th generation inverter compressor, the Multi V Water IV boasts top-class energy efficiency.

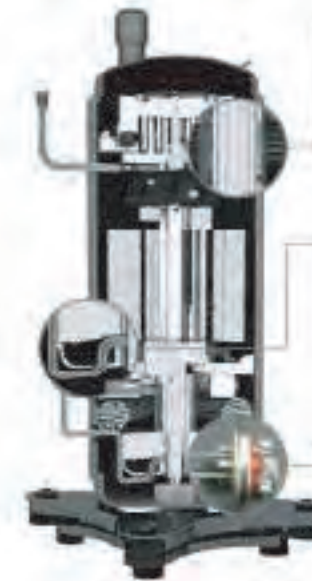


- **Extended Compressor Speed 20Hz - 140Hz**
 - Rapid operation response
 - Capable of reaching required temperature quickly
 - Increase part load efficiency
- **HiPOR™ (High Pressure Oil Return)**
 - Eliminating loss in suction gas by returning oil directly to compressor
 - Resolve compressor efficiency loss caused by oil return
- **Active oil control (Oil level sensor)**
 - Oil recovery operation occurs only when required
 - Enhance compressor reliability & continuous heating
 - Oil distribution between compressors

Maximum COP

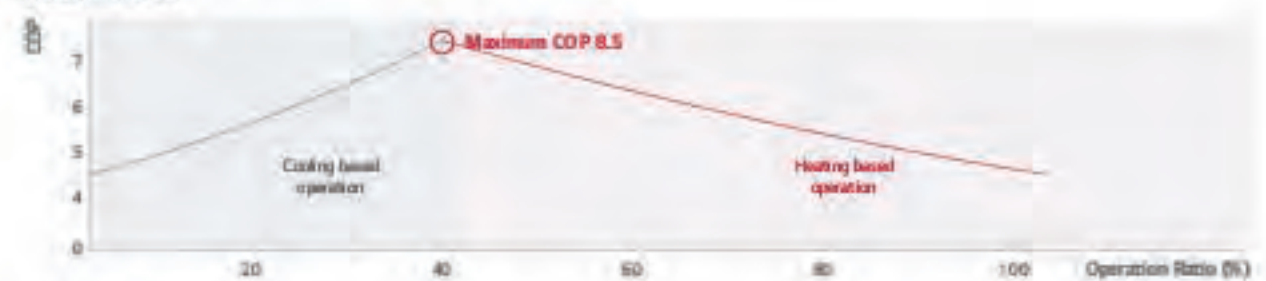


① Outdoor unit water inlet temperature: 7°C
 ② Indoor temperature: 20°C DB / 15°C WB
 ③ Maximum COP Condition (Cooling & Heating 50% operation)

Economical, Highly Efficient System

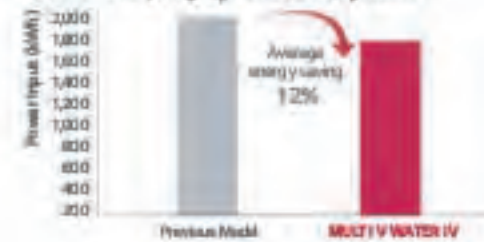

LG's 4th Generation Inverter Compressor

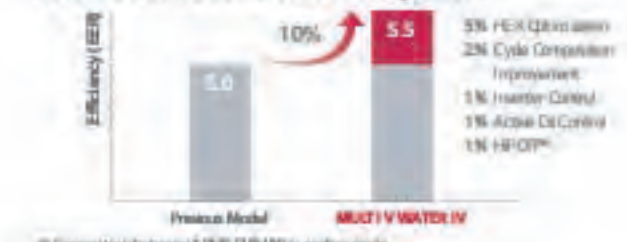

① Comparison between 1.0kW (2.8kW) in cooling mode

Integrated Part Load Efficiency





- ① HEK Optimization
- ② Cycle Compression Improvement
- ③ Inverter Control
- ④ Active Oil Control
- ⑤ HiPOR™

Variable Water Flow Control (OPTION)

In support of green building initiatives

The world's first variable water flow control system for water cooled VRF system. LG applied Variable Water Flow Control to optimize water flow control regarding partial cooling or heating load conditions. Because of this it's also possible to reduce circulation pump energy consumption.

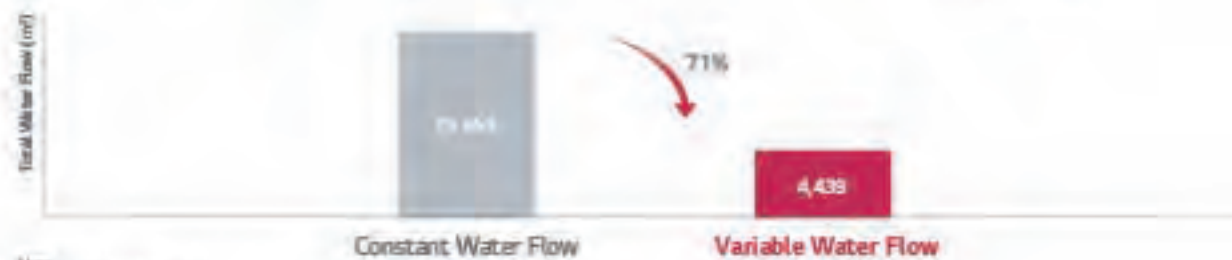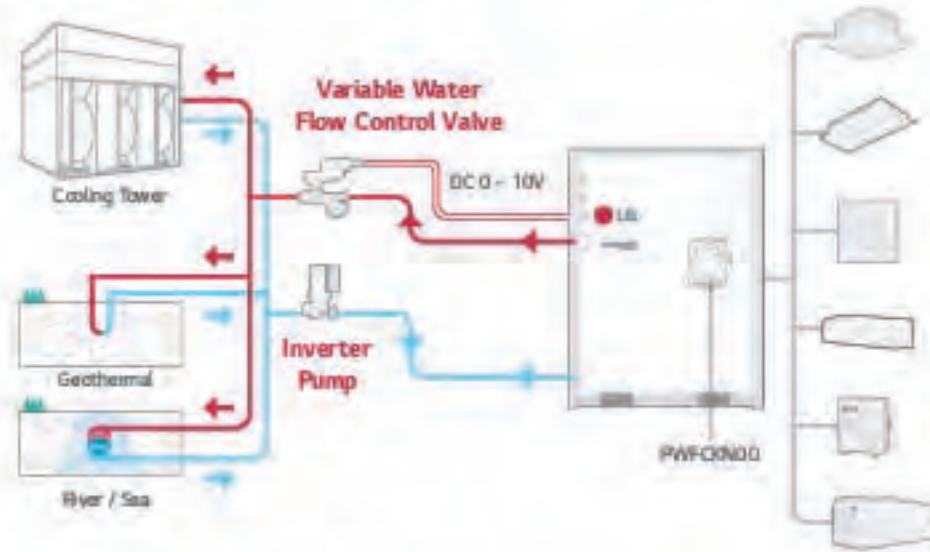


Note:
1. Location: Paris, France
2. Office: 6,000m²
3. Operation time: 2,344 hours (Cooling period)

Project Example: 63F (Pump: 20,064 LPM, 42.4mAq x 4ea)

- 1) Inverter pump with MULTI V Water and variable water flow control kit
- 2) Constant pump (Step control) with Water cooled VRF

10 years energy cost (\$)

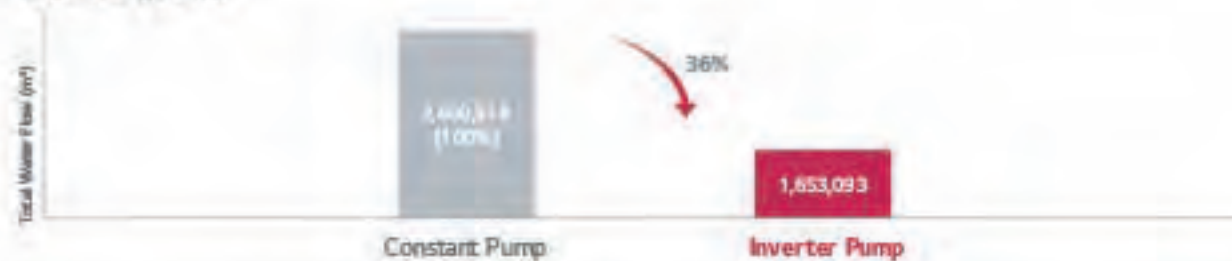

Unit	5 years		10 years	
	Energy Use (MWh)	Pump Running Cost (\$)	Energy Use (kWh)	Pump Running Cost (\$)
Constant pump	2,952,040	1,412,441	15,904,080	2,600,518
Inverter pump	3,054,940	726,225	10,109,880	1,553,093

- Power consumption rate: 0.13\$/MWh
- Annual power consumption rate expected to increase by 3%

Largest Capacity

Sufficient pipe length limitation provides flexible design and installation

Providing 8 - 20HP (22.4 - 56kW) with single unit, and up to the world's largest capacity 80HP (224kW) by combination.

HP	8	10	14	20	22	24	28	30	34	40	42 - 50	52 - 60
kW	22.4	28	39.2	56	61.6	67.2	78.4	84	95.2	112	117.6 - 168	173.6 - 224
LG	1 Unit		2 Units		3 Units		4 Units					

Longest Piping Length

Sufficient pipes length limitation in design and installation for various buildings

Provide flexible installation up to 300m of total piping length. As water pipes are not connected to indoor units, users are free from water leakage problems.



Compact Size

Thanks to compact size of product, it provides more space for commercial or public use as much as possible.

The optimal design of the compact, lightweight outdoor unit enables double stacking, which results in 50% savings in installation space.




Lightweight

Nothing or Decrease additional load reinforcement work at building

Easier to transport and install, thanks to 18% reduction in overall weight.



Nomenclature

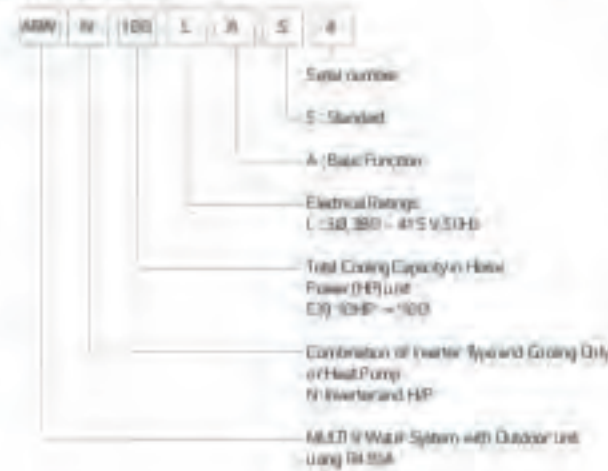


Outdoor Units Function

Category	Function	Multi V Water IV
Key Refrigerant Components	Variable Path of Outdoor unit HEX	-
	HPOR™ (High Pressure Oil Return)	○
	Humidity Sensor	-
	Corrosion Resistance Black Fin	-
Useful Function	Oil Sensor	○
	Dual Sensing	-
	Low Noise Operation	-
	High Static Mode of Outdoor Unit Fan	-
	Partial Defrosting	-
	Auto Dust Cleaning of Outdoor Unit (Fan reverse rotation)	-
	Indoor Cooling Comfort Mode Based Outdoor Temperature	-
	Smart Load Control (SLC) (Changing indoor discharge air temperature according to load)	-
	Outdoor Unit Control Refer to Humidity	-
	Defrost / Deicing	-
Reliability	High Pressure Switch	○
	Phase Protection	○
	Restart Delay (3-minutes)	○
	Self Diagnosis	○
Central Controller	Soft Start	○
	AC Ez (Simple Controller)	PACSZ25050
	AC Ez Touch	PACZA000
	AC Smart IV	PACSA8000
	AC Smart S	PACSA000
	ACP (Advanced Control Platform) IV	PACPC23A0
BNV (Building Network Unit)	ACP (Advanced Control Platform) S	PACPSA000
	AC Manager S	PACMSA000
	ACP Lanworks	PUNWH8000
Installation	ACP BA One	PQNF817C0
	Refrigerant Charging Kit	-
PDI (Power Distribution Indicator)	Variable Water Flow Valve Control Kit	RWFRV000
	Standard	FPWRD8000
Cool / Heat Selector	Premium	PQNDL1540
	PROSEM	-
IO Module (DDU Dry Contact)	Low Ambient Kit	-
	PND SM8000	-
Cycle Monitoring Device	LGMV	FRCTLD
	Mobile LGMV	PLGMVW100


○ / Applied, - / Not Applied

Operation Limits

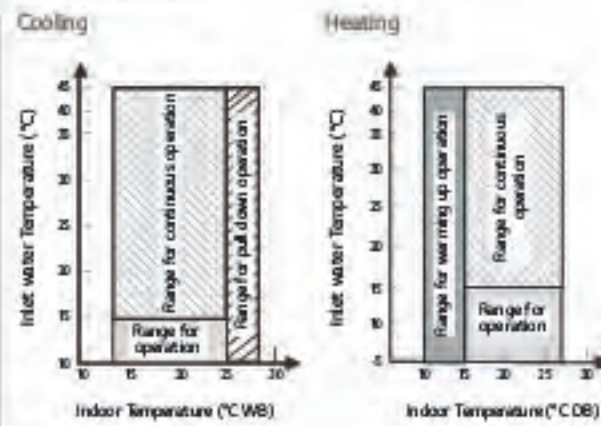

Note:
1. These figures assume the following operating conditions:
2. Equivalent piping length: 7.5m
3. Load difference: 0m

Position of Sound Pressure Level Measuring

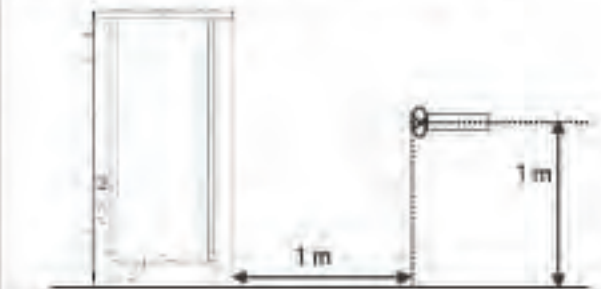

Note:
1. Data is valid at free field condition.
2. Data is valid at normal operating condition.
3. Sound level will vary depending on a range of factors such as the condenser (finnish design or coefficient) of particular room in which the equipment is installed.
4. Sound level can be increased (in case) of noise reduction at guide application.

Optional Accessories


No.	Name	Model
1	Y branch pipe	ARBLN01821
		ARBLN03321
		ARBLN07121
		ARBLN14521
		ARBLN13220
2	Header	ARBL054
		ARBL057
		ARBL104
		ARBL107
3	Connection pipe of Outdoor Units	ARBL101C
		ARBL201C
		ARCN121
		ARCN3E1

Multi V Water IV Heating Dissipation Value by Model


Model	HP	Power	Heating Dissipation Value
ARWN080LAS4	8	600 W	515.9 kcal/h 0.143 kcal/s
ARWN100LAS4	10	630 W	541.7 kcal/h 0.150 kcal/s
ARWN120LAS4	12	660 W	567.5 kcal/h 0.158 kcal/s
ARWN140LAS4	14	690 W	593.3 kcal/h 0.165 kcal/s
ARWN160LAS4	16	700 W	601.9 kcal/h 0.167 kcal/s
ARWN180LAS4	18	720 W	619.1 kcal/h 0.172 kcal/s
ARWN200LAS4	20	750 W	644.9 kcal/h 0.179 kcal/s

Note:
1. Test condition: Indoor air temperature: 20-40°C, WB: 13°C
2. A design margin should be considered to withstand system irregularities.


ARWN080LAS4 / ARWN100LAS4
ARWN140LAS4 / ARWN200LAS4

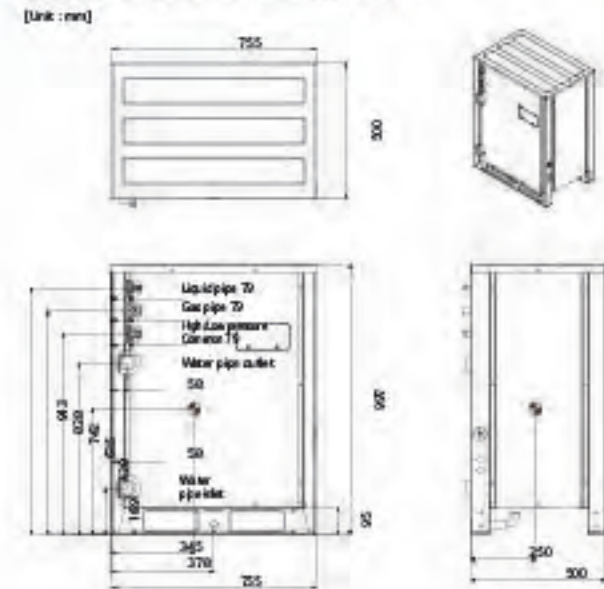

Individual Installation

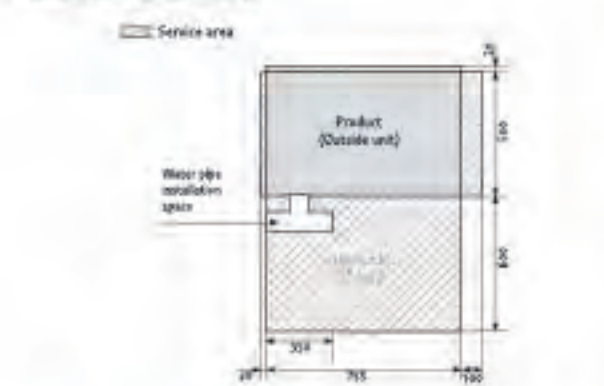

Water Piping Installation

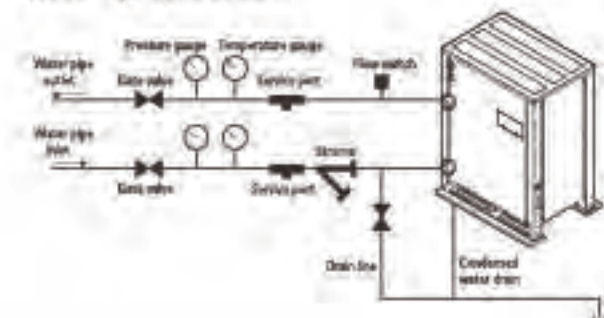

Precaution of Installation

- Do not install the unit at the outdoors (Installation of the unit outdoors could result in fire or electric shock.) Recommended ambient temperature of outdoor unit is between 0 ~ 40°C.
- Keep the water temperature between 10 ~ 45°C. Standard water supply temperature is 30°C for cooling and 20°C for heating.
- Establish an anti-freeze plan for the water supply when the product is stopped during the winter.
- Be careful of the water purity control. Ensure water purity control to avoid breakdown due to water pipe corrosion. Refer to 'Standard Table for Water Purity Control' in PDB (Product Data Book).
- The water pressure resistance of the water pipe system of this product is 1.98MPa.
- Always install a trap so that the drained water does not back flush.
- Install a pressure gauge and temperature gauge at the inlet and outlet of the water pipe.
- Flexible joints must be installed not to cause any leakage from the vibration of pipes.
- Install a service port to clean the heat exchanger at the each end of the water inlet and outlet.
- It is mandatory to install the flow switch to the water collection pipe system connecting to the outdoor unit (Flow switch acts as the 1st protection device when the heat water is not supplied).
- When setting the flow switch it is recommended to use the product with default set value to satisfy the minimum flow rate of this product. (The minimum flow rate range of this product is 50%).
- To protect the water cooling type product, you must install a strainer with 50 mesh or more on the heat water supply pipe. If not installed, it can result in damage of heat exchanger by the following situation:
 - Heat water supply with the plate type heat exchanger is composed of multiple small paths.
 - If you do not use a strainer with 50 mesh or more, alien particles can partially block the water paths.
 - When running the heater, the plate type heat exchanger plays the role of the evaporator, and at this time, the temperature of the refrigerant side drops to drop the temperature of the heat water supply which can result in icing point in the water paths.
 - As the heating process progresses, the water paths can be partially frozen to lead to damage in plate type heat exchanger.
 - As a result of the damage of the heat exchanger from the freezing, the refrigerant side and the heat water source side will be mixed to make the product unusable.

Bouygues Challenger

LG MULTI V Water Solution with Geothermal Application.



Site Information

The industrial group Bouygues was established in France in 1952. It now maintains operations in 80 countries and employs more than 131,000 people. In 1988, after two years of construction, the new headquarters for Bouygues Construction was officially opened for business. Named Challenger, the complex became a technological showcase for late 20th century architecture.

LG Solution

Bouygues decided to convert their headquarters into an eco-conscious building by significantly reducing its energy footprint. The LG MULTI V Water system was chosen as the ideal HVAC solution for this project. The system not only saves energy but also reduces water usage as it recycles water in order to regulate the temperature of the building. With LG's advanced technology, the building's water consumption was reduced by more than 70 percent.

**ARWN080LAS4 / ARWN100LAS4
ARWN140LAS4**



HP		8	10	14
Model Name	Combination Unit	ARWN080LAS4	ARWN100LAS4	ARWN140LAS4
	Independent Unit	ARWN080LAS4	ARWN100LAS4	ARWN140LAS4
Capacity	Cooling (Rated) kW	22.4	28.0	39.2
	Heating (Rated) kW	25.2	31.5	44.1
Input	Cooling (Rated) kW	3.88	3.09	2.84
	Heating (Rated) kW	4.2	3.34	3.17
EBE		5.80	3.50	5.00
ODP	Rated Capacity	6.00	3.90	5.40
Exterior	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
	RAL Code (Color)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
	Maximum Pressure Resistance	kg/cm ²	45	45
	Head Loss	MPa	10.7	15.8
	Rated Water Flow	LPM	77	96
Compressor	Type	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Combination x No.	(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
	Motor Output x Number	4,200 x 1	4,200 x 1	4,200 x 1
	Oil Type	PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
Refrigerant	Oil Charge	cc	2,800	2,800
	Liquid Pipe	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/8) (External Thread)	20A (PT 3/8) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 1	(755 x 997 x 500) x 1	(755 x 997 x 500) x 1
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 1
Net Weight	kg x No.	127 x 1	127 x 1	127 x 1
Shipping Weight	kg x No.	137 x 1	137 x 1	137 x 1
Sound Pressure Level	Cooling	dB(A)	47	50
	Heating	dB(A)	51	53
Sound Power Level	Cooling	dB(A)	59	62
	Heating	dB(A)	63	65
Communication Cable	mm ² x No. (NCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
	Refrigerant Name	R410A	R410A	R410A
Refrigerant	Prefilled Amount in Factory	kg	5.8	5.8
	± CO ₂ A		12,108	12,108
Power Supply	Control	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
	W, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units		13 (20)	16 (25)	23 (35)

Note:
 1. Maximum numbers are prepared based on assumption that all 2.5W indoor units are connected. The numbers in parentheses mean maximum connectable indoor units in accordance with outdoor units combination (100% ~ 200%). The recommended ratio is 1:3.0.
 2. Due to our policy of innovation, some specifications may be changed without notification.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp. 30°C (86°F)
 - Heating: Indoor temp. 20°C (68°F) DB, Water inlet temp. 20°C (68°F)
 - Interconnect pipe length is 75m and difference of elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP Global warming potential = 2088.3).
 6. Add an anti-freeze or circulation pump when outdoor unit is operating under 10°C (50°F), and change the DIP switch on main PCB (for more information on installation section).

ARWN200LAS4 / ARWN160LAS4
ARWN180LAS4



HP		20	16	18	
Model Name	Combination Unit	ARWN200LAS4	ARWN160LAS4	ARWN180LAS4	
	Independent Unit	ARWN200LAS4	ARWN160LAS4 ARWN180LAS4	ARWN180LAS4 ARWN180LAS4	
Capacity	Cooling (Rated) kW	56.0	44.8	50.4	
	Heating (Rated) kW	63.0	50.4	56.7	
Input	Cooling (Rated) kW	11.20	7.72	8.95	
	Heating (Rated) kW	11.67	8.40	9.54	
EER		5.00	5.80	5.63	
COP		5.40	6.00	5.94	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchange	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	kPa	30.1	33.7 + 10.7	35.8 + 10.7
	Rated Water Flow	LPM	150	77 + 77	98 + 77
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 1	(Inverter) x 2	(Inverter) x 2	
	Motor Output x Number	W x No.	5,300 x 1	4,200 x 2	4,200 x 2
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	3,000	5,600	5,600
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Inlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
	Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 1	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	
Net Weight	kg x No.	140 x 1	127 x 2	127 x 2	
Shipping Weight	kg x No.	150 x 1	137 x 2	137 x 2	
Sound Pressure Level	Cooling	dB(A)	54	50	52
	Heating	dB(A)	60	54	55
Sound Power Level	Cooling	dB(A)	68	62	64
	Heating	dB(A)	72	66	67
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	3.0	11.6	11.6
	i-CO ₂ eq		6.263	24.215	24.215
Power Supply	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units		32 (50)	26 (40)	29 (45)	

Note:
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160W - 200W). The recommended rate is 1:30N.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling / Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating / Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnect Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 3747 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2,087.5).
 6. Add insent flange to circulation water when outdoor unit is operating under 1.0°C (30°F) and change the DP switch to main PCB. (For more information on installation option.)

ARWN220LAS4 / ARWN240LAS4
ARWN280LAS4



HP		22	24	28	
Model Name	Combination Unit	ARWN220LAS4	ARWN240LAS4	ARWN280LAS4	
	Independent Unit	ARWN220LAS4 ARWN280LAS4	ARWN240LAS4 ARWN280LAS4	ARWN280LAS4 ARWN280LAS4	
Capacity	Cooling (Rated) kW	61.5	67.2	78.4	
	Heating (Rated) kW	69.3	75.6	88.2	
Input	Cooling (Rated) kW	11.70	12.93	15.68	
	Heating (Rated) kW	12.37	13.51	16.34	
EER		5.28	5.20	5.00	
COP		5.60	5.80	5.40	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchange	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	kPa	28.6 + 10.7	28.6 + 15.8	28.6 + 28.6
	Rated Water Flow	LPM	135 + 77	135 + 96	135 + 135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	
	Motor Output x Number	W x No.	4,200 x 2	4,200 x 2	4,200 x 2
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	5,600	5,600	5,600
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
	Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	
Net Weight	kg x No.	127 x 2	127 x 2	127 x 2	
Shipping Weight	kg x No.	137 x 2	137 x 2	137 x 2	
Sound Pressure Level	Cooling	dB(A)	58	59	59
	Heating	dB(A)	58	58	58
Sound Power Level	Cooling	dB(A)	70	71	72
	Heating	dB(A)	70	70	71
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	11.6	11.6	11.8
	i-CO ₂ eq		24.215	24.215	24.215
Power Supply	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units		35 (44)	39 (48)	45 (56)	

Note:
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (160W - 200W). The recommended rate is 1:30N.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling / Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating / Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnect Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation rooms by ISO 3747 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2,087.5).
 6. Add insent flange to circulation water when outdoor unit is operating under 1.0°C (30°F) and change the DP switch to main PCB. (For more information on installation option.)

ARWN300LAS4 / ARWN340LAS4
ARWN400LAS4



HP		30	34	40	
Model Name	Combination Unit	ARWN300LAS4	ARWN340LAS4	ARWN400LAS4	
	Independent Unit	ARWN200LAS4 ARWN100LAS4	ARWN200LAS4 ARWN140LAS4	ARWN200LAS4 ARWN100LAS4	
Capacity	Cooling (Rated) kW	8.40	9.52	11.20	
	Heating (Rated) kW	9.43	10.71	12.60	
Input	Cooling (Rated) kW	16.29	19.04	22.40	
	Heating (Rated) kW	17.01	19.94	23.34	
EER		5.18	5.00	5.00	
COP		5.56	5.40	5.40	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kgf/cm ²	45	45	
	Head Loss	kPa	30.1 + 15.8	30.1 + 28.6	30.1 + 30.1
	Rated Water Flow	LPM	192 + 96	192 + 135	192 + 152
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	
	Motor Output x Number	W x No.	5,300 x 1 + 4,200 x 1	5,300 x 1 + 4,200 x 1	5,300 x 2
	Oil Type		PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
Refrigerant Connecting Pipes	Oil Charge	cc	5,800	5,800	
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø24.9 (1-3/8)	Ø24.9 (1-3/8)	Ø24.9 (1-5/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	
Net Weight	kg x No.	(140 x 1) + (127 x 1)	(140 x 1) + (127 x 1)	140 x 2	
Shipping Weight	kg x No.	(150 x 1) + (137 x 1)	(150 x 1) + (137 x 1)	150 x 2	
Sound Pressure Level	Cooling	dB(A)	55	55	
	Heating	dB(A)	61	61	
Sound Power Level	Cooling	dB(A)	67	68	
	Heating	dB(A)	73	74	
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	
	Precharged Amount in Factory	kg	8.8	8.8	8.0
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units		49 (50)	55 (64)	64	

Note
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor unit combination (160% - 200%). The recommended ratio is 1:3.0.
 2. Due to surplus of installation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 30°C (86°F)
 - Interconnected Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. The product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2087.5).
 6. Add an anti-freeze to circulation water when outdoor unit is operating under 10°C (50°F), and change the OP switch on main PCB. (For more information on installation section.)

ARWN420LAS4 / ARWN440LAS4
ARWN480LAS4



HP		42	44	48	
Model Name	Combination Unit	ARWN420LAS4	ARWN440LAS4	ARWN480LAS4	
	Independent Units	ARWN200LAS4 ARWN140LAS4 ARWN100LAS4	ARWN200LAS4 ARWN140LAS4 ARWN100LAS4	ARWN200LAS4 ARWN140LAS4 ARWN100LAS4	
Capacity	Cooling (Rated) kW	11.78	123.2	13.44	
	Heating (Rated) kW	130.3	138.6	151.2	
Input	Cooling (Rated) kW	22.9	24.33	26.88	
	Heating (Rated) kW	24.04	25.18	28.01	
EER		5.14	5.11	5.00	
COP		5.50	5.50	5.40	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kgf/cm ²	45	45	
	Head Loss	kPa	30.1 + 28.6 + 10.7	30.1 + 28.6 + 15.8	30.1 + 28.6 + 28.6
	Rated Water Flow	LPM	192 + 135 + 77	192 + 135 + 96	192 + 135 + 135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 3	(Inverter) x 3	(Inverter) x 3	
	Motor Output x Number	W x No.	5,300 x 1 + 4,200 x 2	5,300 x 1 + 4,200 x 2	5,300 x 1 + 4,200 x 2
	Oil Type		PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
Refrigerant Connecting Pipes	Oil Charge	cc	8,600	8,600	
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø24.9 (1-5/8)	Ø24.9 (1-5/8)	Ø24.9 (1-5/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	
Net Weight	kg x No.	(140 x 1) + (127 x 2)	(140 x 1) + (127 x 2)	(140 x 1) + (127 x 2)	
Shipping Weight	kg x No.	(150 x 1) + (137 x 2)	(150 x 1) + (137 x 2)	(150 x 1) + (137 x 2)	
Sound Pressure Level	Cooling	dB(A)	60	60	
	Heating	dB(A)	62	62	
Sound Power Level	Cooling	dB(A)	72	73	
	Heating	dB(A)	74	76	
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	
	Precharged Amount in Factory	kg	14.5	14.5	14.5
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units		64	64	64	

Note
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor unit combination (160% - 200%). The recommended ratio is 1:3.0.
 2. Due to surplus of installation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 30°C (86°F)
 - Interconnected Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. The product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2087.5).
 6. Add an anti-freeze to circulation water when outdoor unit is operating under 10°C (50°F), and change the OP switch on main PCB. (For more information on installation section.)

ARWN500LAS4 / ARWN540LAS4
ARWN600LAS4



HP		S0	S4	S6	
Model Name	Combination Unit	ARWN500LAS4	ARWN540LAS4	ARWN600LAS4	
	Independent Unit	ARWN200LAS4 ARWN200LAS4 ARWN100LAS4	ARWN200LAS4 ARWN200LAS4 ARWN40LAS4	ARWN200LAS4 ARWN200LAS4 ARWN200LAS4	
Capacity	Cooling (Rated) kW	140.0	151.2	168.0	
	Heating (Rated) kW	157.5	170.1	189.0	
Input	Cooling (Rated) kW	27.49	30.24	33.80	
	Heating (Rated) kW	28.68	31.31	35.01	
EER		5.09	5.00	5.00	
COP	Rated Capacity	5.49	5.40	5.40	
Exterior	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kgf/cm ²	45	45	
	Head Loss	MPa	30.1 + 30.1 + 15.8	30.1 + 28.6 + 28.6	30.1 + 30.1 + 30.1
	Rated Water Flow	LPM	192 + 192 + 96	192 + 192 + 135	192 + 192 + 192
	Type		Hermetically Sealed Scroll (Inverter) x 3	Hermetically Sealed Scroll (Inverter) x 3	Hermetically Sealed Scroll (Inverter) x 3
Compressor	Combination & No. Motor Output x Number	W x No.	5,300 x 2 + 4,200 x 1	5,300 x 2 + 4,200 x 1	5,300 x 3
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	8,600	8,800	9,000
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	
Net Weight	kg x No.	(140 x 2) + (127 x 1)	(140 x 2) + (127 x 1)	140 x 3	
Shipping Weight	kg x No.	(150 x 2) + (137 x 1)	(150 x 2) + (137 x 1)	150 x 3	
Sound Pressure Level	Cooling	dB(A)	58	60	56
	Heating	dB(A)	63	62	62
Sound Power Level	Cooling	dB(A)	70	74	70
	Heating	dB(A)	75	76	76
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	11.8	11.8	9.0
	t-CO ₂ eq		24.633	24.633	18.788
Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units		64	64	64	

Note:
 1. Maximum numbers are prepared based on assumption that all 22kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (100% - 200%). The recommended ratio is 1:30%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 10°C (50°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Horizontal Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberant room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (HFCs, GWP (Global warming potential) = 20875).
 6. Add an air filter to circulation water when outdoor unit is operating under 10°C (50°F), and change the DP switch to main PCB. (For more information on installation system.)

ARWN620LAS4 / ARWN640LAS4
ARWN680LAS4



HP		S2	S4	S6	
Model Name	Combination Unit	ARWN620LAS4	ARWN640LAS4	ARWN680LAS4	
	Independent Unit	ARWN200LAS4 ARWN200LAS4 ARWN140LAS4 ARWN80LAS4	ARWN200LAS4 ARWN200LAS4 ARWN140LAS4 ARWN100LAS4	ARWN200LAS4 ARWN200LAS4 ARWN140LAS4 ARWN140LAS4	
Capacity	Cooling (Rated) kW	173.6	179.2	190.4	
	Heating (Rated) kW	195.3	201.6	214.2	
Input	Cooling (Rated) kW	34.90	35.33	38.08	
	Heating (Rated) kW	35.71	36.85	39.68	
EER		5.09	5.07	5.00	
COP	Rated Capacity	5.47	5.47	5.40	
Exterior	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kgf/cm ²	45	45	
	Head Loss	kPa	30.1 + 30.1 + 28.6 + 10.7	30.1 + 30.1 + 28.6 + 15.8	30.1 + 30.1 + 28.6 + 28.6
	Rated Water Flow	LPM	192 + 192 + 135 + 77	192 + 192 + 135 + 96	192 + 192 + 135 + 135
	Type		Hermetically Sealed Scroll (Inverter) x 4	Hermetically Sealed Scroll (Inverter) x 4	Hermetically Sealed Scroll (Inverter) x 4
Compressor	Combination & No. Motor Output x Number	W x No.	5,300 x 2 + 4,200 x 2	5,300 x 2 + 4,200 x 2	5,300 x 2 + 4,200 x 2
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	11,600	11,800	11,600
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Gas Pipe	mm (inch)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø53.98 (2-1/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + P40 (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	
Net Weight	kg x No.	(140 x 2) + (127 x 2)	(140 x 2) + (127 x 2)	(140 x 2) + (127 x 2)	
Shipping Weight	kg x No.	(150 x 2) + (137 x 2)	(150 x 2) + (137 x 2)	(150 x 2) + (137 x 2)	
Sound Pressure Level	Cooling	dB(A)	61	61	61
	Heating	dB(A)	68	64	63
Sound Power Level	Cooling	dB(A)	73	73	75
	Heating	dB(A)	76	76	77
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	17.6	17.6	17.6
	t-CO ₂ eq		36.780	36.740	36.780
Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	
Power Supply	Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50	
Number of Maximum Connectable Indoor Units		64	64	64	

Note:
 1. Maximum numbers are prepared based on assumption that all 22kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (100% - 200%). The recommended ratio is 1:30%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 10°C (50°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Horizontal Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberant room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (HFCs, GWP (Global warming potential) = 20875).
 6. Add an air filter to circulation water when outdoor unit is operating under 10°C (50°F) and change the DP switch to main PCB. (For more information on installation system.)

ARWN700LAS4 / ARWN740LAS4
ARWN800LAS4



HP			70	74	80
Model Name	Combination Unit		ARWN700LAS4	ARWN740LAS4	ARWN800LAS4
	Independent Unit		ARWN200LAS4 ARWN200LAS4 ARWN200LAS4 ARWN200LAS4	ARWN200LAS4 ARWN200LAS4 ARWN200LAS4 ARWN200LAS4	ARWN200LAS4 ARWN200LAS4 ARWN200LAS4 ARWN200LAS4
Capacity	Cooling (Rated)	kW	19.60	20.72	23.00
	Heating (Rated)	kW	220.5	233.1	252.0
Input	Cooling (Rated)	kW	38.89	41.44	44.80
	Heating (Rated)	kW	40.25	43.78	46.68
EER			5.07	5.00	5.00
COF	Rated Capacity		5.46	5.40	5.40
Exterior	Color		Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
	RAL Code (Classic)		RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
Heat Exchanger	Type		Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
	Maximum Pressure Resistance	kgf/cm ²	45	45	45
	Head Loss	kPa	30.1 + 30.1 + 30.1 + 15.8	30.1 + 30.1 + 30.1 + 28.8	30.1 + 30.1 + 30.1 + 30.1
	Rated Water Flow	LPM	792 + 792 + 792 + 96	192 + 192 + 192 + 135	192 + 192 + 192 + 192
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.		(Inverter) x 4	(Inverter) x 4	(Inverter) x 4
	Motor Output x Number	W x No.	5,300 x 3 + 4,200 x 1	5,300 x 3 + 4,200 x 1	5,300 x 4
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	11,800	11,800	12,000
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Gas Pipe	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	
Net Weight	kg x No.	(140 x 3) + (127 x 1)	(140 x 3) + (127 x 1)	140 x 4	
Shipping Weight	kg x No.	(150 x 3) + (137 x 1)	(150 x 3) + (137 x 1)	150 x 4	
Sound Pressure Level	Cooling	dB(A)	59	61	57
	Heating	dB(A)	65	63	63
Sound Power Level	Cooling	dB(A)	71	75	71
	Heating	dB(A)	77	77	77
Communication Cable	mm ² x No (VCTF-SB)		1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
	Refrigerant Name Precharged Amount in Factory	kg	R410A 14.8	R410A 14.8	R410A 12.0
Refrigerant	b-CO ₂ eq		30,895	30,895	25,050
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units *			64	64	64

Notes:
 1. Maximum numbers are prepared based on assumption that all 22kW indoor units are connected. The numbers in parentheses mean maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnected Pipe Length is 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains fluorinated greenhouse gases (R410A, GWP: Global warming potential = 20875).
 6. Add smart Pipe to circulation water when outdoor unit is operating under 10°C (50°F) and change the DIP switch on main PCB. (For more information on installation refer to the manual.)

ARWB080LAS4 / ARWB100LAS4
ARWB140LAS4



HP			8	10	14
Model Name	Combination Unit		ARWB080LAS4	ARWB100LAS4	ARWB140LAS4
	Independent Unit		ARWB080LAS4	ARWB100LAS4	ARWB140LAS4
Capacity	Cooling (Rated)	kW	22.4	28.0	39.2
	Heating (Rated)	kW	25.2	31.5	44.1
Input	Cooling (Rated)	kW	3.86	5.09	7.84
	Heating (Rated)	kW	4.20	5.34	8.17
EER			5.80	5.50	5.00
COF	Rated Capacity		6.00	5.90	5.40
Exterior	Color		Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
	RAL Code (Classic)		RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
Heat Exchanger	Type		Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
	Maximum Pressure Resistance	kgf/cm ²	45	45	45
	Head Loss	kPa	10.7	15.8	28.8
	Rated Water Flow	LPM	77	96	135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.		(Inverter) x 1	(Inverter) x 1	(Inverter) x 1
	Motor Output x Number	W x No.	4,200 x 1	4,200 x 1	4,200 x 1
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	2,800	2,800	2,800
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.52 (3/8)	Ø19.52 (3/8)	Ø12.7 (1/2)
	Low Pressure Gas Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø25.4 (1)
	High Pressure Gas Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 1	(755 x 997 x 500) x 1	(755 x 997 x 500) x 1	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 1	
Net Weight	kg x No.	127 x 1	127 x 1	127 x 1	
Shipping Weight	kg x No.	137 x 1	137 x 1	137 x 1	
Sound Pressure Level	Cooling	dB(A)	47	50	56
	Heating	dB(A)	51	53	57
Sound Power Level	Cooling	dB(A)	59	62	70
	Heating	dB(A)	63	65	69
Communication Cable	mm ² x No (VCTF-SB)		1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
	Refrigerant Name Precharged Amount in Factory	kg	R410A 5.8	R410A 5.8	R410A 5.8
Refrigerant	b-CO ₂ eq		12,108	12,108	12,108
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Power Supply	Ø V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units *			13 (20)	16 (25)	23 (25)

Notes:
 1. Maximum numbers are prepared based on assumption that all 22kW indoor units are connected. The numbers in parentheses mean maximum connectable indoor units in accordance with outdoor units combination (160% ~ 200%). The recommended ratio is 130%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnected Pipe Length is 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains fluorinated greenhouse gases (R410A, GWP: Global warming potential = 20875).
 6. Add smart Pipe to circulation water when outdoor unit is operating under 10°C (50°F) and change the DIP switch on main PCB. (For more information on installation refer to the manual.)

ARWB200LAS4 / ARWB160LAS4
ARWB180LAS4



HP			20	16	18
Model Name	Combination Unit		ARWB200LAS4	ARWB160LAS4	ARWB180LAS4
	Independent Unit		ARWB200LAS4	ARWB080LAS4 ARWB080LAS4	ARWB100LAS4 ARWB080LAS4
Capacity	Cooling (Rated)	kW	56.0	44.8	50.4
	Heating (Rated)	kW	63.0	50.4	56.7
Input	Cooling (Rated)	kW	11.20	7.72	8.95
	Heating (Rated)	kW	11.67	8.40	9.54
EER			5.00	5.80	5.63
COP			5.40	6.00	5.94
Exterior	Rated Capacity				
	Color		Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
Heat Exchanger	RAL Code (Classic)		RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
	Type		Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
Heat Exchanger	Maximum Pressure Resistance	kgf/cm ²	45	45	45
	Head Loss	kPa	303	31.7 + 10.7	15.8 + 10.7
Water Connecting Pipes	Rated Water Flow	LPM	192	7.7 + 77	96 + 77
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.		(Inverter) x 1	(Inverter) x 2	(Inverter) x 2
	Motor Output x Number	W x No.	5,300 x 1	4,200 x 2	4,200 x 2
Refrigerant Connecting Pipes	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	3,000	5,600	5,600
Water Connecting Pipes	Liquid Pipe	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Low Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
Water Connecting Pipes	High Pressure Gas Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Inlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)		mm x No.	(755 x 997 x 500) x 1	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2
Dimensions (W x H x D) - Shipping		mm x No.	(804 x 1,143 x 630) x 1	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2
Net Weight		kg x No.	140 x 1	127 x 2	127 x 2
Shipping Weight		kg x No.	150 x 1	137 x 2	137 x 2
Sound Pressure Level	Cooling	dB(A)	54	50	52
	Heating	dB(A)	60	54	55
Sound Power Level	Cooling	dB(A)	66	62	64
	Heating	dB(A)	72	66	67
Communication Cable		mm ² x No. (VCTF-5B)	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	3.0	11.6	11.6
Power Supply	t-CO ₂ eq		6.263	24.215	24.215
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Number of Maximum Connectable Indoor Units		Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50

Note
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses mean maximum connectable indoor units in accordance with outdoor units combination (1.0kW - 2.0kW). The recommended ratio is 1:30.
 2. Due to our policy of innovation some specifications may be changed without notice.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 10°C (50°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 30°C (86°F)
 - Interconnect Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2087.3).
 6. Add an anti freeze to circulation water when outdoor unit is operating under 1.0°C (30°F), and change the DIP switch on main PCB. (For more information see installation section.)

ARWB220LAS4 / ARWB240LAS4
ARWB280LAS4



HP			22	24	28
Model Name	Combination Unit		ARWB220LAS4	ARWB240LAS4	ARWB280LAS4
	Independent Unit		ARWB140LAS4 ARWB080LAS4	ARWB140LAS4 ARWB100LAS4	ARWB140LAS4 ARWB100LAS4
Capacity	Cooling (Rated)	kW	61.6	67.2	78.4
	Heating (Rated)	kW	69.3	75.6	88.2
Input	Cooling (Rated)	kW	11.70	12.93	15.68
	Heating (Rated)	kW	12.37	13.51	16.34
EER			5.38	5.20	5.00
COP			5.60	5.80	5.40
Exterior	Rated Capacity				
	Color		Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
Heat Exchanger	RAL Code (Classic)		RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
	Type		Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
Heat Exchanger	Maximum Pressure Resistance	kgf/cm ²	45	45	45
	Head Loss	kPa	28.6 + 10.7	28.6 + 15.8	28.6 + 28.6
Water Connecting Pipes	Rated Water Flow	LPM	135 + 77	135 + 96	135 + 135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.		(Inverter) x 2	(Inverter) x 2	(Inverter) x 2
	Motor Output x Number	W x No.	4,200 x 2	4,200 x 2	4,200 x 2
Refrigerant Connecting Pipes	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	5,600	5,600	5,600
Water Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
Water Connecting Pipes	High Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)
	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)		mm x No.	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2
Dimensions (W x H x D) - Shipping		mm x No.	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2
Net Weight		kg x No.	127 x 2	127 x 2	127 x 2
Shipping Weight		kg x No.	137 x 2	137 x 2	137 x 2
Sound Pressure Level	Cooling	dB(A)	58	58	59
	Heating	dB(A)	58	58	58
Sound Power Level	Cooling	dB(A)	70	71	72
	Heating	dB(A)	70	70	71
Communication Cable		mm ² x No. (VCTF-5B)	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	1.0 + 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Precharged Amount in Factory	kg	11.6	11.6	11.6
Power Supply	t-CO ₂ eq		24.215	24.215	24.215
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Number of Maximum Connectable Indoor Units		Ø, V, Hz	3, 380-415, 50	3, 380-415, 50	3, 380-415, 50

Note
 1. Maximum numbers are prepared based on assumption that all 2.2kW indoor units are connected. The numbers in parentheses mean maximum connectable indoor units in accordance with outdoor units combination (1.0kW - 2.0kW). The recommended ratio is 1:30.
 2. Due to our policy of innovation some specifications may be changed without notice.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 10°C (50°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 30°C (86°F)
 - Interconnect Pipe Length is 7.5m and difference of Elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2,087.3).
 6. Add an anti freeze to circulation water when outdoor unit is operating under 1.0°C (30°F), and change the DIP switch on main PCB. (For more information see installation section.)

ARWB300LAS4 / ARWB340LAS4
ARWB400LAS4



HP		30	34	40	
Model Name	Combination Unit	ARWB300LAS4	ARWB340LAS4	ARWB400LAS4	
	Independent Unit	ARWB200LAS4 ARWB100LAS4	ARWB200LAS4 ARWB100LAS4	ARWB200LAS4 ARWB100LAS4	
Capacity	Cooling (Rated) kW	84.0	95.2	112.0	
	Heating (Rated) kW	94.3	107.1	126.0	
Input	Cooling (Rated) kW	16.29	19.04	22.40	
	Heating (Rated) kW	17.01	19.94	23.34	
EER		5.16	5.00	5.00	
COP	Rated Capacity	5.56	5.40	5.40	
Exterior	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	MPa	30.1 + 15.8	30.1 + 28.6	30.1 + 30.1
	Rated Water Flow	LPM	192 + 96	192 + 135	192 + 192
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 2	(Inverter) x 2	(Inverter) x 2	
	Motor Output x Number	W x No.	5,300 x 1 + 4,200 x 1	5,300 x 1 + 4,200 x 1	5,300 x 2
	Oil Type		FVC680 (PVE)	FVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	5,800	5,800	6,000
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø28.58 (1-1/8)	Ø28.58 (1-1/8)	Ø34.9 (1-3/8)
	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	(755 x 997 x 500) x 2	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	(804 x 1,143 x 630) x 2	
Net Weight	kg x No.	(140 x 1) + (127 x 1)	(140 x 1) + (127 x 1)	140 x 2	
Shipping Weight	kg x No.	(150 x 1) + (137 x 1)	(150 x 1) + (137 x 1)	150 x 2	
Sound Pressure Level	Cooling	dB(A)	55	58	
	Heating	dB(A)	61	61	
Sound Power Level	Cooling	dB(A)	67	72	
	Heating	dB(A)	73	74	
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	
	Precharged Amount in Factory	kg	8.8	8.8	8.0
Power Supply	t-CO ₂ eq		18.370	18.370	
	Control		Electronic Expansion Valve	Electronic Expansion Valve	
Number of Maximum Connectable Indoor Units		49 (60)	55 (64)	64	

- Notes
1. Maximum numbers are prepared based on assumption that all 23kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor unit combination (160% ~ 200%). The recommended ratio is 1:3.0%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnected Pipe Length is 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. The product contains Fluorinated Greenhouse Gases (R410A, GWP: Global warming potential = 20875).
 6. Add smart freeze to circulation water when outdoor unit is operating under 10°C (50°F), and change the OP switch to main PCB. (For more information on installation refer to the manual.)

ARWB420LAS4 / ARWB440LAS4
ARWB480LAS4



HP		42	44	48	
Model Name	Combination Unit	ARWB420LAS4	ARWB440LAS4	ARWB480LAS4	
	Independent Unit	ARWB200LAS4 ARWB140LAS4 ARWB080LAS4	ARWB200LAS4 ARWB140LAS4 ARWB080LAS4	ARWB200LAS4 ARWB140LAS4 ARWB080LAS4	
Capacity	Cooling (Rated) kW	117.6	123.2	134.4	
	Heating (Rated) kW	132.3	136.6	151.2	
Input	Cooling (Rated) kW	22.9	24.13	26.88	
	Heating (Rated) kW	24.04	25.18	28.01	
EER		5.14	5.11	5.00	
COP	Rated Capacity	5.50	5.50	5.40	
Exterior	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	MPa	30.1 + 28.6 + 10.7	30.1 + 28.6 + 15.8	30.1 + 28.6 + 28.6
	Rated Water Flow	LPM	192 + 135 + 77	192 + 135 + 96	192 + 135 + 135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Combination x No.	(Inverter) x 3	(Inverter) x 3	(Inverter) x 3	
	Motor Output x Number	W x No.	5,300 x 1 + 4,200 x 2	5,300 x 1 + 4,200 x 2	5,300 x 1 + 4,200 x 2
	Oil Type		FVC680 (PVE)	PVC680 (PVE)	FVC680 (PVE)
	Oil Charge	cc	8,600	8,600	8,600
Refrigerant Connecting Pipes	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
	Low Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	
Net Weight	kg x No.	(140 x 1) + (127 x 2)	(140 x 1) + (127 x 2)	(140 x 1) + (127 x 2)	
Shipping Weight	kg x No.	(150 x 1) + (137 x 2)	(150 x 1) + (137 x 2)	(150 x 1) + (137 x 2)	
Sound Pressure Level	Cooling	dB(A)	60	60	
	Heating	dB(A)	62	62	
Sound Power Level	Cooling	dB(A)	72	72	
	Heating	dB(A)	74	74	
Communication Cable	mm ² x No. (VCTF-SB)	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Refrigerant	Refrigerant Name		R410A	R410A	
	Precharged Amount in Factory	kg	14.6	14.6	14.6
Power Supply	t-CO ₂ eq		30.478	30.478	
	Control		Electronic Expansion Valve	Electronic Expansion Valve	
Number of Maximum Connectable Indoor Units		54	64	64	

- Notes
1. Maximum numbers are prepared based on assumption that all 23kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor unit combination (160% ~ 200%). The recommended ratio is 1:3.0%.
 2. Due to our policy of innovation some specifications may be changed without notification.
 3. Performance are based on the following conditions:
 - Cooling: Indoor temp 27°C (80°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnected Pipe Length is 7.5m and Difference of Elevation (Outdoor - Indoor Unit) is 0m
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. The product contains Fluorinated Greenhouse Gases (R410A, GWP: Global warming potential = 20875).
 6. Add smart freeze to circulation water when outdoor unit is operating under 10°C (50°F), and change the OP switch to main PCB. (For more information on installation refer to the manual.)

ARWB500LAS4 / ARWB540LAS4
ARWB600LAS4



HP		30	54	60	
Model Name	Combination Unit	ARWB500LAS4	ARWB540LAS4	ARWB600LAS4	
	Independent Unit	ARWB200LAS4 ARWB200LAS4 ARWB100LAS4	ARWB200LAS4 ARWB200LAS4 ARWB140LAS4	ARWB200LAS4 ARWB200LAS4 ARWB200LAS4	
Capacity	Cooling (Rated) kW	140.0	151.2	168.0	
	Heating (Rated) kW	157.5	170.1	189.0	
Input	Cooling (Rated) kW	27.49	30.24	33.60	
	Heating (Rated) kW	38.68	31.51	35.01	
EER		5.09	5.00	5.00	
COP		5.89	5.40	5.40	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	kPa	30.1 + 30.1 + 15.8	30.1 + 38.6 + 28.6	30.1 + 30.1 + 30.1
	Rated Water Flow	LPM	192 + 192 + 96	192 + 192 + 135	192 + 192 + 192
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Combination x No.		(Inverter) x 3	(Inverter) x 3	(Inverter) x 3
Compressor	Motor Output x Number	W x No.	5,300 x 2 + 4,200 x 1	5,300 x 2 + 4,200 x 1	5,300 x 3
	Oil Type		PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
	Oil Charge	cc	8,800	8,800	9,000
	Liquid Pipe	mm (inch)	Ø19.05 (3/4)	Ø19.05 (3/4)	Ø19.05 (3/4)
Refrigerant Connecting Pipes	Low Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)
	High Pressure Gas Pipe	mm (inch)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)	Ø34.9 (1-3/8)
	Water Connecting Pipes		40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	(755 x 997 x 500) x 3	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	(804 x 1,143 x 630) x 3	
Net Weight	kg x No.	(140 x 2) + (127 x 1)	(140 x 2) + (127 x 1)	140 x 3	
Shipping Weight	kg x No.	(150 x 2) + (137 x 1)	(150 x 2) + (137 x 1)	150 x 3	
Sound Pressure Level	Cooling	dB(A)	58	60	58
	Heating	dB(A)	63	62	62
	Cooling	dB(A)	70	68	70
	Heating	dB(A)	75	76	76
Communication Cable	mm ² x No. (VCTF-5B)		1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	
	Refrigerant Name		R410A	R410A	
Refrigerant	Precharged Amount in Factory	kg	11.8	11.8	9.0
	t-CO ₂ eq		24.633	24.633	18.788
Power Supply	Control		Electronic Expansion Valve	Electronic Expansion Valve	
	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units			64	64	64

Note:
 1. Maximum numbers are prepared based on assumption that all 2.5-W indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (100% - 300%). The recommended ratio is 1:30.
 2. Due to our policy of innovation, some specifications may be changed without notice.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnect Pipe Length is 7.5m and difference of elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2,087.3).
 6. Add an air filter to circulation water when outdoor units is operating under 1.0°C (30°F) and change the DP switch on main PCB. (For more information on installation, see the manual.)

ARWB620LAS4 / ARWB640LAS4
ARWB680LAS4



HP		62	64	68	
Model Name	Combination Unit	ARWB620LAS4	ARWB640LAS4	ARWB680LAS4	
	Independent Unit	ARWB200LAS4 ARWB200LAS4 ARWB140LAS4 ARWB100LAS4	ARWB200LAS4 ARWB200LAS4 ARWB140LAS4 ARWB100LAS4	ARWB200LAS4 ARWB200LAS4 ARWB140LAS4 ARWB100LAS4	
Capacity	Cooling (Rated) kW	173.6	179.2	190.4	
	Heating (Rated) kW	195.3	201.6	214.2	
Input	Cooling (Rated) kW	34.10	35.33	38.08	
	Heating (Rated) kW	35.71	36.85	39.68	
EER		5.09	5.07	5.00	
COP		5.47	5.47	5.40	
Exterior	Rated Capacity				
	Color	Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray	
	RAL Code (Classic)	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	
Heat Exchanger	Type	Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate	
	Maximum Pressure Resistance	kg/cm ²	45	45	
	Head Loss	kPa	30.1 + 30.1 + 28.6 + 10.7	30.1 + 30.1 + 28.6 + 15.8	30.1 + 30.1 + 28.6 + 28.6
	Rated Water Flow	LPM	192 + 192 + 135 + 77	192 + 192 + 135 + 96	192 + 192 + 135 + 135
	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Combination x No.		(Inverter) x 4	(Inverter) x 4	(Inverter) x 4
Compressor	Motor Output x Number	W x No.	5,300 x 2 + 4,200 x 2	5,300 x 2 + 4,200 x 2	5,300 x 2 + 4,200 x 2
	Oil Type		PVC680 (PVE)	PVC680 (PVE)	PVC680 (PVE)
	Oil Charge	cc	11,600	11,600	11,600
	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
Refrigerant Connecting Pipes	Low Pressure Gas Pipe	mm (inch)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø53.98 (2-1/8)
	High Pressure Gas Pipe	mm (inch)	Ø41.3 (1-5/8)	Ø41.3 (1-5/8)	Ø44.5 (1-3/4)
	Water Connecting Pipes		40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Outlet	A (inch)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	(755 x 997 x 500) x 4	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	
Net Weight	kg x No.	(140 x 2) + (127 x 2)	(140 x 2) + (127 x 2)	(140 x 2) + (127 x 2)	
Shipping Weight	kg x No.	(150 x 2) + (137 x 2)	(150 x 2) + (137 x 2)	(150 x 2) + (137 x 2)	
Sound Pressure Level	Cooling	dB(A)	61	61	61
	Heating	dB(A)	64	64	63
	Cooling	dB(A)	73	73	75
	Heating	dB(A)	76	76	77
Communication Cable	mm ² x No. (VCTF-5B)		1.0 + 1.5 x 2C	1.0 + 1.5 x 2C	
	Refrigerant Name		R410A	R410A	
Refrigerant	Precharged Amount in Factory	kg	17.6	17.6	17.6
	t-CO ₂ eq		36.740	36.740	36.740
Power Supply	Control		Electronic Expansion Valve	Electronic Expansion Valve	
	Ø, V, Hz		3, 380-415, 50	3, 380-415, 50	3, 380-415, 50
Number of Maximum Connectable Indoor Units			64	64	64

Note:
 1. Maximum numbers are prepared based on assumption that all 2.5-W indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor units combination (100% - 300%). The recommended ratio is 1:30.
 2. Due to our policy of innovation, some specifications may be changed without notice.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnect Pipe Length is 7.5m and difference of elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured in the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the anechoic room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. This product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 2,087.3).
 6. Add an air filter to circulation water when outdoor units is operating under 1.0°C (30°F) and change the DP switch on main PCB. (For more information on installation, see the manual.)

ARWB700LAS4 / ARWB740LAS4
ARWB800LAS4





HP			70	7A	80
Model Name	Combination Unit		ARWB700LAS4	ARWB740LAS4	ARWB800LAS4
	Independent Unit		ARWB200LAS4 ARWB200LAS4 ARWB200LAS4 ARWB100LAS4	ARWB200LAS4 ARWB200LAS4 ARWB200LAS4 ARWB100LAS4	ARWB200LAS4 ARWB200LAS4 ARWB200LAS4 ARWB200LAS4
Capacity	Cooling (Rated)	kW	196.0	207.2	224.0
	Heating (Rated)	kW	220.5	233.1	252.0
Input	Cooling (Rated)	kW	38.89	41.44	44.80
	Heating (Rated)	kW	40.25	43.16	46.58
EER			5.07	5.00	5.00
COE	Rated Capacity		5.46	5.40	5.40
Exterior	Color		Warm Gray / Morning Gray	Warm Gray / Morning Gray	Warm Gray / Morning Gray
	RAL Code (Classic)		RAL 7044 / RAL 7030	RAL 7044 / RAL 7030	RAL 7044 / RAL 7030
Heat Exchanger	Type		Stainless Steel Plate	Stainless Steel Plate	Stainless Steel Plate
	Maximum Pressure Resistance	kgf/cm ²	45	45	45
	Head Loss	MPa	30.1 + 30.1 + 30.1 + 15.8	30.1 + 30.1 + 30.1 + 28.6	30.1 + 30.1 + 30.1 + 30.1
	Rated Water Flow	LPM	792 + 192 + 192 + 96	892 + 192 + 192 + 135	192 + 192 + 192 + 192
Compressor	Type		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Combination x No.		(Inverter) x 4	(Inverter) x 4	(Inverter) x 4
	Motor Output x Number	W x No.	5,300 x 2 + 4,200 x 1	5,300 x 3 + 4,200 x 1	5,300 x 4
	Oil Type		FVCS80 (PVE)	FVCS80 (PVE)	FVCS80 (PVE)
Refrigerant Connecting Pipes	Oil Charge	cc	11,800	11,800	12,000
	Liquid Pipe	mm (inch)	Ø22.2 (7/8)	Ø22.2 (7/8)	Ø22.2 (7/8)
	Low Pressure Gas Pipe	mm (inch)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)	Ø53.98 (2-1/8)
	High Pressure Gas Pipe	mm (inch)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)	Ø44.5 (1-3/4)
Water Connecting Pipes	Inlet	A (inch)	40A (PT 3-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)
	Outlet	A (inch)	40A (PT 3-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)	40A (PT 1-1/2) + 40A (PT 1-1/2) + 40A (PT 1-1/2) + PT40 (Internal Thread)
	Drain Outlet	A (inch)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)	20A (PT 3/4) (External Thread)
Dimensions (W x H x D)	mm x No.	(735 x 997 x 500) x 4	(735 x 997 x 500) x 4	(735 x 997 x 500) x 4	
Dimensions (W x H x D) - Shipping	mm x No.	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	(804 x 1,143 x 630) x 4	
Net Weight	kg x No.	(140 x 3) + (127 x 1)	(140 x 3) + (127 x 1)	140 x 4	
Shipping Weight	kg x No.	(150 x 3) + (137 x 1)	(150 x 3) + (137 x 1)	150 x 4	
Sound Pressure Level	Cooling	dB(A)	58	57	57
	Heating	dB(A)	65	63	63
Sound Power Level	Cooling	dB(A)	71	75	71
	Heating	dB(A)	77	77	77
Communication Cable	mm ² x No. (VCTF-SB)		1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Refrigerant	Refrigerant Name		R410A	R410A	R410A
	Pre-charged Amount in Factory	kg	14.8	14.8	12.0
Power Supply	b-CO ₂ -eq		30,895	30,895	25,050
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Number of Maximum Connectable Indoor Units			3 380-415, 50	3 380-415, 50	3 380-415, 50

Notes:
 1. Maximum numbers are prepared based on assumption that all 22kW indoor units are connected. The numbers in parentheses means maximum connectable indoor units in accordance with outdoor unit combination (160% - 200%). The recommended rate is 130%.
 2. Due to our policy of innovation, some specifications may be changed without notification.
 3. Performances are based on the following conditions:
 - Cooling: Indoor temp 27°C (80.6°F) DB / 19°C (66.2°F) WB, Water inlet temp 30°C (86°F)
 - Heating: Indoor temp 20°C (68°F) DB, Water inlet temp 20°C (68°F)
 - Interconnecting Pipe Length is 13m and difference of elevation (Outdoor - Indoor Unit) is 0m.
 4. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 5. The product contains Fluorinated Greenhouse Gases (R410A, GWP (Global warming potential) = 20875).
 6. Add an anti-freeze to circulation loop when outdoor unit is operating under 10°C (50°F) and change the COP with or without POC (for more information on installation section).

118-191

INDOOR UNITS

WALL MOUNTED / CEILING MOUNTED CASSETTE / CEILING MOUNTED ROUND CASSETTE /
CEILING CONCEALED DUCT / FRESH AIR INTAKE / CEILING & FLOOR CONVERTIBLE /
CEILING SUSPENDED / CONSOLE & FLOOR STANDING / COMPATIBILITY / FEATURE FUNCTIONS

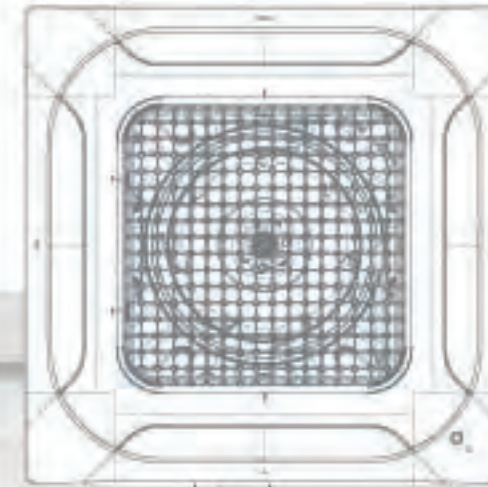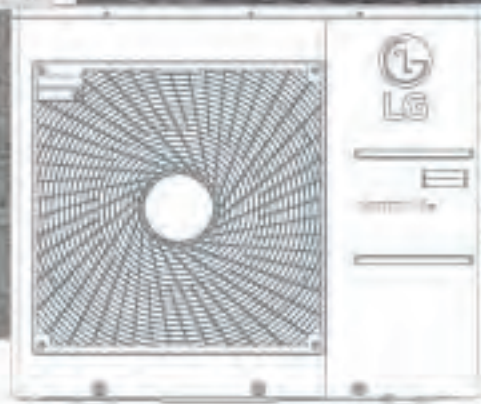



Features & Benefits

- 6 Different discharge angles can be programmed via the remote controller.
- Easily detachable full surface cover helps to clean the air conditioner.
- Drain pipe can be easily hidden from sight.

Key Applications

- Retail
- Hotel
- Restaurant
- Multi-Family Residence
- Office

	WALL MOUNTED	ARTCOOL MIRROR	ARTCOOL GALLERY	STANDARD
Smart	Wi-Fi	○	○	○
Energy Efficiency	Energy Display	○	○	○
Fast Cooling & Heating	Jet Cool	○	○	○
	Auto Swing (Up & Down)	○	○	○
Health	Ionizer	○	-	○ - 7.1kW Only
	Pre Filter	○	○	○
	Auto Cleaning	○	○	○
Comfort	Sleep Mode	○	○	○
	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermostat Control	○	○	○
	Group Control	○	○	○

○ (Applicable) - (Not applicable)

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.



LG ThinQ

Search "LG ThinQ" on Google market or the App Store to download the app.

Integrated Home Appliances Control

Control / Monitor all your LG appliances from one place.



Easy Registration and Log-in

Follow the easy set-up steps that will activate LG ThinQ's user-friendly features.



Simple operation for various functions



Straight forward Management



Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.



LG ThinQ

Search "LG ThinQ" on Google market or the App Store to download the app.

Access your air conditioner anytime and from anywhere with a Wi-Fi equipped device and LG's exclusive control app LG ThinQ



Wi-Fi Connectivity

Each user can set and save temperature and fan speed preferences in the LG ThinQ app. If a household has more than one indoor unit, separate temperature settings can be set for each.

Multiple Devices



It can be controlled by multiple users, but not simultaneously.

Multi-Control




Ionizer^{PLUS}

The powerful ionizer protects you from bad odors and Escherichia coli and Staphylococcus in the surface with over 3 million ions to reduce to make a safer, and cleaner environment.

※ Specifications may vary for each model.
※ Depending on the experimental conditions.


Reduction and Deodorization (Utilizes Over 3 Million Ions)

Ionizer⁺ reduces E.coli and Staphylococcus in the surfaces with over 3 million ions.

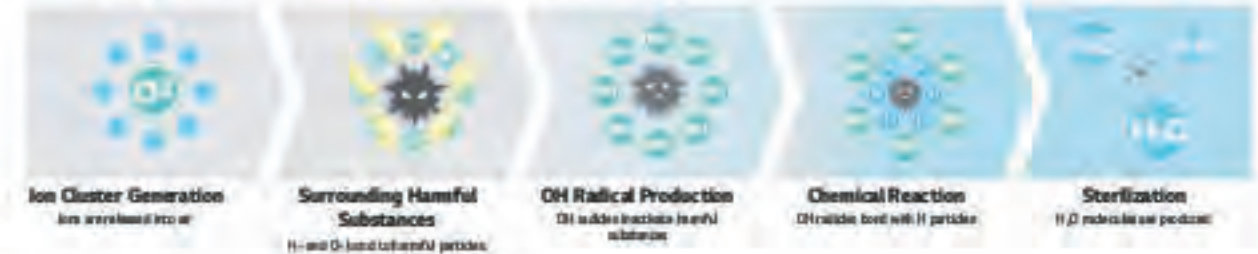

Reduction Performance Evaluations

Reduce Bacteria E.coli over 99.9% in 30 mins and staphylococcus over 99.6% in 60min.

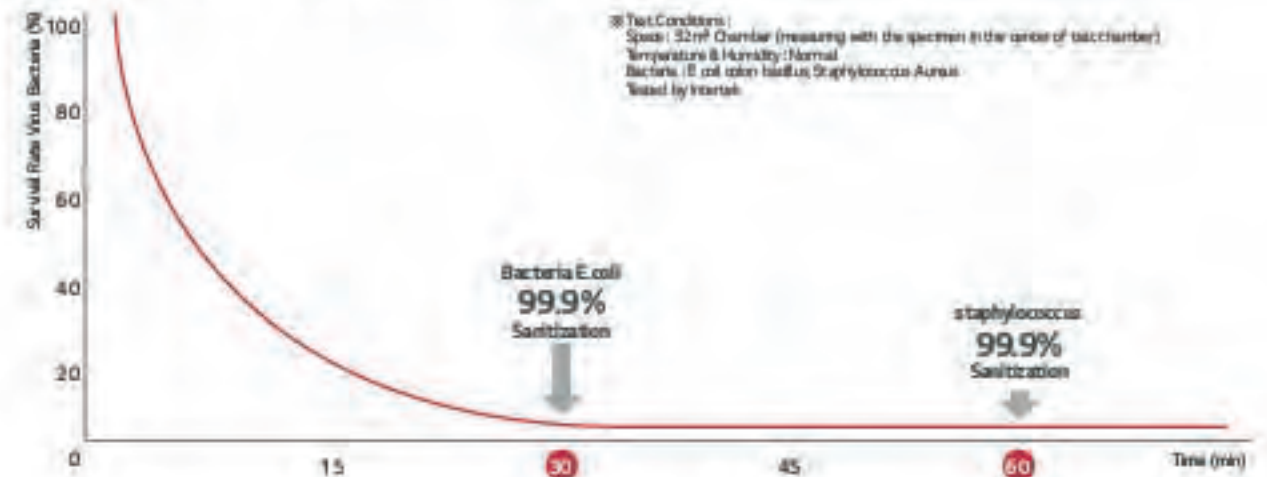

2.1 odor strength decrease in 60 minutes

An odor of measured as 2 European odor units (oE/m³) or less indicates that the level of odor falls within permissible limits.



Odor strength reduce 3.6 ⇒ 1.5 / The Odor floating in the room as well as curtain and clothes.

※ Test conditions: Space 32m³ Chamber
Temperature & Humidity: Normal
Based by year 2016.

Auto Cleaning

The unit has a self-cleaning function that dries the heat exchanger before cleaning the interior.

Pain Point

The main cause of odor within air conditioners is mold and bacteria growing on the heat exchanger. These germs can spread when the heat exchanger is wet.



Cleans Filter with Regular Airflow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger.



By dehumidifying (Some models are by dehumidifying and ionizing), the auto cleaning function prevents potentially harmful substances from forming on the surface of the heat exchanger.




The indoor environment remains odorless with the advanced deodorizing function.



By preventing pollution of the heat exchanger caused by various germs and bacteria, performance and lifespan of the air conditioner can be increased by 10 years.

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

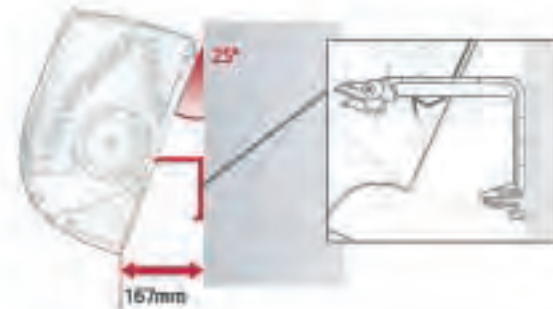


Auto Swing

Cool air extends to the entire room regardless of where the unit is situated.

※ Specifications may vary for each model.

6-Step Vane Control up to 70°


The vertical vane, which moves up and down, has 6 different settings, including full-auto swing.

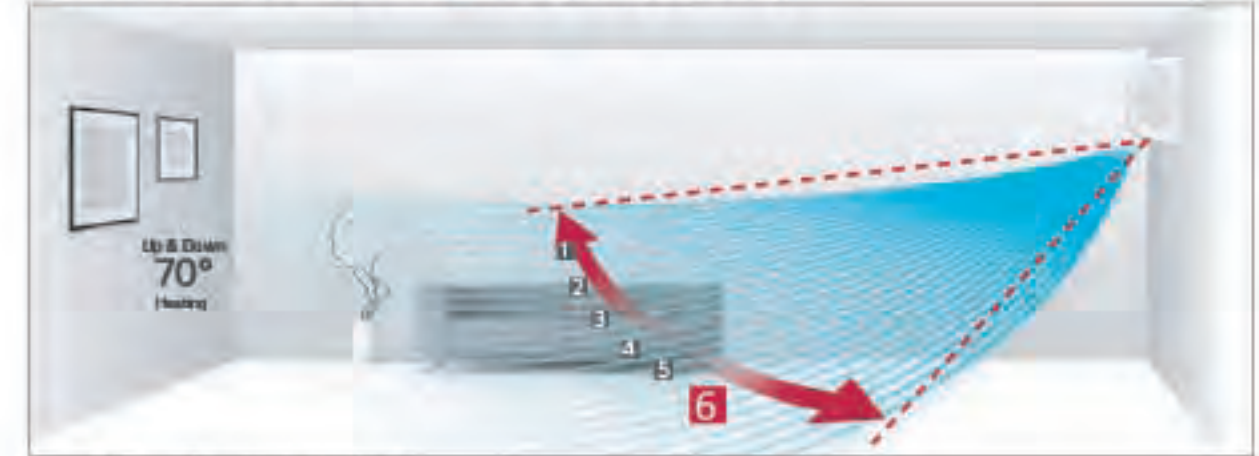

※ Angle can be different for each model and working mode.

Control up to 110°

Lower can be adjusted manually to extend left and right swing to 110 degrees.

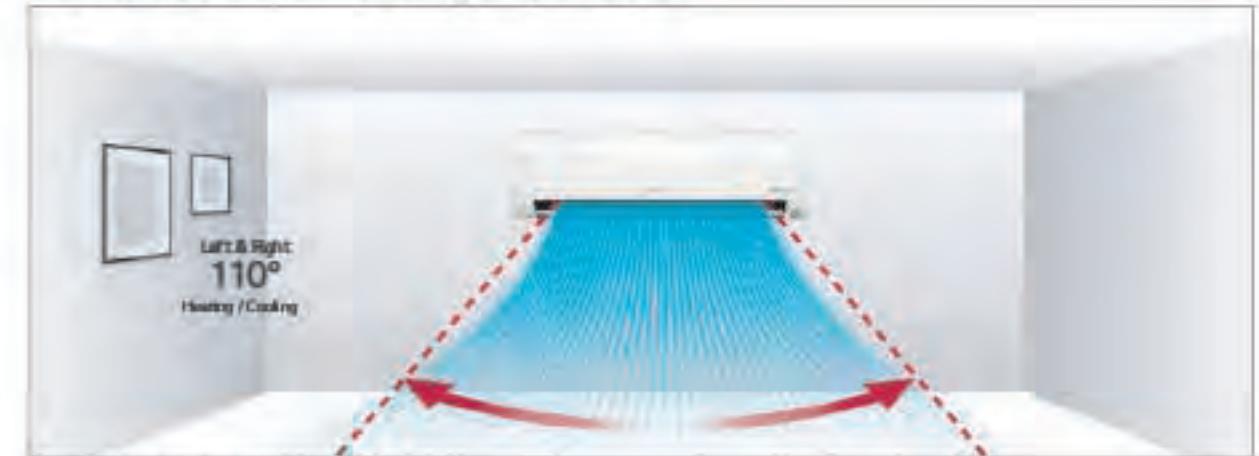

※ Angle can be different for each model and working mode.

Easy and Simple Control

Airflow direction can be changed by LG ThinQ Wi-Fi app.



Up / Down Swing

Jet Cool

IG air conditioners provide optimized high-speed airflow, which can cool rooms faster while delivering cool air evenly in every direction.

① Speed Factors may vary for each model.
② Depending on the experimental conditions.

One Click "Jet Mode"

Reduces the temperature of outflowing air to 18°C for 30 minutes with just one click.



More Powerful Performance

By reducing the second vortex, which decreases airflow within the air outlet, and enlarging the fan size, the amount of air flow is increased to 13 CMM.



Scheduled Operation

You can set the daily temperature, fan speed, the operation mode and automatic On / Off time for two weeks. It will keep running on that time until cancelled by the user.

① This function is for wireless remote controller only.
② Wired remote controller is need to be separately purchased.



Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.



Group Control

Group control by new remote controller (PREMTB100 /PREMTBB10) has more functions than previous model.



ARNU05GSJR4 / ARNU07GSJR4
ARNU09GSJR4 / ARNU12GSJR4
ARNU15GSJR4



MODEL	UNIT	ARNU05GSJR4	ARNU07GSJR4	ARNU09GSJR4	ARNU12GSJR4	ARNU15GSJR4
Cooling Capacity	kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity	kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L)	W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
Exterior Color		Mirror (Black)	Mirror (Black)	Mirror (Black)	Mirror (Black)	Mirror (Black)
RAL Code		RAL 9005	RAL 9005	RAL 9005	RAL 9005	RAL 9005
Dimensions (W x H x D)	Body mm	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192	837 x 308 x 192
	Shipping mm	909 x 383 x 256	909 x 383 x 256	909 x 383 x 256	909 x 383 x 256	909 x 383 x 256
	Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	30 x 1	30 x 1	30 x 1	30 x 1	30 x 1
	Air Flow Rate (H / M / L)	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.9	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8	10.5 / 9.5 / 6.8
	Motor Type	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.) mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body kg	9.2	9.2	9.2	9.2	9.2
Sound Pressure Levels (H / M / L)	dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)	dB(A)	54 / 53 / 52	54 / 53 / 52	55 / 54 / 52	55 / 54 / 53	58 / 56 / 54
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

- Note:
- Performance based under EN14511.
 - Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80°F) DB / 19°C (66°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU05GSJR4	ARNU07GSJR4	ARNU09GSJR4	ARNU12GSJR4	ARNU15GSJR4
Drain Pump	-	-	-	-	-
Cassette Cover	-	-	-	-	-
Refrigerant Leakage Detector	-	-	FRLDNVSD	-	-
EEV Kit	-	-	PRGK024AQ	-	-
Independent Power Module	-	-	PRPO	-	-
Robot Cleaner	-	-	-	-	-
Pre Filter (Washable)	-	-	Ø	-	-
Ion Generator	-	-	Ø	-	-
CO ₂ Sensor	-	-	-	-	-
Ventilation Kit	-	-	-	-	-
IR Receiver	-	-	-	-	-
Zone Controller	-	-	-	-	-
Dry Contact (with additional accessory)	PDRYC8000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)	Ø				
Wi-Fi	Ø				

- Ø: Applied, -: Not applied.
Option: Refer to model name in table.

ARNU18GSKR4 / ARNU24GSKR4



MODEL	UNIT	ARNU18GSKR4	ARNU24GSKR4
Cooling Capacity	kW	5.6	7.1
Heating Capacity	kW	6.3	7.5
Power Input (H / M / L)	W	32 / 26 / 16	39 / 26 / 16
Exterior Color		Mirror (Black)	Mirror (Black)
RAL Code		RAL 9005	RAL 9005
Dimensions (W x H x D)	Body mm	888 x 345 x 212	888 x 345 x 212
	Shipping mm	1,080 x 422 x 281	1,080 x 422 x 281
	Type	Cross Flow Fan	Cross Flow Fan
Fan	Motor Output x Number	58 x 1	58 x 1
	Air Flow Rate (H / M / L)	140 / 120 / 105	140 / 120 / 105
	Motor Type	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
	Gas Side mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.) mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body kg	13.4	13.4
Sound Pressure Levels (H / M / L)	dB(A)	43 / 39 / 34	46 / 41 / 34
Sound Power Levels (H / M / L)	dB(A)	63 / 57 / 54	65 / 60 / 54
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

- Note:
- Performance based under EN14511.
 - Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80°F) DB / 19°C (66°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU18GSKR4	ARNU24GSKR4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	-	FRLDNVSD
EEV Kit	-	PRGK024AQ
Independent Power Module	-	PRPO
Robot Cleaner	-	-
Pre Filter (Washable)	-	Ø
Ion Generator	-	Ø
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYC8000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	Ø	
Wi-Fi	Ø	

- Ø: Applied, -: Not applied.
Option: Refer to model name in table.

ARNU07GSF14 / ARNU09GSF14
ARNU12GSF14

MODEL	UNIT	ARNU07GSF14	ARNU09GSF14	ARNU12GSF14
Cooling Capacity	kW	2.2	2.8	3.6
Heating Capacity	kW	2.5	3.2	4.0
Power Input (H / M / L)	W	28 / 16 / 10	38 / 18 / 10	32 / 20 / 12
Dimensions (W x H x D)	mm	600 x 600 x 146	600 x 600 x 146	600 x 600 x 146
Shipping	mm	685 x 670 x 215	685 x 670 x 215	685 x 670 x 215
Fan	Type	Turbo Fan	Turbo Fan	Turbo Fan
Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1
Air Flow Rate (H / M / L)	m ³ /min	8.1 / 6.3 / 4.2	8.1 / 6.3 / 4.2	9.3 / 7.7 / 6.0
Motor Type		BLDC	BLDC	BLDC
Air Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)
Weight	Body	kg	1.50	1.50
Sound Pressure Levels (H / M / L)	dB(A)	38 / 32 / 27	38 / 32 / 27	44 / 38 / 32
Sound Power Levels (H / M / L)	dB(A)	48 / 46 / 41	48 / 46 / 41	54 / 48 / 38
Power Supply	Q, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GSF14	ARNU09GSF14	ARNU12GSF14
Drain Pump	-	-	-
Cassette Cover	-	-	-
Refrigerant Leakage Detector	-	PRLDNVSD	-
EEV Kit	-	PRGK024A0	-
Independent Power Module	-	PRIP0	-
Robot Cleaner	-	-	-
Pre Filter (Washable)	-	○	-
Ion Generator	-	-	-
CO ₂ Sensor	-	-	-
Ventilation Kit	-	-	-
IR Receiver	-	-	-
Zone Controller	-	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)	-	○	-
Wi-Fi	-	PWIFM0200 ¹	-

○: Applied - Not applied
 Option: Refer to model name table.
 1) External module only.

ARNU05GSJ*4 / ARNU07GSJ*4 / ARNU09GSJ*4
ARNU12GSJ*4 / ARNU15GSJ*4

MODEL	UNIT	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Cooling Capacity	kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity	kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L)	W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
Exterior Color		White	White	White	White	White
RAL Code		RAL 9016	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189
Shipping	mm	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249
Fan	Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	30 x 1	30 x 1
Air Flow Rate (H / M / L)	m ³ /min	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.8	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8	10.5 / 9.5 / 6.8
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body	kg	8.4	8.4	8.4	8.4
Sound Pressure Levels (H / M / L)	dB(A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)	dB(A)	54 / 53 / 52	54 / 53 / 52	55 / 54 / 53	55 / 54 / 53	58 / 56 / 54
Power Supply	Q, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

*H or C can be applied when the outdoor air temperature drops of peak.

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Drain Pump	-	-	-	-	-
Cassette Cover	-	-	-	-	-
Refrigerant Leakage Detector	-	-	PRLDNVSD	-	-
EEV Kit	-	-	PRGK024A0	-	-
Independent Power Module	-	-	PRIP0	-	-
Robot Cleaner	-	-	-	-	-
Pre Filter (Washable)	-	-	○	-	-
Ion Generator	-	-	○	-	-
CO ₂ Sensor	-	-	-	-	-
Ventilation Kit	-	-	-	-	-
IR Receiver	-	-	-	-	-
Zone Controller	-	-	-	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 point)	-	-	○	-	-
Wi-Fi	-	-	○	-	-

○: Applied - Not applied
 Option: Refer to model name table.

ARNU18GSK*4 / ARNU24GSK*4



MODEL	UNIT	ARNU18GSK*4	ARNU24GSK*4
Cooling Capacity	kW	5.6	7.1
Heating Capacity	kW	6.3	7.5
Power Input (H / M / L)	W	32 / 26 / 16	39 / 26 / 16
Exterior Color		White	White
RAL Code		RAL 9016	RAL 9016
Dimensions (W x H x D)	mm	975 x 354 x 209	975 x 354 x 209
Shipping	mm	1,063 x 420 x 274	1,063 x 420 x 274
Fan Type		Cross Flow Fan	Cross Flow Fan
Motor Output x Number	W x No.	58 x 1	58 x 1
Air Flow Rate (H / M / L)	m ³ /min	14.0 / 12.0 / 10.5	15.2 / 12.7 / 10.5
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections			
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	kg	12.2	12.2
Sound Pressure Levels (H / M / L)	dB(A)	43 / 39 / 34	46 / 41 / 34
Sound Power Levels (H / M / L)	dB(A)	63 / 57 / 54	65 / 60 / 54
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

*: Not to be applied with low static (at different size of pipe).

Note:

1. Performance based under EN14511

2. Capacities are based on the following conditions:

- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of 5m

- Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of 5m

3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU18GSK*4	ARNU24GSK*4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	-	PRLDVSD
EEV Kit	-	PRGR024AQ
Independent Power Module	-	PRIPC
Robot Cleaner	-	-
Pre Filter (Washable)	-	○
Ion Generator	-	○
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	-	○
Wi-Fi	-	○

○: Applied - Not applied
Option: Refer to model name table

ARNU30GSVA4 / ARNU36GSVA4



MODEL	UNIT	ARNU30GSVA4	ARNU36GSVA4
Cooling Capacity	kW	8.8	10.4
Heating Capacity	kW	9.4	10.8
Power Input (H / M / L)	W	54 / 43 / 31	85 / 51 / 36
Exterior Color		White	White
RAL Code		RAL 9016	RAL 9016
Dimensions (W x H x D)	mm	1,190 x 346 x 265	1,190 x 346 x 265
Shipping	mm	1,265 x 432 x 335	1,265 x 432 x 335
Fan Type		Cross Flow Fan	Cross Flow Fan
Motor Output x Number	W x No.	113 x 1	113 x 1
Air Flow Rate (H / M / L)	m ³ /min	23.0 / 20.0 / 17.0	26.0 / 23.0 / 19.0
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections			
Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	kg	16.6	16.6
Sound Pressure Levels (H / M / L)	dB(A)	49 / 44 / 42	52 / 47 / 43
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:

1. Performance based under EN14511

2. Capacities are based on the following conditions:

- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of 5m

- Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of 5m

3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU30GSVA4	ARNU36GSVA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	-	PRLDVSD
EEV Kit	-	-
Independent Power Module	-	PRIPC
Robot Cleaner	-	-
Pre Filter (Washable)	-	○
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	-	○
Wi-Fi	-	PWFMD0200*

○: Applied - Not applied
Option: Refer to model name table
*) External installation only




4 Way Air Flow with New Design

New Excellent Technology (NET) certifies new 4 way dual vane design that promotes comfortable and convenient airflow.



*New types wind

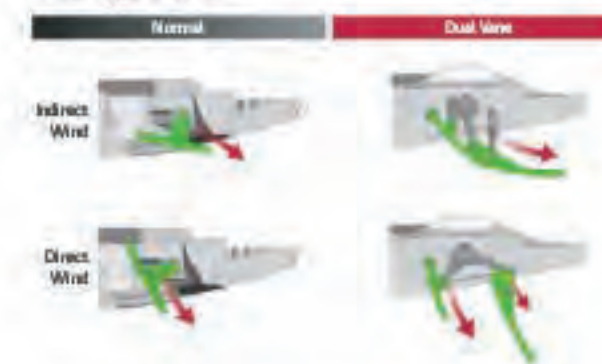

*6 Airflows mode



Brighter Color

Color enhancement allows cassette to blend in to most interior ceiling spaces.



Features & Benefits

- New dual vane 4 way cassette allows comfortable air flow
- Full 3D Turbo fan decreases air resistance, providing high air flow and low sound levels

Key Applications

- Retail
- School
- Office
- Hotel
- Dormitory
- Restaurant

CASSETTE		4 WAY	2 WAY	1 WAY
Smart	Wi-Fi	○	○	○
Energy Efficiency	Human Detect Sensor	○	-	-
	Drain Pump	○	○	○
	Sleep Mode	○	○	○
Comfort	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○

○: Applied, -: Not applied

Wide Design

Bigger inlet and outlet make faster cooling / heating airflow.




Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, so it creates high efficiency and reduces noise level.



High Efficiency Heat Exchanger (HEX)

Ø5 High Density Heat Exchanger increases cooling / heating efficiency by 10%.

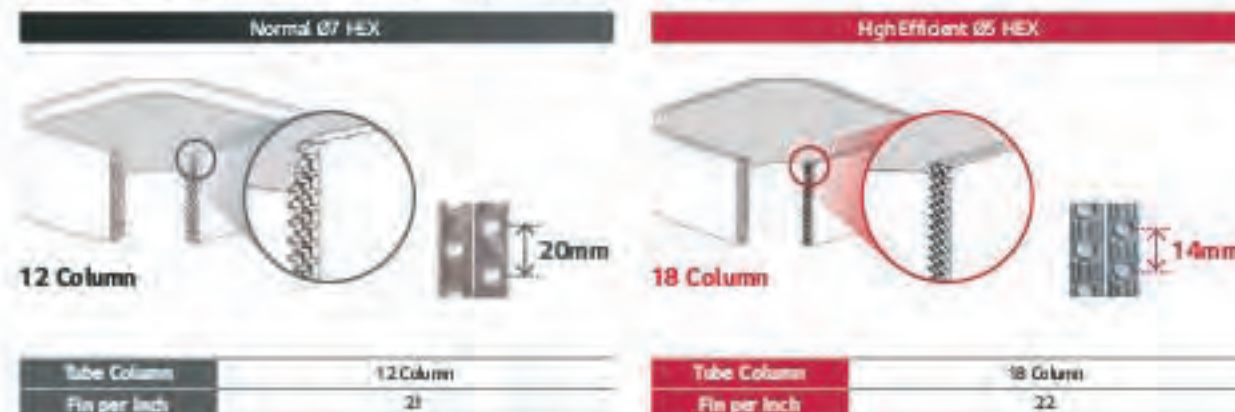

Ceiling to Floor Temperature Sensing

With a special sensor that senses both ceiling and floor temperature, dual vane 4 way cassette provides comfort air.



Human-detection Air Flow

Human detection provides users with direct or indirect air flow preferences.

Indirect comfort

Provides air flow that blows away from user for comfort.



Direct cooling

Provides air flow that blows directly into user for cooling.



Human Detection for Optimized Efficiency

Indoor unit senses human presence to switch on or off for maximum power savings of 54%.



※ Smart Dual Vane Indoor Unit 10 low up.
 ※ Data Based on actual test of LQ single product 2 hours measurement result. (Cooling 26°C, wrong wind)

High-performance Air Cleaning


Air clearing function provides fresh, filtered air.



Convenient & Powerful 5-Step Air Purification

Easy-to-manage Air Purification system with one-touch Air Purification filter.

Air Purification kit

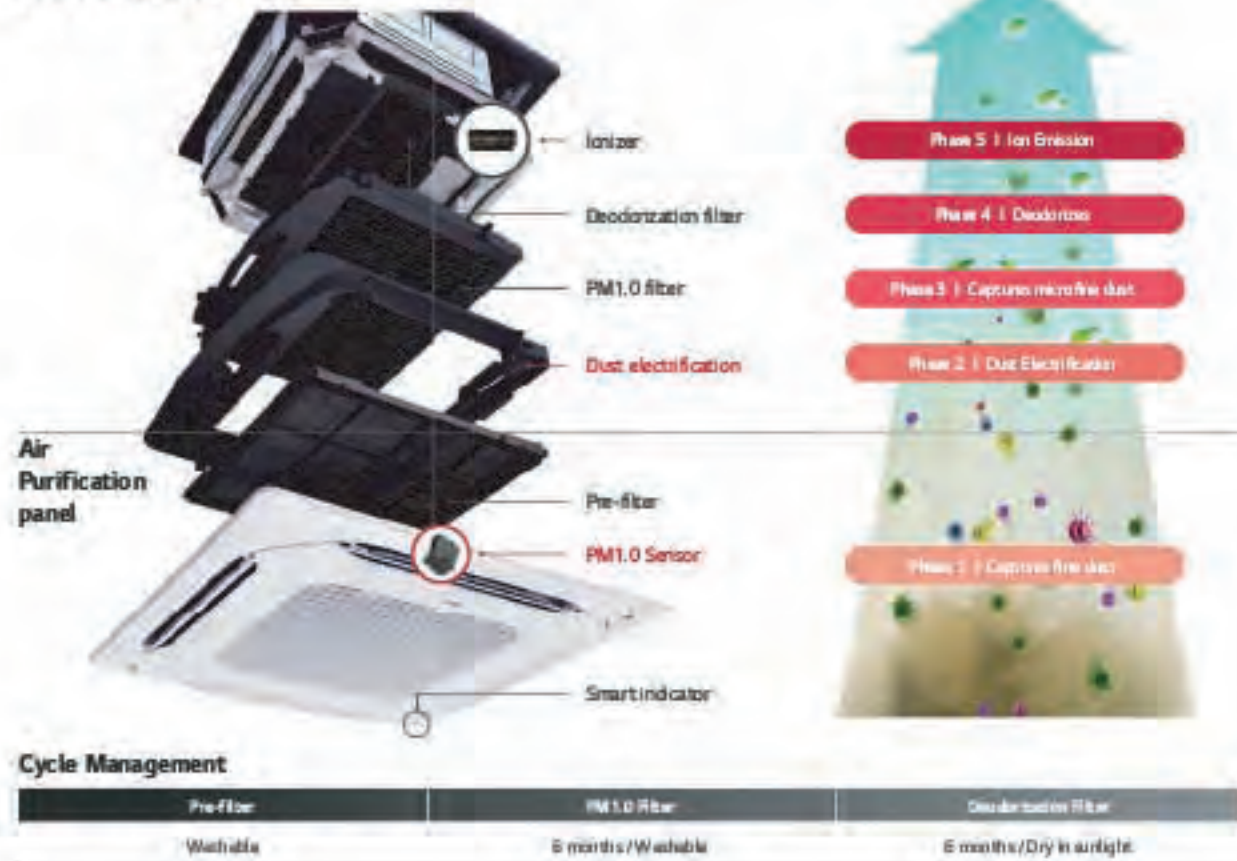

Air Quality Level Display

Wi-Fi functionality for anytime, anywhere indoor unit control and air quality level display.



Direct Wind

Warm wind can reach up to 5m with plenty air volume. (@ 0.5ms)




LG ThinQ Connectivity

Grille automatically detaches and re-attaches with 4 touch points for enhanced stability & convenient filter management.



ARNU24GTBB4 / ARNU28GTBB4
ARNU30GTBB4




MODEL	UNIT	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Cooling Capacity	kW	7.1	8.2	9.0
Heating Capacity	kW	8.0	9.2	10.0
Power Input (H / M / L)	Nominal W	32 / 27 / 20	37 / 30 / 22	48 / 36 / 25
Dimensions (W x H x D)	Body mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840
	Shipping mm	922 x 276 x 917	922 x 276 x 917	922 x 276 x 917
Fan	Type	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number W	51 x 1	51 x 1	51 x 1
	Air Flow Rate (H / M / L)	16 / 17 / 15	19 / 17 / 15	21 / 19 / 16
	Motor Type	BLED	BLED	BLED
Air Filter		Pre Filter	Pre Filter	Pre Filter
	Liquid Side mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Pipe Connections	Drain Pipe (Internal Dia.) mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body kg	21	21	21
Sound Pressure Level (H / M / L)	dB(A)	36 / 34 / 31	39 / 33 / 34	40 / 36 / 33
Sound Power Level (H / M / L)	dB(A)	46 / 44 / 42	50 / 46 / 43	53 / 50 / 45
Power Supply	Ø V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable (NCTF-5B)	mm ² x cores	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2
	Model Name	PT-AAGW0 PT-AGW0	PT-AAGW0 PT-AGW0	PT-AAGW0 PT-AGW0
Decoration	Exterior Color	White	White	White
Panel (Accessory)	RAL Code	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D) mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note:
1. Performance listed under EN14511
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Drain Pump		○	
Cassette Cover		PTDCM	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		PRPO	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYC800 (1 point contact), PDRYC820 (Universal input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)		
External Input (1 Point)		○	
Wi-Fi		PWRMDD200	
Human detection sensor		PTVSA0	
Floor Temperature Sensor		PT-AGW0 : ○	
Air cleaning kit		PT-AGW0 : PTAFMPO	
Elevation Grille		PT-AGW0 : ○	

ARNU36GTAB4 / ARNU42GTAB4
ARNU48GTAB4



MODEL	UNIT	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Cooling Capacity	kW	10.6	12.3	14.1
Heating Capacity	kW	11.9	13.6	15.9
Power Input (H / M / L)	Nominal W	69 / 49 / 37	97 / 69 / 49	110 / 76 / 61
Dimensions (W x H x D)	Body mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
Fan	Type	Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
	Motor Output x Number W	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	29 / 26 / 22	33 / 29 / 26	34 / 30 / 28
	Motor Type	BLED	BLED	BLED
Air Filter		Pre Filter	Pre Filter	Pre Filter
	Liquid Side mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
Pipe Connections	Drain Pipe (Internal Dia.) mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body kg	26	26	26
Sound Pressure Level (H / M / L)	dB(A)	42 / 39 / 36	44 / 41 / 39	46 / 43 / 41
Sound Power Level (H / M / L)	dB(A)	54 / 51 / 47	56 / 53 / 49	58 / 54 / 53
Power Supply	Ø V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable (NCTF-5B)	mm ² x cores	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2
	Model Name	PT-AAGW0 PT-AGW0	PT-AAGW0 PT-AGW0	PT-AAGW0 PT-AGW0
Decoration	Exterior Color	White	White	White
Panel (Accessory)	RAL Code	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D) mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5


Note:
1. Performance listed under EN14511
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Drain Pump		○	
Cassette Cover		PTDCM	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		PRPO	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYC800 (1 point contact), PDRYC820 (Universal input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)		
External Input (1 Point)		○	
Wi-Fi		PWRMDD200	
Human detection sensor		PTVSA0	
Floor Temperature Sensor		PT-AGW0 : ○	
Air cleaning kit		PT-AGW0 : PTAFMPO	
Elevation Grille		PT-AGW0 : ○	

High sensible

ARNU07GTAA4 / ARNU09GTAA4 / ARNU12GTAA4
ARNU15GTAA4 / ARNU18GTAA4



MODEL	UNIT	ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6
Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3
Power Input (H/M/L)	Nominal W	23 / 16 / 11	25 / 18 / 11	26 / 19 / 13	29 / 20 / 13	31 / 23 / 16
Dimensions (W x H x D)	Body mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
	Type	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan
Fan	Motor Output x Number	186 x 1	186 x 1	186 x 1	186 x 1	186 x 1
	Running Current	0.23	0.25	0.25	0.27	0.28
	Air Flow Rate (H/M/L)	19 / 16 / 13	19 / 16 / 13	20 / 17 / 15	20 / 17 / 15	21 / 19 / 16
	Motor Type	BLOC	BLOC	BLOC	BLOC	BLOC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.) mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body kg	26	26	26	26	26
Sound Pressure Level (H/M/L)	dB(A)	32 / 30 / 26	33 / 30 / 26	34 / 31 / 27	34 / 32 / 29	35 / 32 / 30
Sound Power Level (H/M/L)	dB(A)	41 / 38 / 34	42 / 39 / 34	42 / 40 / 36	43 / 40 / 37	44 / 41 / 38
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable (VCTF-SB)	mm ² x cores	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2
Decoration Panel (Accessory)	Model Name	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	White	White	White	White	White
	RAL Code	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D) mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note:
1. Performance based under ISO14517
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80°F) DB / 19°C (66°F) WB; Outdoor temp. 35°C (95°F) DB / 24°C (75°F) WB; Interconnecting piping length 7.5m; Level difference of air -
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB; Outdoor temp. 7°C (45°F) DB / 6°C (43°F) WB; Interconnecting piping length 7.5m; Level difference of air -
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GTAA4	ARNU09GTAA4	ARNU12GTAA4	ARNU15GTAA4	ARNU18GTAA4
Drain Pump			○		
Cassette Cover			PTDCM		
Refrigerant Leakage Detector			PRLDN50		
EEV Kit			-		
Independent Power Module			PRPO		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 Point)			○		
Wi-Fi			PWFMD0200		
Human detection sensor			PTVSA0		
Floor Temperature Sensor			PT-AFGW0 : ○		
Air cleaning kit			PT-ARGW0 : PTARMP0		
Elevation Grille			PT-AEGW0 : ○		

High sensible

ARNU24GTAA4 / ARNU28GTAA4 / ARNU36GTAA4
ARNU42GTAA4 / ARNU48GTAA4



MODEL	UNIT	ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Cooling Capacity	kW	7.1	8.2	10.6	12.3	14.1
Heating Capacity	kW	8.0	9.2	11.9	13.8	15.9
Power Input (H/M/L)	Nominal W	35 / 29 / 20	40 / 31 / 25	65 / 43 / 31	86 / 65 / 43	100 / 67 / 53
Dimensions (W x H x D)	Body mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
	Type	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan	Full 30 Turbo Fan
Fan	Motor Output x Number	186 x 1	186 x 1	186 x 1	186 x 1	186 x 1
	Running Current	0.28	0.46	0.80	0.80	0.88
	Air Flow Rate (H/M/L)	23 / 21 / 19	24 / 22 / 20	28 / 24 / 21	31 / 28 / 24	33 / 28 / 26
	Motor Type	BLOC	BLOC	BLOC	BLOC	BLOC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.) mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body kg	26	26	26	26	26
Sound Pressure Level (H/M/L)	dB(A)	39 / 36 / 33	40 / 37 / 34	42 / 39 / 35	46 / 42 / 39	47 / 43 / 41
Sound Power Level (H/M/L)	dB(A)	47 / 45 / 42	48 / 46 / 42	51 / 48 / 44	54 / 51 / 48	56 / 52 / 50
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable (VCTF-SB)	mm ² x cores	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2	1.0 - 1.5 x 2
Decoration Panel (Accessory)	Model Name	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color	White	White	White	White	White
	RAL Code	RAL 9003	RAL 9003	RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D) mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight kg	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5	7.1 / 7.5 / 8.5

Note:
1. Performance based under ISO14517
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80°F) DB / 19°C (66°F) WB; Outdoor temp. 35°C (95°F) DB / 24°C (75°F) WB; Interconnecting piping length 7.5m; Level difference of air -
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB; Outdoor temp. 7°C (45°F) DB / 6°C (43°F) WB; Interconnecting piping length 7.5m; Level difference of air -
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU24GTAA4	ARNU28GTAA4	ARNU36GTAA4	ARNU42GTAA4	ARNU48GTAA4
Drain Pump			○		
Cassette Cover			PTDCM		
Refrigerant Leakage Detector			PRLDN50		
EEV Kit			-		
Independent Power Module			PRPO		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 Point)			○		
Wi-Fi			PWFMD0200		
Human detection sensor			PTVSA0		
Floor Temperature Sensor			PT-AFGW0 : ○		
Air cleaning kit			PT-ARGW0 : PTARMP0		
Elevation Grille			PT-AEGW0 : ○		

ARNU05GTRB4 / ARNU07GTRB4
ARNU09GTRB4 / ARNU12GTRB4



MODEL	UNIT	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4	
Cooling Capacity	kW	1.6	2.2	2.8	3.6	
Heating Capacity	kW	1.8	2.5	3.2	4.0	
Power Input (H / M / L)	W	13 / 12 / 11	13 / 12 / 11	14 / 13 / 12	17 / 15 / 13	
Dimensions (W x H x D)	Body	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	
	Shipping	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646	
Fan	Type	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan	
	Motor Output x Number	43 x 1	43 x 1	43 x 1	43 x 1	
	Air Flow Rate (H / M / L)	7.5 / 7.0 / 6.6	7.5 / 7.0 / 6.6	8.0 / 7.5 / 7.1	8.7 / 8.0 / 7.0	
	Motor Type	BLDC	BLDC	BLDC	BLDC	
Air Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	
	Liquid Side	mm (inch)	06.35 (1/4)	06.35 (1/4)	06.35 (1/4)	
Pipe Connections	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	
Weight	kg	12.6	12.6	13.7	13.7	
Sound Pressure Levels (H / M / L)	dB(A)	29 / 27 / 26	29 / 27 / 26	30 / 29 / 27	32 / 30 / 27	
Sound Power Levels (H / M / L)	dB(A)	4.5 / 4.3 / 4.2	4.5 / 4.3 / 4.2	4.6 / 4.3 / 4.2	4.8 / 4.6 / 4.3	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Decorative Panel (Accessory)	Model Name	PT-UQC PT-QCHWD PT-QAGWD	PT-UQC PT-QCHWD PT-QAGWD	PT-UQC PT-QCHWD PT-QAGWD	PT-UQC PT-QCHWD PT-QAGWD	
	Exterior Color	Morning Fog	Morning Fog	Morning Fog	Morning Fog	
	RAL Code	RAL 9001	RAL 9001	RAL 9001	RAL 9001	
	Net Dimensions (W x H x D)	mm	700 x 22 x 700 620 x 20 x 620	700 x 22 x 700 620 x 20 x 620	700 x 22 x 700 620 x 20 x 620	700 x 22 x 700 620 x 20 x 620
	Net Weight	kg	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0

Note:
1. Performance listed under EN14511.
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Drain Pump		○		
Cassette Cover		PTDC0		
Refrigerant Leakage Detector		PSLDNVS0		
EEV Kit		FRG024A0 (-4.5kW)		
Independent Power Module		PRPO		
Robot Cleaner		-		
Pre Filter (Washable)		○		
Ion Generator		-		
CO ₂ Sensor		-		
Ventilation Kit		PTV430		
IR Receiver		-		
Zone Controller		-		
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○		
Wi-Fi		PWRM0200		

○: Applied, -: Not applied.
Open: Refer to model name table.

ARNU15GTQB4 / ARNU18GTQB4
ARNU21GTQB4



MODEL	UNIT	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4	
Cooling Capacity	kW	4.5	5.6	6.0	
Heating Capacity	kW	5.0	6.3	6.8	
Power Input (H / M / L)	W	24 / 21 / 18	25 / 22 / 19	28 / 23 / 20	
Dimensions (W x H x D)	Body	570 x 256 x 570	570 x 256 x 570	570 x 256 x 570	
	Shipping	667 x 327 x 646	667 x 327 x 646	667 x 327 x 646	
Fan	Type	Turbo Fan	Turbo Fan	Turbo Fan	
	Motor Output x Number	43 x 1	43 x 1	43 x 1	
	Air Flow Rate (H / M / L)	11.0 / 10.0 / 9.3	11.2 / 11.0 / 10.0	12.0 / 11.1 / 9.4	
	Motor Type	BLDC	BLDC	BLDC	
Air Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	
	Liquid Side	mm (inch)	06.35 (1/4)	06.35 (1/4)	
Pipe Connections	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	
Weight	kg	15.0	15.0	15.0	
Sound Pressure Levels (H / M / L)	dB(A)	36 / 34 / 32	37 / 35 / 34	40 / 36 / 34	
Sound Power Levels (H / M / L)	dB(A)	50 / 48 / 46	51 / 50 / 48	53 / 51 / 48	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	
Decorative Panel (Accessory)	Model Name	PT-UQC PT-QCHWD PT-QAGWD	PT-UQC PT-QCHWD PT-QAGWD	PT-UQC PT-QCHWD PT-QAGWD	
	Exterior Color	Morning Fog	Morning Fog	Morning Fog	
	RAL Code	RAL 9001	RAL 9001	RAL 9001	
	Net Dimensions (W x H x D)	mm	700 x 22 x 700 620 x 20 x 620	700 x 22 x 700 620 x 20 x 620	700 x 22 x 700 620 x 20 x 620
	Net Weight	kg	3.0 / 3.0	3.0 / 3.0	3.0 / 3.0

Note:
1. Performance listed under EN14511.
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero.
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Drain Pump		○	
Cassette Cover		PTDC0	
Refrigerant Leakage Detector		PSLDNVS0	
EEV Kit		FRG024A0 (-4.5kW)	
Independent Power Module		PRPO	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		PTV430	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWRM0200	

○: Applied, -: Not applied.
Open: Refer to model name table.

ARNU09GTSC4 / ARNU12GTSC4



MODEL	UNIT	ARNU09GTSC4	ARNU12GTSC4
Cooling Capacity	kW	2.8	3.6
Heating Capacity	kW	3.2	4.0
Power Input (H / M / L)	W	16 / 14 / 11	18 / 14 / 11
Dimensions Body	mm	830 x 225 x 600	830 x 225 x 600
(W x H x D) Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan			
Type		Turbo Fan	Turbo Fan
Motor Output x Number	W x No.	37 x 1	37 x 1
Air Flow Rate (H / M / L)	m ³ /min	10.8 / 9.8 / 9.1	11.1 / 10.3 / 9.1
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
Pipe Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
Connections Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)	dB(A)	33 / 31 / 29	34 / 32 / 29
Sound Power Levels (H / M / L)	dB(A)	42 / 40 / 38	43 / 41 / 39
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Model Name		PT-USC	PT-USC
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
Net Weight	kg	4.7	4.7

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU09GTSC4	ARNU12GTSC4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDWS0
EEV Kit		PRGK024A0 (-5.6kW)
Independent Power Module		FRPO
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO2 Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD0200

○: Applied, -: Not applied
 Option: Refer to model name in table.

ARNU18GTSC4 / ARNU24GTSC4



MODEL	UNIT	ARNU18GTSC4	ARNU24GTSC4
Cooling Capacity	kW	5.6	7.1
Heating Capacity	kW	6.3	8.0
Power Input (H / M / L)	W	19 / 16 / 14	31 / 22 / 14
Dimensions Body	mm	830 x 225 x 600	830 x 225 x 600
(W x H x D) Shipping	mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan			
Type		Turbo Fan	Turbo Fan
Motor Output x Number	W x No.	37 x 1	37 x 1
Air Flow Rate (H / M / L)	m ³ /min	11.6 / 10.8 / 9.8	14.5 / 12.4 / 10.3
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø9.52 (3/8)
Pipe Gas Side	mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)
Connections Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight Body	kg	18.1	18.1
Sound Pressure Levels (H / M / L)	dB(A)	35 / 33 / 31	40 / 37 / 33
Sound Power Levels (H / M / L)	dB(A)	44 / 42 / 40	48 / 45 / 40
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Model Name		PT-USC	PT-USC
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Net Dimensions (W x H x D)	mm	1,100 x 28 x 690	1,100 x 28 x 690
Net Weight	kg	4.7	4.7

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU18GTSC4	ARNU24GTSC4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDWS0
EEV Kit		PRGK024A0 (-5.6kW)
Independent Power Module		FRPO
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO2 Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWFMD0200

○: Applied, -: Not applied
 Option: Refer to model name in table.

ARNU07GTUB4 / ARNU09GTUB4
ARNU12GTUB4



MODEL	UNIT	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Cooling Capacity	kW	2.2	2.8	3.6
Heating Capacity	kW	2.5	3.2	4.0
Power Input (H / M / L)	W	20 / 18 / 16	22 / 20 / 18	24 / 22 / 20
Dimensions (W x H x D)	mm	860 x 132 x 450	860 x 132 x 450	860 x 132 x 450
Shipping (W x H x D)	mm	1,129 x 259 x 538	1,129 x 259 x 538	1,129 x 259 x 538
Fan				
Type		Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1
Air Flow Rate (H / M / L)	m³/min	6.2 / 7.3 / 6.4	9.3 / 8.6 / 8.2	10.0 / 9.2 / 8.3
Motor Type		BLDC	BLDC	BLDC
Air Filter				
Type		Pre Filter	Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	kg	12.2	12.2	12.2
Sound Pressure Levels (H / M / L)	dB(A)	32 / 29 / 28	35 / 34 / 32	36 / 35 / 32
Sound Power Levels (H / M / L)	dB(A)	47 / 44 / 41	50 / 48 / 47	52 / 50 / 47
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Model Name		PT-UAHG0, PT-UAHW0, PT-UPHG0	PT-UAHG0, PT-UAHW0, PT-UPHG0	PT-UAHG0, PT-UAHW0, PT-UPHG0
Decorations				
Exterior Color		Noble White	Noble White	Noble White
Panel RAL Code		RAL 9003	RAL 9003	RAL 9003
Net Dimensions (W x H x D)	mm	1,420 x 34 x 500	1,420 x 34 x 500	1,420 x 34 x 500
Net Weight	kg	5.5 / 6.5	5.5 / 6.5	5.5 / 6.5

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Heat-exchanging piping length 7.5m, Level difference of zero.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Heat-exchanging piping length 7.5m, Level difference of zero.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		FRLDNVSD	
EEV Kit		FRGR024A0	
Independent Power Module		FRFPO	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO2 Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)		○	
Air Cleaning Kit		PTAHTPO	
Wi-Fi		PWFMD0200	

○: Applied, -: Not applied
 Option (Refer to model name in table)

ARNU18GTTB4 / ARNU24GTTB4



MODEL	UNIT	ARNU18GTTB4	ARNU24GTTB4
Cooling Capacity	kW	5.6	7.1
Heating Capacity	kW	6.3	7.1
Power Input (H / M / L)	W	38 / 28 / 24	51 / 33 / 26
Dimensions (W x H x D)	mm	1,180 x 132 x 450	1,180 x 132 x 450
Shipping (W x H x D)	mm	1,499 x 259 x 538	1,499 x 259 x 538
Fan			
Type		Cross Flow Fan	Cross Flow Fan
Motor Output x Number	W x No.	30 x 1	30 x 1
Air Flow Rate (H / M / L)	m³/min	13.3 / 12.1 / 10.9	14.6 / 13.3 / 11.5
Motor Type		BLDC	BLDC
Air Filter			
Type		Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	kg	15.6	15.6
Sound Pressure Levels (H / M / L)	dB(A)	40 / 37 / 35	43 / 40 / 36
Sound Power Levels (H / M / L)	dB(A)	56 / 53 / 48	59 / 53 / 50
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C
Model Name		PT-TAHG0, PT-TAHW0, PT-TPHG0	PT-TAHG0, PT-TAHW0, PT-TPHG0
Decorations			
Exterior Color		Noble White	Noble White
Panel RAL Code		RAL 9003	RAL 9003
Net Dimensions (W x H x D)	mm	1,100 x 34 x 500	1,100 x 34 x 500
Net Weight	kg	4.6 / 5.3	4.6 / 5.3

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Heat-exchanging piping length 7.5m, Level difference of zero.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Heat-exchanging piping length 7.5m, Level difference of zero.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories


CHASSIS	ARNU18GTTB4	ARNU24GTTB4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		FRLDNVSD
EEV Kit		FRGR024A0
Independent Power Module		FRFPO
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO2 Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)		○
Air Cleaning Kit		PTAHTPO
Wi-Fi		PWFMD0200

○: Applied, -: Not applied
 Option (Refer to model name in table)




Slim and Compact Design

Reduce the height of the body by 15%, save space and maximize the openness of the interior space.

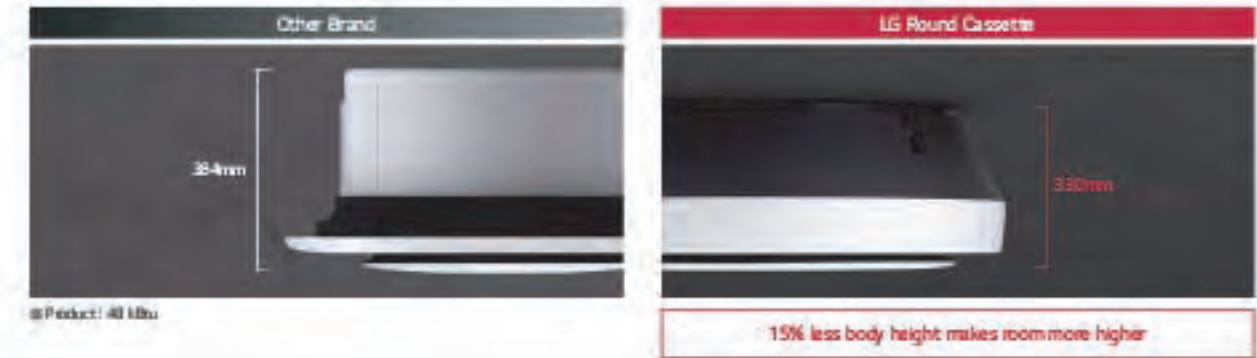


Minimal Exposure Design

Pipes are brought together in one place to minimize exposure. Hanger covers hide installations to add a clean look.

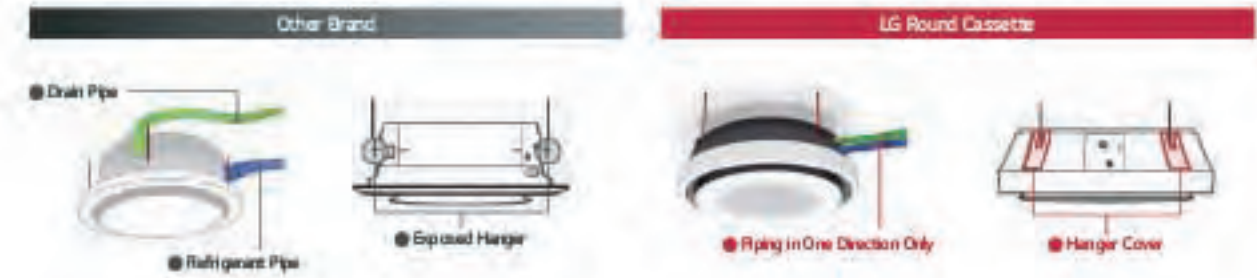

Perfect Round Air Flow

Perfect round flow without blind spots.

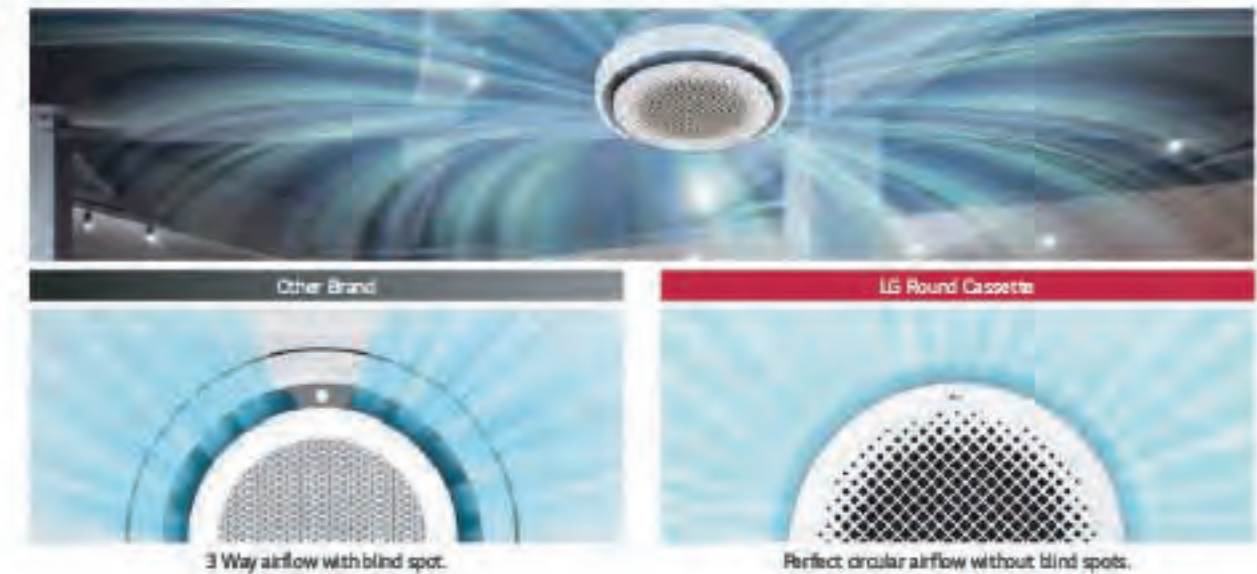

Features & Benefits

- Luxe round design can make a luxurious space with a round design considering side view.
- Perfect round air flow without blind spots.

Key Applications

- Retail
- Office
- Restaurant
- Hotel

	CASSETTE	ROUND
Smart	Wi-Fi	○
Energy Efficiency	Human Detect Sensor	-
	Drain Pump	○
	Sleep Mode	○
Comfort	Timer (On / Off)	○
	Timer (Weekly)	○
	Two Thermostat Control	○
	Group Control	○

○: Applied, -: Not applied

Visible Air Flow


With crystal vein for 6-step precision control, you can send cool / heated air wherever you want.



Powerful and Quiet Air Flow

3D fan increases airflow by 5% and noise reduction technology makes a quieter, more comfortable space.

Full 3D Fan, Air flow rate 5% ↑

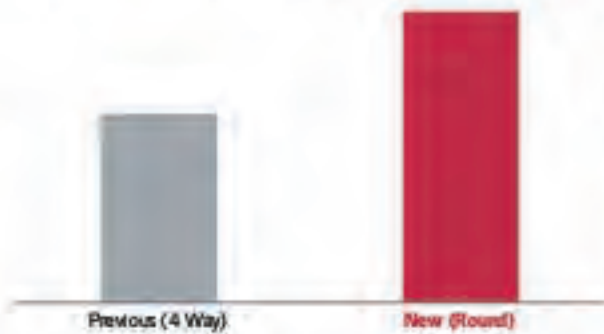

Full 3D Fan, Low noise



30% Faster in Cooling

Larger airflow rate, cooling rate is faster than 30%.



As Best in class, made from LG Chem's thin pipe is designed to help customer's demand. Operational environment: height 3.2m, 45 m³/h, cooling mode, high flow rate, horizontal air flow direction.

ARNU24GTAA / ARNU36GTAA / ARNU48GTAA



MODEL	UNIT	ARNU24GTAA	ARNU36GTAA	ARNU48GTAA
Cooling Capacity	kW	7.1	10.6	14.1
Heating Capacity	kW	8.0	11.9	15.9
Power Input (H / M / L)	W	44 / 36 / 29	63 / 47 / 36	98 / 70 / 44
Dimensions (W x H x D)	Body	1,050 x 330 x 1,050	1,050 x 330 x 1,050	1,050 x 330 x 1,050
	Shipping	1,137 x 395 x 1,132	1,137 x 395 x 1,132	1,137 x 395 x 1,132
Fan	Type	3D Turbo Fan	3D Turbo Fan	3D Turbo Fan
	Motor Output x Number	W	157 x 1	157 x 1
	Air Flow Rate (H / M / L), m3/min		22 / 21 / 19	27 / 24 / 21
Air Filter	Motor Type	BLDC	BLDC	BLDC
	Long life	Long life	Long life	Long life
Pipe Connections	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	kg	30	30	30
Sound Pressure Level (H / M / L)	dB(A)	39 / 37 / 34	43 / 39 / 37	47 / 44 / 39
Sound Power Level (H / M / L)	dB(A)	48 / 46 / 43	52 / 48 / 46	56 / 53 / 48
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Communication Cable (VCF-SB)	mm² x cores	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance tested under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnect piping length 75m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnect piping length 75m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU24GTAA	ARNU36GTAA	ARNU48GTAA
Drain Pump	-	○	-
Cassette Cover	-	-	-
Refrigerant Leakage Detector	-	FRDNV50	-
EEV Kit	-	-	-
Independent Power Module	-	FRPO	-
Robot Cleaner	-	-	-
Pre Filter (Washable)	-	○	-
Ion Generator	-	-	-
CO2 Sensor	-	-	-
Ventilation Kit	-	-	-
IR Receiver	-	-	-
Zone Controller	-	-	-
Dry Contact (with additional accessory)	FDRYCB000 (1 point contact), FDRYCB320 (Universal input), FDRYCB400 (2 poles input), FDRYCB500 (Modbus)		
External Input (1 Point)	-	○	-
Wi-Fi	-	PWFMD0200	-
Human detection sensor	-	-	-
Floor Temperature Sensor	-	-	-
Air cleaning kit	-	-	-
Elevation Grille	-	-	-

○: Applied, -: Not applied
 Option (Refer to model name details)



Features & Benefits

- Easy and flexible duct adjusts air volume with External Static Pressure (ESP) control function.
- Minimalst visibility (Hidden within ceiling) to blend seamlessly into any interior

Key Applications

- Office
- Retail
- Hotel
- Residential building

	DUCT	HIGH	MIDDLE	LOW
Smart	Wi-Fi	○	○	○
Energy Efficiency	ESP Control	○	○	○
	Drain Pump	○	○	○
	Timer (On / Off)	○	○	○
Comfort	Timer (Weekly)	○	○	○
	Two Thermostat Control	○	○	○
	Group Control	○	○	○

○: Applied, -: Not applied

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.



LG ThinQ

Search "LG ThinQ" on Google market or the App Store to download the app.



Easy Registration and Log-in

Follow the easy set-up steps that will activate LG ThinQ's user-friendly features



Simple operation for various functions



Div Off Current Temp





Mode, Set Temp



View Control


External Static Pressure (ESP) Control

User has easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air volume. No additional accessories are necessary to control air flow.

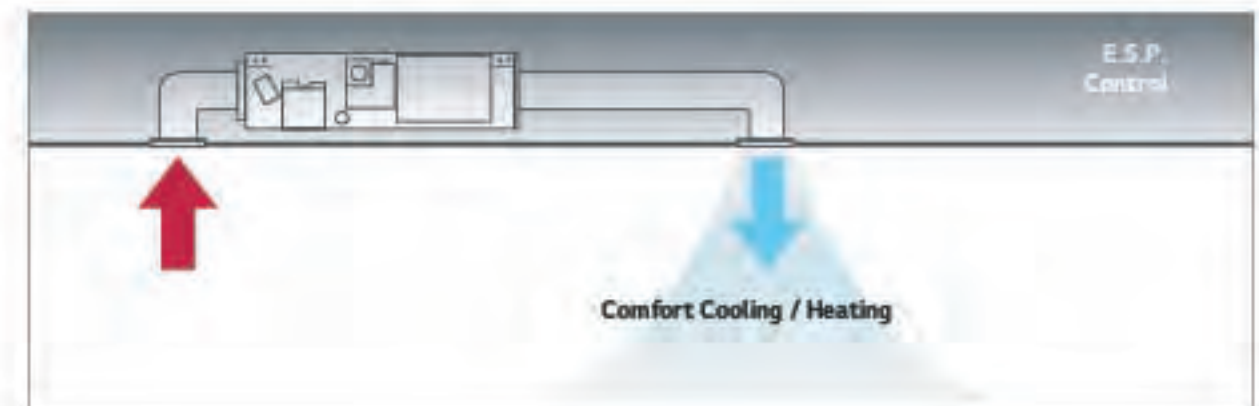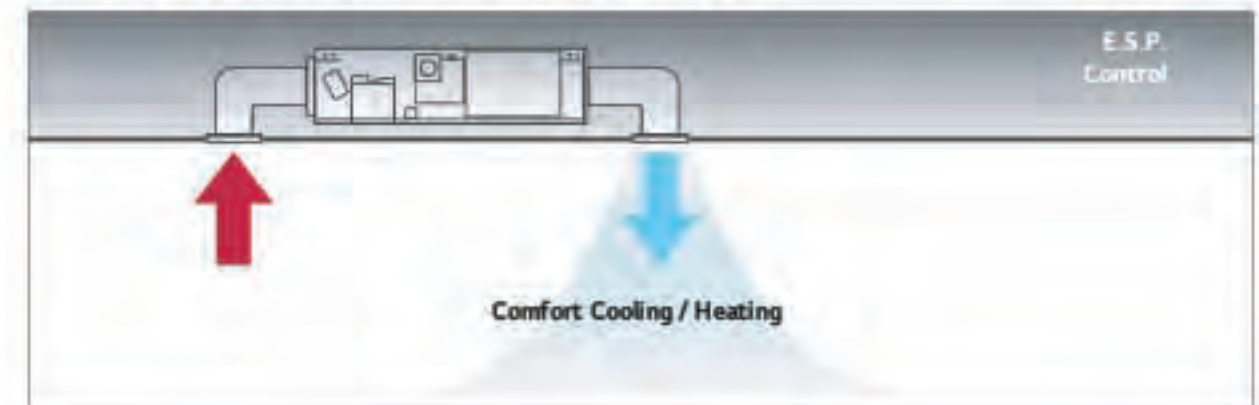

Static Pressure 11- Step Control


Depending on the installation environment, LG's ceiling concealed duct controls the static pressure with 11 steps to provide maximized comfort to any environment.

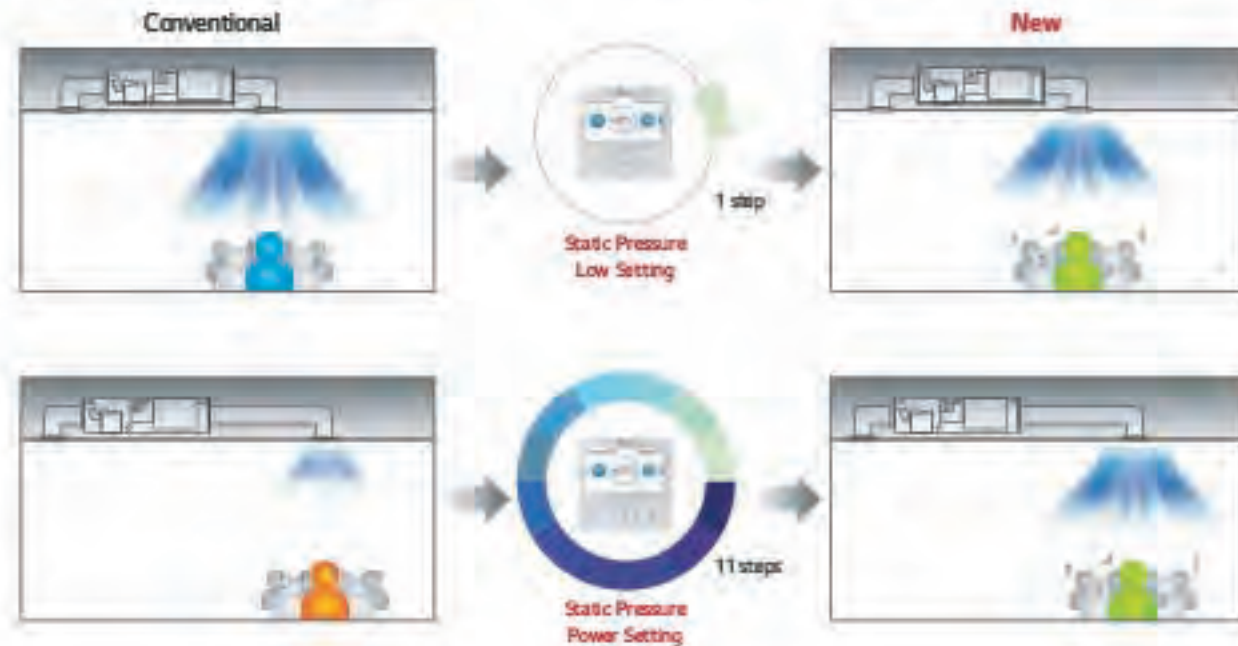


Energy Monitoring

Accumulated electric energy of the indoor unit can be identified with wired remote control, as well as with the central controller. This function is an advantage for energy management.

Install Scene

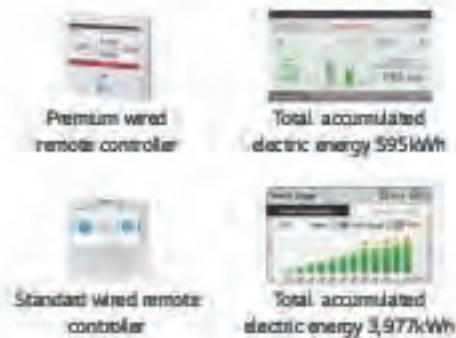


Apply for multistory building

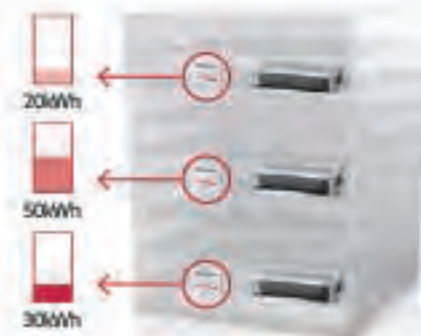

* Outdoor unit's accumulated electric energy / Using rate of individual indoor unit + indoor unit's accumulated electric energy is displayed in wired remote controller only when central controller digital integrating electricity meter and PDI are installed and PDI, outdoor unit and indoor unit are connected with power wire. Only total accumulated electric energy is displayed in standard wired remote controller. In premium wired remote controller, that are displayed into week / month / year.

Multiple Room Operation

Using a spiral duct (Embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously.

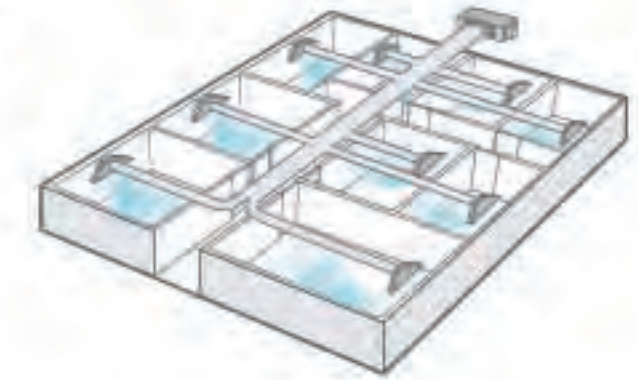

Filter Alert

The alarm is activated when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.


Remain Time Until Indoor Filter Cleaning + Alarm



Flexible Installation (Low Static Duct and Low Duct Slim Only)

The alarm is activated when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen.

Air intake at the rear or bottom

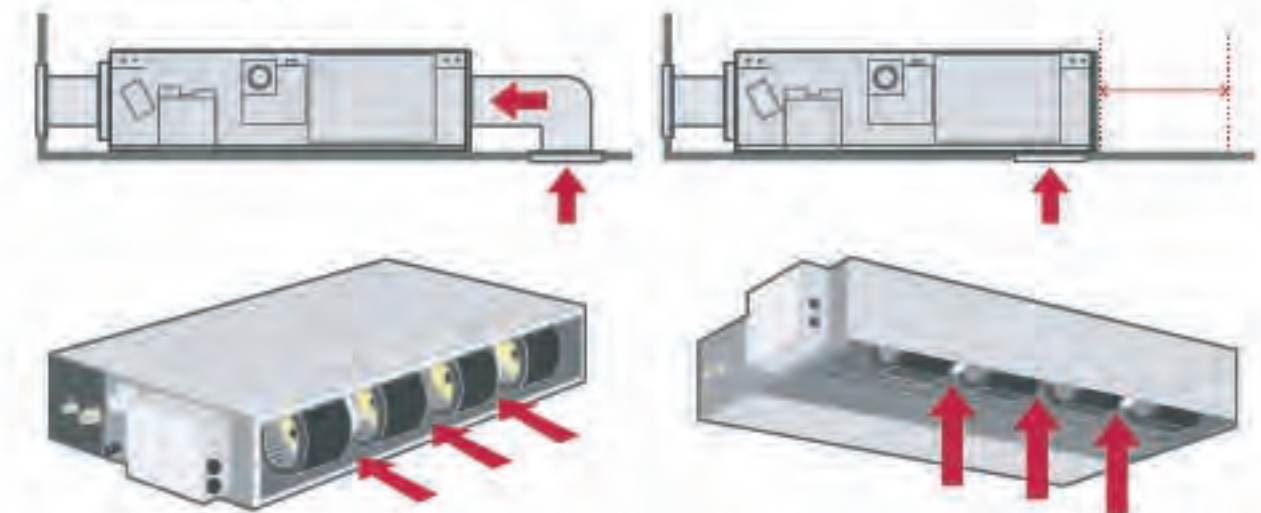

Minimized Height

New mid-static ducts provide ideal solution for installation in limited space.



Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.



1 Point External Input (On / Off Control)

Indoor unit can be controlled by external devices without dry contact, so customer can save cost of installation.

Connection between an indoor unit and external devices directly



* In case of heating mode (action: heat on / off control), dry contact (if required) is installed.

ARNU07GM1A4 / ARNU09GM1A4
ARNU12GM1A4 / ARNU15GM1A4
ARNU18GM1A4 / ARNU24GM1A4



MODEL	UNIT	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H/M/L)	W	39 / 30 / 25	49 / 32 / 26	46 / 38 / 31	67 / 53 / 46	85 / 63 / 55	91 / 74 / 59
Dimensions (W x H x D)	mm	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700
Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Motor Output x Number	W x No.	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1
Air Flow Rate (H/M/L)	m ³ /min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
External Static Pressure (High Mode)	mmHg (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
Air Flow Rate (H/M/L) (Standard Mode)	m ³ /min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
External Static Pressure (Standard Mode)	mmHg (Pa)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections							
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	kg	25.5	25.5	25.5	25.5	25.5	26.5
Sound Pressure Levels (H/M/L)	dB(A)	36 / 24 / 23	27 / 25 / 23	27 / 25 / 23	30 / 27 / 23	31 / 28 / 25	31 / 29 / 26
Sound Power Levels (H/M/L)	dB(A)	55 / 54 / 51	55 / 54 / 52	56 / 54 / 52	59 / 57 / 55	59 / 57 / 55	59 / 58 / 56
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
1. Performance listed under EN14511.
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Heat exchanger piping length 7.5m, Level difference of 0m.
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Heat exchanger piping length 7.5m, Level difference of 0m.
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Drain Pump				○		
Cassette Cover				○		
Refrigerant Leakage Detector				PRLDNVS0		
EEV Kit				PRK024A0 (-5.6kW)		
Independent Power Module				PRIP0		
Robot Cleaner				○		
Pre Filter (Washable)				○		
Ion Generator				○		
CO ₂ Sensor				○		
Ventilation Kit				○		
IR Receiver				PWLRV000		
Zone Controller				ABZCA		
Dry Contact (with additional accessory)				PORYCB000 (1 point contact), PORYCB320 (Universal input), PORYCB400 (2 points input), PORYCB500 (Modbus)		
External Input (1 point)				○		
Wi-Fi				PWFMB0200		

○: Applied, -: Not applied
Option / Refer to model name (if applicable)

ARNU28GM2A4 / ARNU36GM2A4
ARNU42GM2A4 / ARNU48GM3A4
ARNU54GM3A4



MODEL	UNIT	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Cooling Capacity	kW	8.2	10.6	12.3	14.1	15.8
Heating Capacity	kW	9.2	11.9	13.8	15.9	18.0
Power Input (H/M/L)	W	123 / 81 / 57	184 / 123 / 81	231 / 162 / 111	172 / 105 / 85	260 / 215 / 172
Dimensions (W x H x D)	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700
Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	350 x 1	350 x 1
Air Flow Rate (H/M/L)	m ³ /min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
External Static Pressure (High Mode)	mmHg (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
Air Flow Rate (H/M/L) (Standard Mode)	m ³ /min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
External Static Pressure (Standard Mode)	mmHg (Pa)	3 (49)	3 (49)	3 (49)	3 (49)	3 (49)
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections						
Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	kg	38.0	38.0	39.5	44.0	44.0
Sound Pressure Levels (H/M/L)	dB(A)	36 / 34 / 33	37 / 36 / 34	38 / 37 / 36	39 / 37 / 35	42 / 40 / 39
Sound Power Levels (H/M/L)	dB(A)	59 / 57 / 55	60 / 59 / 57	62 / 61 / 60	63 / 60 / 59	65 / 64 / 62
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
1. Performance listed under EN14511.
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Heat exchanger piping length 7.5m, Level difference of 0m.
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Heat exchanger piping length 7.5m, Level difference of 0m.
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Drain Pump				○	
Cassette Cover				○	
Refrigerant Leakage Detector				PRLDNVS0	
EEV Kit				-	
Independent Power Module				PRIP0	
Robot Cleaner				○	
Pre Filter (Washable)				○	
Ion Generator				○	
CO ₂ Sensor				○	
Ventilation Kit				○	
IR Receiver				PWLRV000	
Zone Controller				ABZCA	
Dry Contact (with additional accessory)				PORYCB000 (1 point contact), PORYCB320 (Universal input), PORYCB400 (2 points input), PORYCB500 (Modbus)	
External Input (1 point)				○	
Wi-Fi				PWFMB0200	

○: Applied, -: Not applied
Option / Refer to model name (if applicable)

ARNU76GB8A4 / ARNU96GB8A4



MODEL	UNIT	ARNU76GB8A4	ARNU96GB8A4
Cooling Capacity	kW	22.4	28.0
Heating Capacity	kW	25.2	31.5
Power Input (H / M / L)	W	765 / 500 / 500	800 / 750 / 750
Dimensions (W x H x D)	mm	1,562 x 460 x 688	1,562 x 460 x 688
Type		Sirocco Fan	Sirocco Fan
Motor Output x Number	W x No.	375 x 2	375 x 2
Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	60.0 / 50.0 / 50.0	72.0 / 64.0 / 64.0
External Static Pressure (High Mode)	mmAq (Pa)	22 (21.6)	22 (21.6)
Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	64.0 / 50.0 / 50.0	76.0 / 64.0 / 64.0
External Static Pressure (Standard Mode)	mmAq (Pa)	15 (14.7)	15 (14.7)
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø19.05 (3/4)	Ø22.2 (7/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight	kg	87.0	87.0
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0-1.5 x 2C	1.0-1.5 x 2C

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB; Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB; Interconnecting piping length 7.5m; Level difference of unit.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB; Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB; Interconnecting piping length 7.5m; Level difference of unit.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU76GB8A4	ARNU96GB8A4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNV50
EEV Kit		○
Independent Power Module		PRPO
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRN000
Zone Controller		ABZCA
Dry Contact (with additional accessory)		PDRYC800 (1 point contact), PDRYCB320 (Universal Input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWRMDD200

○: Applied, -: Not applied
 Option: Refer to model names in table

ARNU05GL4G4 / ARNU07GL4G4
 ARNU09GL4G4 / ARNU12GL5G4



MODEL	UNIT	ARNU05GL4G4	ARNU07GL4G4	ARNU09GL4G4	ARNU12GL5G4
Cooling Capacity	kW	1.8	2.2	2.8	3.6
Heating Capacity	kW	2.2	2.5	3.2	4
Power Input (H / M / L)	W	15 / 13 / 11	28 / 24 / 21	28 / 24 / 21	43 / 38 / 35
Dimensions (W x H x D)	mm	700 x 190 x 460	700 x 190 x 460	700 x 190 x 460	900 x 190 x 460
Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Motor Output x Number	W x No.	19 x 1	19 x 1	19 x 1	19 x 1 (x 4)
Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	7.0 / 6.3 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0
External Static Pressure (High Mode)	mmAq (Pa)	1 (10)	1 (10)	1 (10)	1 (10)
Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	7.0 / 6.3 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5	10.0 / 8.5 / 7.0
External Static Pressure (Standard Mode)	mmAq (Pa)	0(0)	0(0)	0(0)	0(0)
Motor Type		BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter
Liquid Side	mm (inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Gas Side	mm (inch)	12.7(1/2)	12.7(1/2)	12.7(1/2)	12.7(1/2)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25.4(1)	Ø25.4(1)	Ø25.4(1)	Ø25.4(1)
Weight	kg	14.6(32.2)	14.6(32.2)	14.6(32.2)	20(44.1)
Sound Pressure Levels (H / M / L)	dB(A)	25 / 24 / 22	26 / 24 / 22	28 / 25 / 22	29 / 27 / 25
Sound Power Levels (H / M / L)	dB(A)	37 / 36 / 34	38 / 37 / 33	40 / 37 / 34	41 / 38 / 38
Power Supply	Ø, V, Hz	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60
Transmission Cable	mm ²	1.0-1.5 x 2C	1.0-1.5 x 2C	1.0-1.5 x 2C	1.0-1.5 x 2C

Note:
 1. Performance listed under EN14511.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB; Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB; Interconnecting piping length 7.5m; Level difference of unit.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB; Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB; Interconnecting piping length 7.5m; Level difference of unit.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU05GL4G4	ARNU07GL4G4	ARNU09GL4G4	ARNU12GL5G4
Drain Pump				○
Cassette Cover				-
Refrigerant Leakage Detector				PRLDNV50
EEV Kit				PRGR024A0
Independent Power Module				PRPO
Robot Cleaner				-
Pre Filter (Washable)				○
Ion Generator				-
CO ₂ Sensor				-
Ventilation Kit				-
IR Receiver				PWLRN000
Zone Controller				ABZCA
Dry Contact (with additional accessory)				PDRYC800 (1 point contact), PDRYCB320 (Universal Input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)				○
Wi-Fi				PWRMDD200

○: Applied, -: Not applied
 Option: Refer to model names in table

ARNU15GL5G4 / ARNU18GL5G4
ARNU21GL6G4 / ARNU24GL6G4



MODEL	UNIT	ARNU15GL5G4	ARNU18GL5G4	ARNU21GL6G4	ARNU24GL6G4	
Cooling Capacity	kW	4.5	5.6	6.3	7.1	
Heating Capacity	kW	5	6.3	7.1	8	
Power Input (H / M / L)	Nominal W	54 / 45 / 36	57 / 39 / 30	65 / 50 / 42	81 / 59 / 43	
Dimensions (W x H x D)	Body	mm	300 x 190 x 460	300 x 190 x 460	1,100 x 190 x 460	
	Shipping	mm	1,125 x 255 x 561	1,125 x 255 x 561	1,325 x 255 x 561	
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	
	Motor Output x Number	W x No.	19 x 1+5x 1	19 x 1+5x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	125 / 100 / 8.5	150 / 125 / 100	175 / 140 / 120	200 / 160 / 120
	External Static Pressure (High Mode)	mmAq (Pa)	1 (10)	1 (10)	1 (10)	1 (10)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	125 / 100 / 8.5	150 / 125 / 100	175 / 140 / 120	200 / 160 / 120
	External Static Pressure (Standard Mode)	mmAq (Pa)	0(0)	0(0)	0(0)	0(0)
	Motor Type		BLDC	BLDC	BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	6.35(1/4)	6.35(1/4)	9.52(3/8)	
	Gas Side	mm (inch)	12.7(1/2)	12.7(1/2)	15.88(5/8)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25.4(1)	Ø25.4(1)	Ø25.4(1)	
Weight	Body kg	20(44.1)	20(44.1)	22(48.5)	22(48.5)	
Sound Pressure Levels (H / M / L)	dB(A)	32 / 29 / 27	35 / 32 / 29	35 / 30 / 29	36 / 33 / 29	
Sound Power Levels (H / M / L)	dB(A)	45 / 42 / 40	47 / 45 / 42	53 / 48 / 46	57 / 50 / 47	
Power Supply	Ø, V, Hz	220 ~ 230 ~ 240, 1,50/60	220 ~ 230 ~ 240, 1,50/60	220 ~ 230 ~ 240, 1,50/60	220 ~ 230 ~ 240, 1,50/60	
Transmission Cable	mm ²	1.0-1.5 x 2C	1.0-1.5 x 2C	1.0-1.5 x 2C	1.0-1.5 x 2C	

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of air.
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of air.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU15GL5G4	ARNU18GL5G4	ARNU21GL6G4	ARNU24GL6G4
Drain Pump			○	
Cassette Cover			-	
Refrigerant Leakage Detector			PRLDNVS0	
EEV Kit			PRGK024A0	
Independent Power Module			PRIP0	
Robot Cleaner			-	
Pre Filter (Washable)			○	
Ion Generator			-	
CO ₂ Sensor			-	
Ventilator Kit			-	
IR Receiver			PWLRVNO00	
Zone Controller			ABZCA	
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)			○	
Wi-Fi			PWFMD0200	

○: Applied - / Not applied
 □: Refer to model name table

ARNU05GL1G4 / ARNU07GL1G4
ARNU09GL1G4



MODEL	UNIT	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4	
Cooling Capacity	kW	1.7	2.2	2.8	
Heating Capacity	kW	1.9	2.5	3.2	
Power Input (H / M / L)	Nominal W	29 / 26 / 24	31 / 28 / 24	39 / 29 / 24	
Dimensions (W x H x D)	Body	mm	700 x 190 x 700	700 x 190 x 700	700 x 190 x 700
	Shipping	mm	862 x 255 x 781	862 x 255 x 781	862 x 255 x 781
Fan	Type		Sirocco Fan	Sirocco Fan	
	Motor Output x Number	W x No.	19 x 1	19 x 1	19 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	6.7 / 6.2 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	6.7 / 6.2 / 5.5	7.5 / 6.5 / 5.5	9.0 / 7.0 / 5.5
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)
	Motor Type		BLDC	BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight	Body kg	17.5	17.5	17.5	
Sound Pressure Levels (H / M / L)	dB(A)	25 / 24 / 22	26 / 24 / 22	28 / 25 / 22	
Sound Power Levels (H / M / L)	dB(A)	48 / 46 / 45	50 / 47 / 45	53 / 49 / 45	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of air.
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of air.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4
Drain Pump			○
Cassette Cover			-
Refrigerant Leakage Detector			PRLDNVS0
EEV Kit			PRGK024A0
Independent Power Module			PRIP0
Robot Cleaner			-
Pre Filter (Washable)			○
Ion Generator			-
CO ₂ Sensor			-
Ventilator Kit			-
IR Receiver			PWLRVNO00
Zone Controller			ABZCA
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 point)			○
Wi-Fi			PWFMD0200

○: Applied - / Not applied
 □: Refer to model name table

ARNU12GL2G4 / ARNU15GL2G4
ARNU18GL2G4



MODEL	UNIT	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Cooling Capacity	kW	3.6	4.5	5.6
Heating Capacity	kW	4.0	5.0	6.3
Power Input (H / M / L)	W	41 / 34 / 29	56 / 41 / 34	71 / 56 / 41
Dimensions (W x H x D)	mm	900 x 190 x 700	900 x 190 x 700	900 x 190 x 700
Type		Strocco Fan	Strocco Fan	Strocco Fan
Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1
Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)	2.54 (25)
Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)
Motor Type		BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)	Ø25 (1)
Weight Body	kg	23.0	23.0	23.0
Sound Pressure Levels (H / M / L)	dB(A)	30 / 27 / 25	33 / 30 / 28	35 / 32 / 29
Sound Power Levels (H / M / L)	dB(A)	50 / 47 / 46	54 / 51 / 47	56 / 54 / 51
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNV50	
EEV Kit		-	
Independent Power Module		PRPO	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		PWLRN000	
Zone Controller		ABZCA	
Dry Contact (with additional accessory)		PDRYC800 (1 point contact), PDRYC830 (Universal Input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)	
External Input (1 point)		○	
Wi-Fi		PWRMDD200	

○: Applied - / Not applied
 -: Option / Refer to model name in table

ARNU21GL3G4 / ARNU24GL3G4



MODEL	UNIT	ARNU21GL3G4	ARNU24GL3G4
Cooling Capacity	kW	6.2	7.1
Heating Capacity	kW	7.0	8.0
Power Input (H / M / L)	W	72 / 53 / 48	103 / 83 / 48
Dimensions (W x H x D)	mm	1,100 x 190 x 700	1,100 x 190 x 700
Type		Strocco Fan	Strocco Fan
Motor Output x Number	W x No.	19 x 2	19 x 2
Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)
Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)
Motor Type		BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight Body	kg	27.0	27.0
Sound Pressure Levels (H / M / L)	dB(A)	35 / 29 / 28	36 / 30 / 28
Sound Power Levels (H / M / L)	dB(A)	59 / 55 / 54	63 / 59 / 55
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance listed under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU21GL3G4	ARNU24GL3G4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNV50
EEV Kit		PRGR02840
Independent Power Module		PRPO
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRN000
Zone Controller		ABZCA
Dry Contact (with additional accessory)		PDRYC800 (1 point contact), PDRYC830 (Universal Input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWRMDD200

○: Applied - / Not applied
 -: Option / Refer to model name in table

ARNU07GM2A4 / ARNU09GM2A4
ARNU12GM2A4 / ARNU15GM2A4
ARNU18GM3A4



MODEL	UNIT	ARNU07GM2A4	ARNU09GM2A4	ARNU12GM2A4	ARNU15GM2A4	ARNU18GM3A4	
Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6	
Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3	
Power Input (H / M / L)	W	32 / 29 / 27	32 / 29 / 27	33 / 30 / 28	33 / 30 / 28	97 / 70 / 51	
Dimensions (W x H x D)	Body	mm	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	
Fan	Type		Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	
	Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	350 x 1	
	Air Flow Rate (H / M / L) (High static Mode - factory set)	m ³ /min	13.3 / 9.4 / 6.8	13.3 / 9.4 / 6.8	14.8 / 10.2 / 7.4	14.8 / 10.2 / 7.4	32.7 / 26.7 / 23.0
	External Static Pressure	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	13.3 / 9.4 / 6.8	13.3 / 9.4 / 6.8	14.8 / 10.2 / 7.4	14.8 / 10.2 / 7.4	32.7 / 26.7 / 23.0
	External Static Pressure	mmAq (Pa)	5 (49)	5 (49)	5 (49)	5 (49)	5 (49)
	Motor type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Pipe Connections	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)	
	Drain Pipe (Nominal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)	
Net Weight	kg	38	38	38	38	44	
Sound Pressure Levels (H / M / L)	dB(A)	33 / 33 / 32	33 / 33 / 32	34 / 33 / 32	34 / 33 / 32	38 / 36 / 34	
Sound Power Levels (H / M / L)	dB(A)	52 / 52 / 52	52 / 52 / 52	53 / 52 / 52	53 / 52 / 52	52 / 51 / 50	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	

- Notes:
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. An "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are not exact but are based on the following conditions. Refer to the Outdoor Unit Specifications for calculating the real capacity.
 - Cooling: Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (Outdoor - Indoor Unit) is zero.
 - Sound levels are measured at 50% External Static Pressure condition.
 - * Air flow rate could be different in accordance with External Static Pressure and setting value.

Accessories

CHASSIS	ARNU07GM2A4	ARNU09GM2A4	ARNU12GM2A4	ARNU15GM2A4	ARNU18GM3A4
Drain Pump			○		
Cassette Cover			-		
Refrigerant Leakage Detector			PRLDN50		
EEV Kit			-		
Independent Power Module			PRIP0		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			PWLRV000		
Zone Controller			AEZCA		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
WiFi			PWFM0200		

○ : Applied - Not applied
Option: Refer to model name table

ARNU24GM3A4 / ARNU28GM3A4
ARNU36GB8A4 / ARNU42GB8A4
ARNU48GB8A4



MODEL	UNIT	ARNU24GM3A4	ARNU28GM3A4	ARNU36GB8A4	ARNU42GB8A4	ARNU48GB8A4	
Cooling Capacity	kW	7.1	8.2	10.6	12.3	14.1	
Heating Capacity	kW	8.0	8.2	11.9	13.8	15.5	
Power Input (H / M / L)	W	109 / 83 / 60	109 / 83 / 60	420 / 403 / 478	528 / 497 / 465	528 / 505 / 483	
Dimensions (W x H x D)	Body	mm	1,250 x 360 x 700	1,250 x 360 x 700	1,562 x 460 x 688	1,562 x 460 x 688	
Fan	Type		Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	
	Motor Output x Number	W x No.	500 x 1	500 x 1	375 x 2	375 x 2	
	Air Flow Rate (H / M / L) (High static Mode - factory set)	m ³ /min	35.5 / 30.6 / 26.2	35.5 / 30.6 / 26.2	49.0 / 37.3 / 30.1	54.2 / 41.3 / 31.8	57.2 / 43.0 / 34.0
	External Static Pressure	mmAq (Pa)	6 (59)	6 (59)	18 (176)	18 (176)	18 (176)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	35.5 / 30.6 / 26.2	35.5 / 30.6 / 26.2	53.7 / 49.5 / 43.9	55.6 / 50.6 / 45.0	58.0 / 52.3 / 47.3
	External Static Pressure	mmAq (Pa)	5 (49)	5 (49)	9 (88)	9 (88)	9 (88)
	Motor type		BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	Ø9.52 (3/8)	
Pipe Connections	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø19.05 (3/4)	Ø19.05 (3/4)	
	Drain Pipe (Nominal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)	
Net Weight	kg	44	44	67	67	67	
Sound Pressure Levels (H / M / L)	dB(A)	39 / 37 / 35	39 / 37 / 35	46 / 45 / 42	47 / 46 / 43	47 / 46 / 44	
Sound Power Levels (H / M / L)	dB(A)	53 / 52 / 51	53 / 52 / 51	65 / 64 / 62	66 / 65 / 63	66 / 65 / 64	
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	

- Notes:
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. An "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard. Sound power level is measured on the rated condition in the reverberation room by ISO 3741 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are not exact but are based on the following conditions. Refer to the Outdoor Unit Specifications for calculating the real capacity.
 - Cooling: Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating: Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (Outdoor - Indoor Unit) is zero.
 - Sound levels are measured at 50% External Static Pressure condition.
 - * Air flow rate could be different in accordance with External Static Pressure and setting value.

Accessories

CHASSIS	ARNU24GM3A4	ARNU28GM3A4	ARNU36GB8A4	ARNU42GB8A4	ARNU48GB8A4
Drain Pump			○		
Cassette Cover			-		
Refrigerant Leakage Detector			PRLDN50		
EEV Kit			-		
Independent Power Module			PRIP0		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			-		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			PWLRV000		
Zone Controller			AEZCA		
Dry Contact (with additional accessory)			PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 point)			○		
WiFi			PWFM0200		

○ : Applied - Not applied
Option: Refer to model name table

Fresh Outdoor Air Supply

The LG Fresh Air Intake Unit (FAU) is the alternative solution for ventilation, which supplies the fresh outdoor air indoors as well as and simultaneously cool and heats the air inside. It means the indoor space can have positive air pressure consistently, which can block cold, hot or contaminated air from outside. This allows the indoor space to have consistent positive air pressure blocking cold air.



MULTI V 5 Outdoor unit

Economic Operation

Natural outdoor air is utilized as seasons change for cost efficiency.

Spring Season



MULTI V 5 Outdoor unit

Autumn Season



MULTI V 5 Outdoor unit

Installation Scene



- 1 Inlet Hood
- 2 Fresh Air Intake Unit
- 3 Door
- 4 Intake Air Duct
- 5 Exhaust Fan

ARNU76GB8Z4 / ARNU96GB8Z4



MODEL	UNIT	ARNU76GB8Z4	ARNU96GB8Z4
Cooling Capacity	kW	22.4	28.0
Heating Capacity	kW	21.4	28.7
Power Input (H / M / L)	W	230 / 200 / 200	360 / 230 / 230
Dimensions (W x H x D)	mm	1,562 x 460 x 688	1,562 x 460 x 688
Type		Sirocco Fan	Sirocco Fan
Motor Output x Number	W x No.	375 x 1	375 x 1
Air Flow Rate (H / M / L) (High Mode-Factory Set)	m³/min	23.7 / 13.2 / 13.2	35.7 / 23.7 / 23.7
External Static Pressure	mmAq (Pa)	22 (216)	22 (216)
Motor Type		BLDC	BLDC
Air Filter		Long Life Filter	Long Life Filter
Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø19.05 (3/4)	Ø22.2 (7/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø25 (1)	Ø25 (1)
Weight Body	kg	73.0	73.0
Sound Pressure Levels (H / M / L)	dB(A)	43 / 43 / 43	47 / 45 / 45
Sound Power Levels (H / M / L)	dB(A)	70 / 67 / 67	72 / 70 / 70
Power Supply	Ø, V, Hz	1, 230-240, 50	1, 220-240, 50
Transmission Cable	mm²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

- Note: 1. Performance tested under EN14511.
 2. Capacity are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB; Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB; Interconnecting piping length 7.5 m; Level difference of zero.
 - Heating: Indoor temp. 20°C (68°F) DB / 13°C (55°F) WB; Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB; Interconnecting piping length 7.5 m; Level difference of zero.
 3. Due to our policy of innovation, some specifications may be changed without notification.

CAUTION

1. Operation range (Cooling: 5°C ~ 43°C, Heating: -5°C ~ 43°C)
2. Installation of exhaust fan is recommended for a sealed room.
3. Indoor Unit Connection

NO.	CONNECTION CONDITION	CO-MENT/NOTICE
1	Fresh air intake units only are connected with outdoor units.	1) The total capacity of fresh air intake unit should be 50 ~ 100% of outdoor unit. 2) The number of fresh air intake is 4 units.
2	Mixture connection with general indoor unit and fresh air intake units.	1) The total capacity of outdoor units (Standard Indoor Unit + Fresh Air Intake Unit) should be 50 ~ 100% of outdoor unit. 2) The total capacity of fresh air intake unit should be less than 30% of the total capacity of indoor units.

Accessories

CHASSIS	ARNU76GB8Z4	ARNU96GB8Z4
Drain Pump		○
Cassette Cover		○
Refrigerant Leakage Detector		PRLDV50
EEV Kit		
Independent Power Module		PRFD
Robot Cleaner		○
Pre Filter (Washable)		○
Ion Generator		○
CO ₂ Sensor		○
Ventilation Kit		○
IR Receiver		PWLRW00
Zone Controller		○
Dry Contact (with additional accessory)		PDRCB000 (1 point contact), PDRCB320 (Universal input), PDRCB400 (2 points input), PDRCB500 (Modbus)
External Input (1 point)		○
Wi-Fi		PWRM0200

- : Applied - Not applied
 ○: Option (Refer to model name in table)



Features & Benefits

- Modern design with V-shape and black vane
- Powerful air speed and volume can reach up to 15m

Key Applications

- Retail
- Restaurant
- Shop

	CEILING	CEILING & FLOOR CONVERTIBLE	CEILING SUSPENDED
Smart	Wi-Fi	○	○
Fast Cooling & Heating	Jet Cool	○	○
	Sleep mode	○	○
	Timer (On / Off)	○	○
Comfort	Timer (Weekly)	○	○
	Two thermostat control	○	○
	Group control	○	○

○ Applied - | Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

LG ThinQ
 Search "LG ThinQ" on Google market or the App Store to download the app.

Easy Registration and Login
 Follow the easy set-up steps that will activate LG ThinQ's impressive features.

Flexible

The ceiling and floor models can be installed either on the ceiling or on the floor.




Filter Change Alarm

The filter change alarm informs you when the unit has been operating for 2,400 hours.



Air flow Direction Control

Vertical air flow direction can be adjusted using remote controller, and horizontal air flow direction can be adjusted manually.

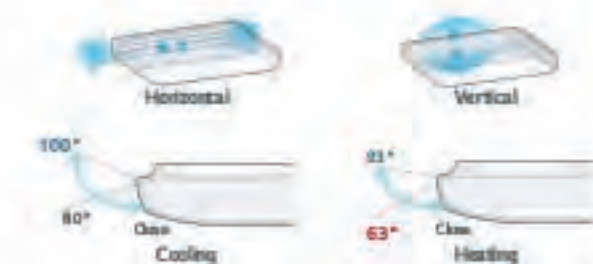

Differentiated Design

Modern elegance design with V-shape and black vane is appropriate for any commercial space. It received IF Design Award.



Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2m in height from floor, 15m away from ceiling.



One Touch & 2 Piece Filter

Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.



Two Thermistors Control

Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.



ARNU09GVEA4 / ARNU12GVEA4



MODEL	UNIT	ARNU09GVEA4	ARNU12GVEA4
Cooling Capacity	kW	2.8	3.6
Heating Capacity	kW	3.2	4.0
Power Input (H / M / L)	Nominal W	19 / 15 / 11	25 / 19 / 15
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Dimensions (W x H x D)	Body mm	900 x 490 x 200	900 x 490 x 200
	Shipping mm	975 x 279 x 562	975 x 279 x 562
Fan	Type	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No. 27 x 1	27 x 1
	Air Flow Rate (H / M / L)	m ³ /min 7.6 / 6.9 / 6.2	9.2 / 7.6 / 6.9
	cfm	268 / 244 / 219	325 / 268 / 244
	Motor Type	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
	Liquid Side mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)
Pipe Connections	Gas Side mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.) mm (inch)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body kg	13.3	13.3
Sound Pressure Levels (H / M / L)	dB(A)	36 / 32 / 28	38 / 36 / 30
Sound Power Levels (H / M / L)	dB(A)	55 / 51 / 45	56 / 55 / 49
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ² x core	1.0 - 1.5 + 2C	1.0 - 1.5 + 2C

Note 1: Performance tested under EN14181.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of 0m.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 0°C (32°F) WB, Interconnecting piping length 7.5m, Level difference of 0m.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU09GVEA4	ARNU12GVEA4
Drain Pump	-	-
Refrigerant Leakage Detector	-	PRLDNV50
EEV Kit	-	FRG024A0
Independent Power Module	-	FRF0
Plasma Kit	-	-
Robot Cleaner	-	-
Pre Filter (Washable)	-	Ø
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
R Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 point)	Ø	
Wi-Fi	PWRMDD200 ¹	

Ø: Applied, -: Not Applied.
 1: Option. Refer to model name in table.

ARNU18GV1A4 / ARNU24GV1A4
 ARNU36GV2A4 / ARNU48GV2A4



MODEL	UNIT	ARNU18GV1A4	ARNU24GV1A4	ARNU36GV2A4	ARNU48GV2A4
Cooling Capacity	kW	5.6	7.1	10.6	14.1
Heating Capacity	kW	6.3	8.0	11.9	15.9
Power Input (H / M / L)	Nominal W	23 / 20 / 17	25 / 21 / 17	84 / 77 / 66	91 / 79 / 66
Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body mm	1,200 x 235 x 690	1,200 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
	Shipping mm	1,315 x 320 x 772	1,315 x 320 x 772	1,715 x 320 x 772	1,715 x 320 x 772
Fan	Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
	Motor Output x Number	W x No. 85.9 x 1	85.9 x 1	125 x 1	125 x 1
	Air Flow Rate (H / M / L)	m ³ /min 13.3 / 12.5 / 12.0	14.0 / 13.0 / 12.0	27.0 / 24.0 / 20.0	29.0 / 24.0 / 20.0
	Motor Type	BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)
	Gas Side mm (inch)	Ø12.7 (1/2)	Ø15.88 (5/8)	Ø15.88 (5/8)	Ø15.88 (5/8)
	Drain Pipe (Internal Dia.) mm (inch)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)	Ø16 (5/8)
Weight	Body kg	29.0	29.0	37.0	37.0
Sound Pressure Levels (H / M / L)	dB(A)	36 / 34 / 33	37 / 35 / 33	46 / 46 / 44	49 / 47 / 44
Sound Power Levels (H / M / L)	dB(A)	61 / 59 / 56	62 / 59 / 56	68 / 66 / 64	68 / 67 / 66
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ² x core	1.0 - 1.5 + 2C	1.0 - 1.5 + 2C	1.0 - 1.5 + 2C	1.0 - 1.5 + 2C

Note 1: Performance tested under EN14181.
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of 0m.
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 0°C (32°F) WB, Interconnecting piping length 7.5m, Level difference of 0m.
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU18GV1A4	ARNU24GV1A4	ARNU36GV2A4	ARNU48GV2A4
Drain Pump	-	-	-	-
Cassette Cover	-	-	-	-
Refrigerant Leakage Detector	-	-	PRLDNV50	-
EEV Kit	-	-	-	-
Independent Power Module	-	-	FRF0	-
Robot Cleaner	-	-	-	-
Pre Filter (Washable)	-	-	Ø	-
Ion Generator	-	-	-	-
CO ₂ Sensor	-	-	-	-
Ventilation Kit	-	-	-	-
R Receiver	-	-	-	-
Zone Controller	-	-	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)			
External Input (1 point)	Ø			
Wi-Fi	PWRMDD200			

Ø: Applied, -: Not Applied.
 1: Option. Refer to model name in table.



Features & Benefits

- 6 way flexible piping
- Cold draft window protection
- Condensation protection

Key Applications

- Residential building
- Historical building
- Hotel

	FLOOR STANDING	CONSOLE	FLOOR STANDING
Smart	Wi-Fi	○	○
Energy Efficiency	Jet Cool	-	○
Health	Ionizer	○	-
Fast Cooling & Heating	Jet Cool	○	-
	Sleep Mode	○	○
	Timer (On / Off)	○	○
Comfort	Timer (Weekly)	○	○
	Two Thermostat Control	○	○
	Group Control	○	○

○: Applied - / Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

LG ThinQ
 Search "LG ThinQ" on Google market or the App Store to download the app.



Air Flow Direction Change

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.




Cold Draft Protection

The console protects cold draft from windows to provide comfortable environment.



5-Step Vane Control

There are 5 different stages to control air flow direction.

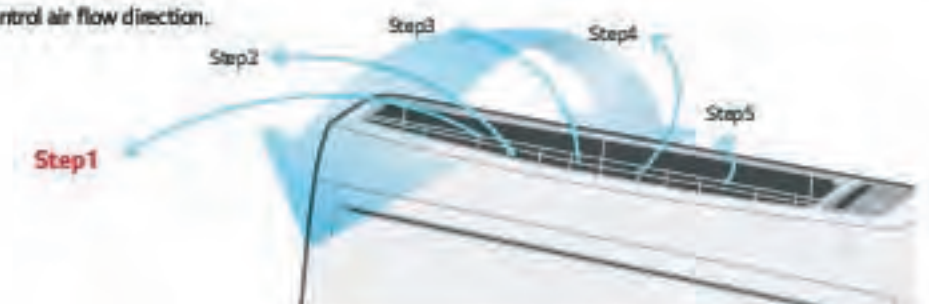

ARNU07GQAA4 / ARNU09GQAA4



MODEL	UNIT	ARNU07GQAA4	ARNU09GQAA4
Cooling Capacity	kW	2.2	2.8
Heating Capacity	kW	3.5	3.2
Power Input (H / M / L)	Nominal W	15 / 12 / 10	15 / 12 / 10
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Dimensions (W x H x D)	mm	700 x 600 x 210	700 x 600 x 210
Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type	Turbo fan	Turbo fan
	Motor Output x Number	W x No.	48 x 1
	Air Flow Rate (H / M / L)	m³/min	6.7 / 5.9 / 4.8
	Motor Type		BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)
Weight	Body	kg	14.0
Sound Pressure Levels (H / M / L)	dB(A)	37 / 34 / 28	37 / 34 / 28
Sound Power Levels (H / M / L)	dB(A)	53 / 50 / 44	53 / 50 / 44
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance tested under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GQAA4	ARNU09GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	FRLDNVS0	-
EEV Kit	FRGK024A0	-
Independent Power Module	PRPO	-
Robot Cleaner	-	-
Pre Filter (Washable)	○	○
Ion Generator	○	○
CO2 Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYC8000 (1 point contact), PDRYC8320 (Universal input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD0200	

○: Applied, -: Not Applied
 Check Refer to model name in table.

ARNU12GQAA4 / ARNU15GQAA4



MODEL	UNIT	ARNU12GQAA4	ARNU15GQAA4
Cooling Capacity	kW	3.6	4.5
Heating Capacity	kW	4.0	5.0
Power Input (H / M / L)	Nominal W	18 / 15 / 13	24 / 19 / 17
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Dimensions (W x H x D)	mm	700 x 600 x 210	700 x 600 x 210
Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type	Turbo fan	Turbo fan
	Motor Output x Number	W x No.	48 x 1
	Air Flow Rate (H / M / L)	m³/min	7.5 / 5.9 / 4.8
	Motor Type		BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø6.35 (1/4)
	Gas Side	mm (inch)	Ø12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)
Weight	Body	kg	14.0
Sound Pressure Levels (H / M / L)	dB(A)	39 / 34 / 28	42 / 37 / 31
Sound Power Levels (H / M / L)	dB(A)	56 / 50 / 44	58 / 53 / 50
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
 1. Performance tested under EN14511
 2. Capacities are based on the following conditions:
 - Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 - Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
 3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU12GQAA4	ARNU15GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	FRLDNVS0	-
EEV Kit	FRGK024A0	-
Independent Power Module	PRPO	-
Robot Cleaner	-	-
Pre Filter (Washable)	○	○
Ion Generator	○	○
CO2 Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with additional accessory)	PDRYC8000 (1 point contact), PDRYC8320 (Universal input), PDRYC8400 (2 points input), PDRYC8500 (Modbus)	
External Input (1 point)	○	
Wi-Fi	PWFMD0200	

○: Applied, -: Not Applied
 Check Refer to model name in table.

ARNU07GCEA4 / ARNU09GCEA4
ARNU12GCEA4 / ARNU15GCEA4
ARNU18GCEA4 / ARNU24GCEA4



8 A | Floor Standing with side

MODEL	UNIT	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCEA4	ARNU24GCEA4
Cooling Capacity	KW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity	KW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	mm	1,067 x 625 x 210	1,067 x 625 x 210	1,067 x 625 x 210	1,067 x 625 x 210	1,345 x 625 x 210	1,345 x 625 x 210
Shipping	mm	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,432 x 705 x 289	1,432 x 705 x 289
Fan							
Type		Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan
Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
Air Flow Rate (H / M / L)	m ³ /min	8.5 / 7.5 / 6.5	8.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter							
Pre Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)
Weight	kg	27.0	27.0	27.0	27.0	34.0	34.0
Sound Pressure Levels (H / M / L)	dB(A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)	dB(A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	57 / 54 / 50	61 / 57 / 54
Power Supply	Q, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
1. Performance listed under EN14511
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCEA4	ARNU24GCEA4
Drain Pump	-	-	-	-	-	-
Cassette Cover	-	-	-	-	-	-
Refrigerant Leakage Detector	-	FRLEW50	-	-	FRLEW50	-
EEV Kit	-	FRSK024A0	-	-	-	-
Independent Power Module	-	FRPO	-	-	FRPO	-
Robot Cleaner	-	-	-	-	-	-
Pre Filter (Washable)	-	○	-	-	○	-
Ion Generator	-	-	-	-	-	-
CO2 Sensor	-	-	-	-	-	-
Ventilation Kit	-	-	-	-	-	-
IR Receiver	-	PWLRV000	-	-	PWLRV000	-
Zone Controller	-	-	-	-	-	-
Dry Contact (with additional accessory)	-	PDRYC000 (1 point input), PDRYC320 (Universal input), PDRYC400 (2 points input), PDRYC500 (Modbus)				
External Input (1 point)	-	○	-	-	○	-
Wi-Fi	-	PWFMD0200	-	-	PWFMD0200	-

○: Applied, -: Not Applied
Option refers to model name in table

ARNU07GCEU4 / ARNU09GCEU4
ARNU12GCEU4 / ARNU15GCEU4
ARNU18GCEU4 / ARNU24GCEU4



8 U | Floor Standing with front

MODEL	UNIT	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCEU4	ARNU24GCEU4
Cooling Capacity	KW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity	KW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	mm	1,067 x 625 x 210	1,067 x 625 x 210	1,067 x 625 x 210	1,067 x 625 x 210	1,345 x 625 x 210	1,345 x 625 x 210
Shipping	mm	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,333 x 702 x 260	1,333 x 702 x 260
Fan							
Type		Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan	Strocco Fan
Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
Air Flow Rate (H / M / L)	m ³ /min	8.5 / 7.5 / 6.5	8.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter							
Pre Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Liquid Side	mm (inch)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø6.35 (1/4)	Ø9.52 (3/8)
Gas Side	mm (inch)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø12.7 (1/2)	Ø15.88 (5/8)
Drain Pipe (Internal Dia.)	mm (inch)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)	Ø12 (15/32)
Weight	kg	20.0	20.0	20.0	20.0	26.0	26.0
Sound Pressure Levels (H / M / L)	dB(A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)	dB(A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	57 / 54 / 50	61 / 57 / 54
Power Supply	Q, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50
Transmission Cable	mm ²	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

Note:
1. Performance listed under EN14511
2. Capacities are based on the following conditions:
- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero
- Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero
3. Due to our policy of innovation, some specifications may be changed without notification.

Accessories

CHASSIS	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCEU4	ARNU24GCEU4
Drain Pump	-	-	-	-	-	-
Cassette Cover	-	-	-	-	-	-
Refrigerant Leakage Detector	-	FRLEW50	-	-	FRLEW50	-
EEV Kit	-	FRSK024A0	-	-	-	-
Independent Power Module	-	FRPO	-	-	FRPO	-
Robot Cleaner	-	-	-	-	-	-
Pre Filter (Washable)	-	○	-	-	○	-
Ion Generator	-	-	-	-	-	-
CO2 Sensor	-	-	-	-	-	-
Ventilation Kit	-	-	-	-	-	-
IR Receiver	-	PWLRV000	-	-	PWLRV000	-
Zone Controller	-	-	-	-	-	-
Dry Contact (with additional accessory)	-	PDRYC000 (1 point input), PDRYC320 (Universal input), PDRYC400 (2 points input), PDRYC500 (Modbus)				
External Input (1 point)	-	○	-	-	○	-
Wi-Fi	-	PWFMD0200	-	-	PWFMD0200	-

○: Applied, -: Not Applied
Option refers to model name in table

Controller Product		Premium	Standard III	Standard II	Simple	Simple (New)	Webes	Dry Contact				
Ceiling Mounted Cassette	4 Way APRU-A4 APRU-D4	○	○	○	○	○	○	○	○	○	○	○
	2 Way / 1 Way APRU-D4 APRU-C4	○	○	○	○	○	○	○	○	○	○	○
Ceiling Control Unit	RoundCCT APRU-A4	○	○	○	○	○	○	○	○	○	○	○
	High Grade APRU-A4	○	○	○	○	○	△	○	○	○	○	○
Floor Standing	High / Mid Grade APRU-A4	○	○	○	○	○	△	○	○	○	○	○
	Low Grade APRU-G4	○	○	○	○	○	△	○	○	○	○	○
FALL (Fresh Air Intake)	APRU-Z4	○	○	○	○	○	△	○	○	○	○	○
Convertible & Ceiling Suspended	APRU-A4	○	○	○	○	○	○	○	○	○	○	○
CONSOLE	APRU-A4	○	○	○	○	○	○	○	○	○	○	○
	APRU-A4 APRU-U4	○	○	○	○	○	○	○	○	○	○	○
Wall Mounted	APRU-A4	○	○	○	○	○	○	○	○	○	○	○
	APRU-A4 APRU-C4 APRU-H4	○	○	○	○	○	○	○	○	○	○	○
HYDRO-RT ¹⁾	APRU-A4	-	-	-	-	-	○	-	○	-	-	
Ventilation	Energy Recovery Ventilator	○	○	○	-	-	○	-	○	-	○	○
	Energy Recovery Ventilator with CO ₂ off	○	○	○	-	-	○	-	○	-	○	○
AI/BI Communication Kit		○	○	○	-	-	△	-	-	-	-	

○: Compatible, △: Not wired remote controller / If receiver, -: Not compatible, ?) It has a separate remote controller.

Controller Name Model Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Module
	Premium	Standard III	Standard II	Simple	Simple (New)		
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTB110	PREMTB001 PREMTB01	PQRCVCL00 PQRCVCL00W	PQRCHCA00 PQRCHCA00W	PALSBE21H (HP)	PVFM00100
On / Off	○	○	○	○	○	○	○
Fan Speed Control	○	○	○	○	○	○	○
Temperature Setting	○	○	○	○	○	○	○
Mode Change	○	○	○	○	-	○	○
Auto Swing	○	○	○	○	○	○	○
Vane Control (Lower Angle)	○	○	○	○	○	○	○
ESP (External Static Pressure)	○	○	○	○	○	-	-
Electric Failure Compensation	○	○	○	○	○	-	○
Indoor Temperature Display	○	○	○	○	○	○	-
ALL Button Lock (Child Lock)	○	○	○	○	○	-	-
Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Additional Mode Setting ¹⁾	○	○	○	-	-	-	-
Time Display	○	○	○	-	-	○	-
Humid Display	○	○	-	-	-	-	-
Advanced Lock (mode, set point, set point range, on/off Lock)	Advanced Lock	Advanced Lock	-	-	-	-	-
Advanced							
Filter Sign	○	○	○	-	-	-	-
Energy Management ²⁾	○	○	○	-	-	-	-
Dual Set Point	○	○	-	-	-	-	-
Human Detection	-	○	-	-	-	-	-
Temp, Humidity Compensation	○	○	-	-	-	-	-
Wi-Fi AP mode setting	○	○	○	○	○	○	-
Operation Status LED	○	○	○	○	○	-	-
Wireless Remote Controller Receiver	○3)	-	○3)	○3)	○3)	-	-
ETC							
Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.8 inch mono	2.8 inch mono	2 inch mono	-
Size (W x H x D, mm)	137 x 121 x 165	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26	48 x 68 x 14
Black Control for Screen Saver	○	○	-	-	-	-	-

○: Applied, -: Not Applied
 1) It might not be included or optional at the product.
 2) Central control (PACED200 / PACSSA00 / PACPSA00 / PIAAWB00) and PDI (PQPLD1540 / PPMR0002) should be installed for this function.
 3) For calling type (A) Note
 - Indoor unit should have functions requested by the controller.
 - For more detail, please refer to the manual of product. (http://panasonic.com/indoor/indoor/Manual)

192-201

HOT WATER SOLUTION

HYDRO KIT




HYDRO KIT

Features & Benefits


- Lower operation cost compared to fossil fuel-based systems such as boilers
- More energy saving through MULTI V heat recovery system

Key Applications

- Where Hot Water is needed such as domestic Hot Water, In-floor or radiant heat. Where cold water is needed such as Fan coil unit and chilled beam

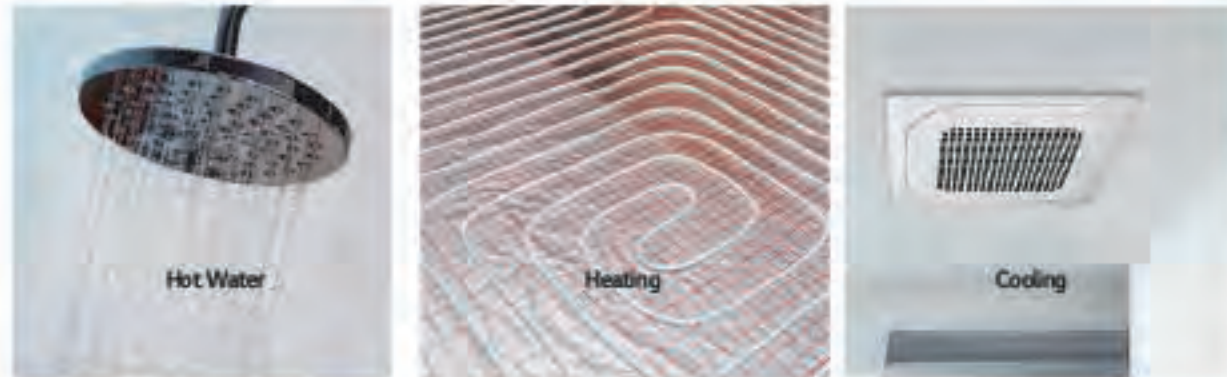

Radiant Heating / Cooling



Fan Coil Unit Heating / Cooling




Hot Water / Cold Water



Eco-conscious Solution

Green energy solution through the reduction of CO₂ emissions.

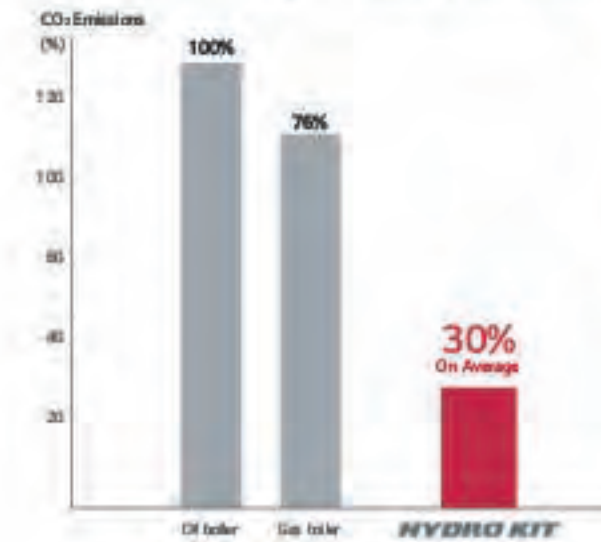


Space Saving

Wall mounted hydro kit with Multi V S outdoor is suitable for residential application with its compact size and design.



Total Solution

Total solution provided with heat pump, air conditioning (Cooling by refrigerant and cold water / heating by refrigerant hot water) and domestic hot water supply.

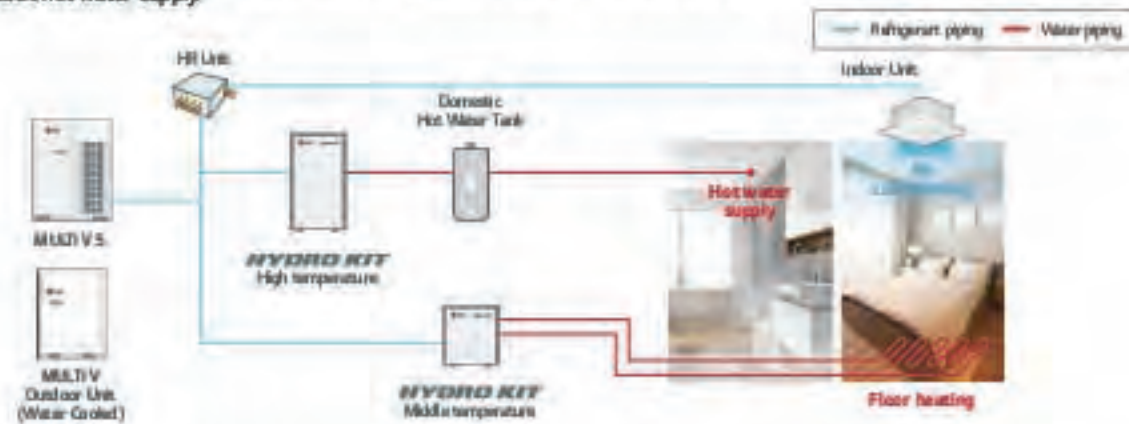

CONVENIENCE

EFFICIENCY

HOT WATER SOLUTION HYDRO KIT

CONVENIENCE



Compatible with compact R32 Multi V S

Product Volume (m³)



Cost Savings with High Efficiency

Equivalent installation cost of traditional boiler with reduced operational costs.


1# Proposal MULTI V 5 HYDRO KIT

- (Air Conditioning + Hot Water Supply + Floor Heating)
- 2# Proposal MULTI V 5 Air-Conditioning + Gas Boiler (Hot Water Supply + Floor Heating)
- 3# Proposal MULTI V 5 Air-Conditioning + Oil Boiler (Hot Water Supply + Floor Heating)


Analysis Conditions

- Building Type : Dormitory, Flats
- Cooling / Floor Heating / Sanitary Hot Water for 10 years
- Cooling : MULTI V Indoor Unit
- Floor Heating : Medium Temp. HYDRO KIT (1ea)
- Sanitary Hot Water : High Temp. HYDRO KIT (2ea), Sanitary Hot Water Tank
- Electricity Cost : Average Cost in EU
- Gas Cost : Average Cost in EU
- Oil Cost : Average Cost in EU


Initial Costs

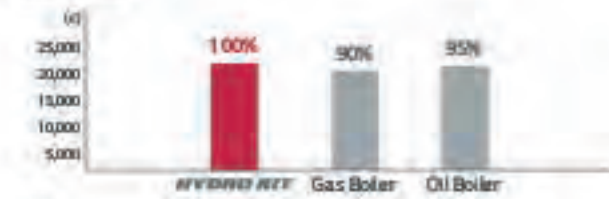

Annual Operating Costs

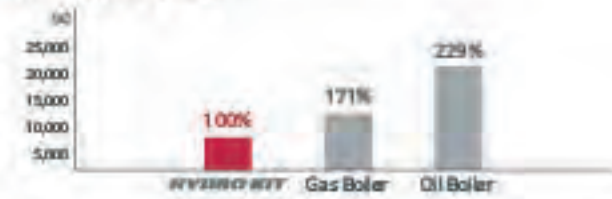


LCC

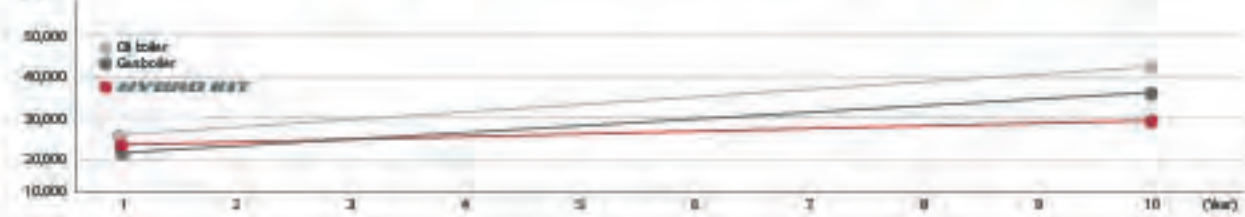

Energy Savings through Heat Recovery

Conventional

Absorbed heat is released to outdoor air

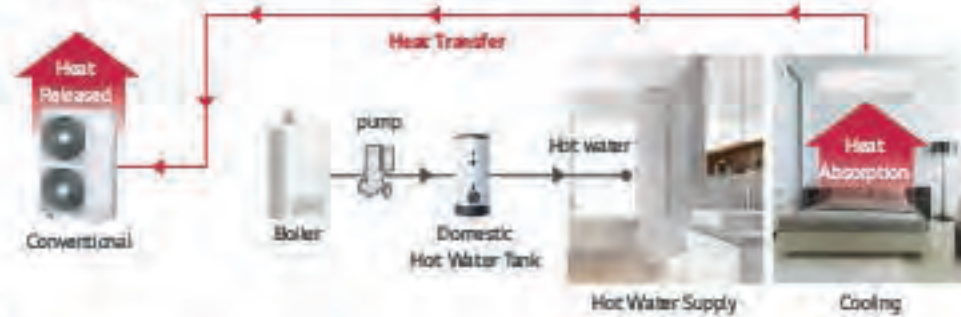


HYDRO KIT

Absorbed heat from indoor space is used for making hot water



High Temperature HYDRO KIT Cycle Diagram

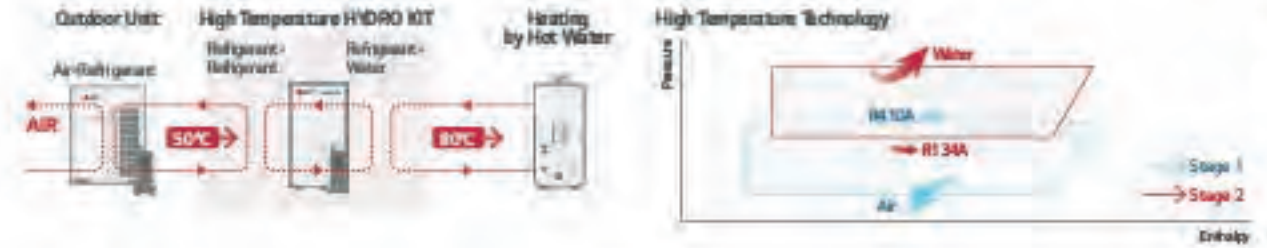


Various Applications

Applicable to a variety of facilities including hospitals, residences and resorts that need floor heating and domestic hot water supply.



Hotel Application

Constant simultaneous cooling and heating operation during summer to provide hot water by using wasted heat energy from indoor cooling process.

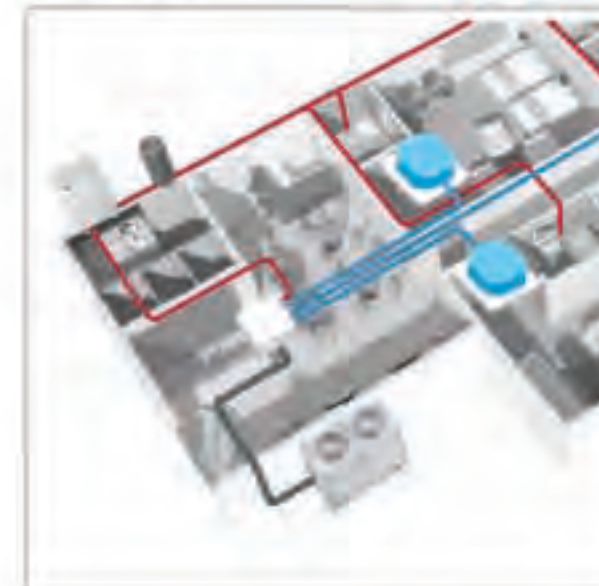

Office Application

Hot water can be supplied at all times in the office by cooling the HR unit to warm up the sanitary tank, using waste energy.





MODEL	UNIT	ARNH18GK1A4	ARNH24GK1A4	ARNH30GK1A4		
Power Supply	V, Ø, Hz	220-230-240, 1, 50/60	220-230-240, 1, 50/60	220-230-240, 1, 50/60		
	kW	5.6	7.1	9.0		
Capacity (Rated)	Cooling	ica/h	4,800	6,100	7,700	
	Heating	Btu/h	19,100	24,200	30,700	
	kW	5.6	7.1	9.0		
	ica/h	4,800	6,100	7,700		
	Btu/h	19,100	24,200	30,700		
Input (Rated)	Cooling	W	75	75	75	
	Heating	W	75	75	75	
Running Current (220-230-240V)	Cooling / Heating	A	0.70 - 0.67 - 0.64	0.70 - 0.67 - 0.64	0.70 - 0.67 - 0.64	
Casing	Material	-	Painted Steel Plate	Painted Steel Plate	Painted Steel Plate	
	RAL (Classic)	-	RAL 9003	RAL 9003	RAL 9003	
Dimensions	Net(W x H x D)	mm	490 x 850 x 315	490 x 850 x 315	490 x 850 x 315	
	Shipping(W x H x D)	mm	1,082 x 563 x 375	1,082 x 563 x 375	1,082 x 563 x 375	
Weight	Net	kg	42.0	42.0	42.0	
	Shipping	kg	47.0	42.0	42.0	
Heat Exchanger	Type	-	Brazed Plate HEX	Brazed Plate HEX	Brazed Plate HEX	
	Quantity	EA	1	1	1	
	Number of Plate	EA	54	54	54	
	Water Volume	l	0.7	0.7	0.7	
	Rated Water Flow	l/min	15.8	20.1	25.9	
Head Loss	m	-	0.22	0.30	0.40	
Water Pump	Type	-	Canned type for hot water circulation	Canned type for hot water circulation	Canned type for hot water circulation	
	Model	-	GRUNDFOS UPM3K 20-75 CHBL	GRUNDFOS UPM3K 20-75 CHBL	GRUNDFOS UPM3K 20-75 CHBL	
	Motor Type	-	AC Motor	AC Motor	AC Motor	
Steps of Pump Performance	-	-	Variable capacity 10% to 100%	Variable capacity 10% to 100%	Variable capacity 10% to 100%	
Power Input Min - Max	W	-	3 - 60	3 - 60	3 - 60	
Expansion Vessel	Volume	Max.	l	8.0	8.0	8.0
	Water pressure	Max.	bar	3.0	3.0	3.0
	Water pressure	Pre-charged	bar	1.0	1.0	1.0
Strainer	Mesh size	-	28 mesh	28 mesh	28 mesh	
	Material	-	Stainless Steel	Stainless Steel	Stainless Steel	
Relief valve	Pressure Limit	Upper Limit	bar	3.0	3.0	3.0



MODEL	UNIT	ARNH18GK1A4	ARNH24GK1A4	ARNH30GK1A4		
Backup Heater	Type	-	Sheath	Sheath	Sheath	
	Number of Heating Coil	EA	2	2	2	
	Capacity Combination	kW	3.0 + 3.0	3.0 + 3.0	3.0 + 3.0	
	Operation	-	Automatic	Automatic	Automatic	
	Heating Steps	Step	2	2	2	
	Power Supply	V Ø, Hz	220-240, 1, 50	220-240, 1, 50	220-240, 1, 50	
Flow Sensor	FLA	A	31.0	31.0	31.0	
	Power Cable (HOTRN-F) (Included Earth)	mm ² x cores	4.0 x 3C	4.0 x 3C	4.0 x 3C	
	Type	-	Vortex	Vortex	Vortex	
	Model	-	SIKA WX20	SIKA WX20	SIKA WX20	
Temperature Control	Measuring Range	Min. - Max.	l/min	5 - 80	5 - 80	5 - 80
	Flow (Trigger Point)	Min.	l/min	7.0	7.0	7.0
Water Tank	Type(Sensor Holder)	-	Microprocessor Thermostat for cooling and heating	Microprocessor Thermostat for cooling and heating	Microprocessor Thermostat for cooling and heating	
Temperature Sensor	Length	m	Male PT 1/2 inch	Male PT 1/2 inch	Male PT 1/2 inch	
Sound Absorbing Thermal Insulation Material	-	-	Foamed polystyrene	Foamed polystyrene	Foamed polystyrene	
Safety Device	-	-	Fuse	Fuse	Fuse	
Piping Connections	Water Side	Inlet	-	Male PT 1 inch	Male PT 1 inch	Male PT 1 inch
	Water Side	Outlet	-	Male PT 1 inch	Male PT 1 inch	Male PT 1 inch
Refrigerant Side	Liquid	mm(inch)	Ø 9.52(3/8)	Ø 9.52(3/8)	Ø 9.52(3/8)	
	Gas	mm(inch)	Ø 15.88(5/8)	Ø 15.88(5/8)	Ø 15.88(5/8)	
Power Cable Supply Cable (HOTRN-F)	mm ² x cores	-	2.5 x 3C	2.5 x 3C	2.5 x 3C	
Communication Cable (VCTF-SB)	mm ² x cores	-	1.0-1.5 x 2C	1.0-1.5 x 2C	1.0-1.5 x 2C	
Refrigerant	Type	-	R32	R32	R32	
	Precharged Amount	kg (lbs)	-	-	-	
	Additional Charging Amount	kg (each)	-	0.43	0.43	0.43
Sound Pressure Level	Control	-	EEV	EEV	EEV	
	Cooling / Heating	Rated	dB(A)	35	35	35
Sound Power Level	Cooling / Heating	Rated	dB(A)	44	44	44

ARNH04GK2A4 / ARNH10GK2A4



MODEL	UNIT	ARNH04GK2A4	ARNH10GK2A4
Cooling Capacity	kW	12.3	28.0
Heating Capacity	kW	13.8	31.5
Power Input (Nominal*)	W	10	10
Exterior Color		Morning Gray	Morning Gray
RAL Code		RAL 7030	RAL 7030
Dimensions (W x H x D)	Body	520 x 631 x 330	520 x 631 x 330
	Shipping	677 x 687 x 418	677 x 687 x 418
	Liquid Side	Ø9.52 (3/8)	Ø9.52 (3/8)
Pipe Connections	Gas Side	Ø15.88 (5/8)	Ø22.2 (7/8)
	Drain Pipe (Internal Dia.)	A (inch)	25A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25A (Male PT 1)
	Outlet	A (inch)	25A (Male PT 1)
Weight	kg	29.2	33.7
Sound Pressure Levels (H / M / L)	dB(A)	26	26
Power Supply	B, V, Hz	1, 220-240, 50	1, 220-240, 50
Communication Cable	mm ² x No.	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C

*) Nominal Performance tested under EN14813

Notes:

- Capacities are based on the following conditions:
 - Cooling: Indoor 27°C (80°F) DB / 19°C (66°F) WB, Outdoor 35°C (95°F) DB / 24°C (75°F) WB, Water inlet 7°C (45°F) / Outlet 18°C (64°F)
 - Heating: Indoor 20°C (68°F) DB / 12°C (54°F) WB, Outdoor 7°C (45°F) DB / 9°C (48°F) WB, Water inlet 37°C (99°F) / Outlet 33°C (91°F)
- Piping Length: Interconnected Pipe Length = 7.5m
- Difference Limit of Elevator (Outdoor - Indoor Unit) is 2m
- MULTI V 5-4HP (ARNH04GK2A4, ARNH10GK2A4) cannot be connected to Hydro Kit.
- MULTI V Water 5 cannot be connected to Hydro Kit.
- Anti-freezing liquid should be added under 10°C (subzero temp) during cooling mode.

Accessories

CHASSIS	ARNH04GK2A4	ARNH10GK2A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		-
Independent Power Module		○
Robot Cleaner		-
Pre Filter (Washable)		-
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
R Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYC8000 (1 point contact), PDRYC8320 (Universal input)
External Input (1 point)		○
Wi-Fi		PWFMD200

○ : Applied, - : Not applied
 Option: Refer to model name table.

ARNH04GK3A4 / ARNH08GK3A4



MODEL	UNIT	ARNH04GK3A4	ARNH08GK3A4	
Heating Capacity	kW	13.8	25.2	
Power Input (Nominal*)	W	2,300	5,000	
Exterior Color		Morning Gray	Morning Gray	
RAL Code		RAL 7030	RAL 7030	
Dimensions (W x H x D)	Body	520 x 1,080 x 330	520 x 1,080 x 330	
	Shipping	682 x 1,168 x 423	682 x 1,168 x 423	
	Liquid Side	mm (inch)	Ø9.52 (3/8)	Ø9.52 (3/8)
Pipe Connections	Gas Side	mm (inch)	Ø15.88 (5/8)	Ø19.05 (3/4)
	Drain Pipe (Internal Dia.)	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
	Outlet	A (inch)	25A (Male PT 1)	25A (Male PT 1)
Weight	kg	87.0	91.0	
Sound Pressure Levels (H / M / L)	dB(A)	43	46	
Power Supply	B, V, Hz	1, 220-240, 50	1, 220-240, 50	
Communication Cable	mm ² x No.	1.0 - 1.5 x 2C	1.0 - 1.5 x 2C	

*) Nominal Performance tested under EN14813

Notes:

- Capacities are based on the following conditions:
 - Heating: Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (45°F) DB / 9°C (48°F) WB, Water inlet 37°C (99°F) / Outlet 33°C (91°F)
- Piping Length: Interconnected Pipe Length = 7.5m
- Difference Limit of Elevator (Outdoor - Indoor Unit) is 2m
- MULTI V5-4HP (ARNH04GK3A4, ARNH08GK3A4) cannot be connected to Hydro Kit.
- MULTI V Water 5 cannot be connected to Hydro Kit.

Accessories

CHASSIS	ARNH04GK3A4	ARNH08GK3A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		-
Independent Power Module		○
Robot Cleaner		-
Pre Filter (Washable)		-
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
R Receiver		-
Zone Controller		-
Dry Contact (with additional accessory)		PDRYC8000 (1 point contact), PDRYC8320 (Universal input)
External Input (1 point)		○
Wi-Fi		PWFMD200

○ : Applied, - : Not applied
 Option: Refer to model name table.

202-213

VENTILATION SOLUTIONS


ERV / ERV WITH DX COIL






High Efficiency Heat Exchanger

Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from the indoor air and transfers it to the fresh incoming air without mixing the air stream.

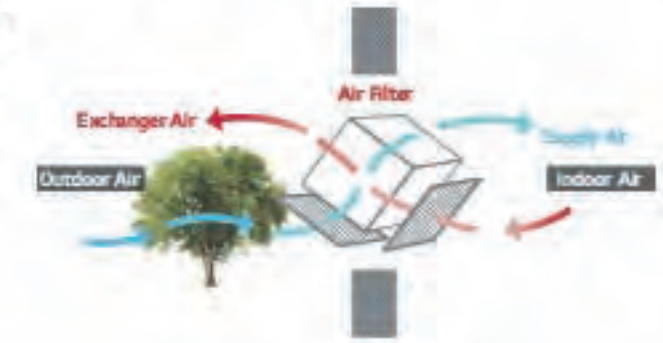


Exhaust System

The exhaust system uses a high static static fan to effectively remove contaminants from indoor air. Supply and exhaust air flows are completely separated in the heat exchanger, allowing the LG ERV to filter out impurities before supplying outdoor air to ensure indoor air is fresh and healthy.

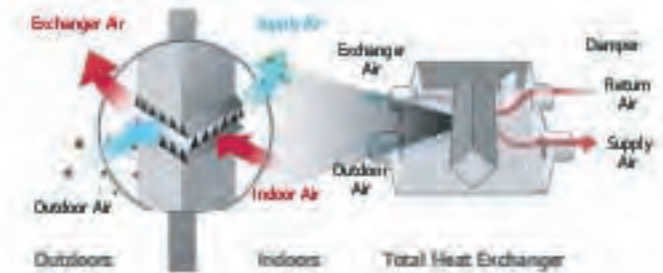

Night Time Free Cooling

During summer nights, indoor heat can be discharged outdoors and cool outdoor air can be brought indoors for energy savings.

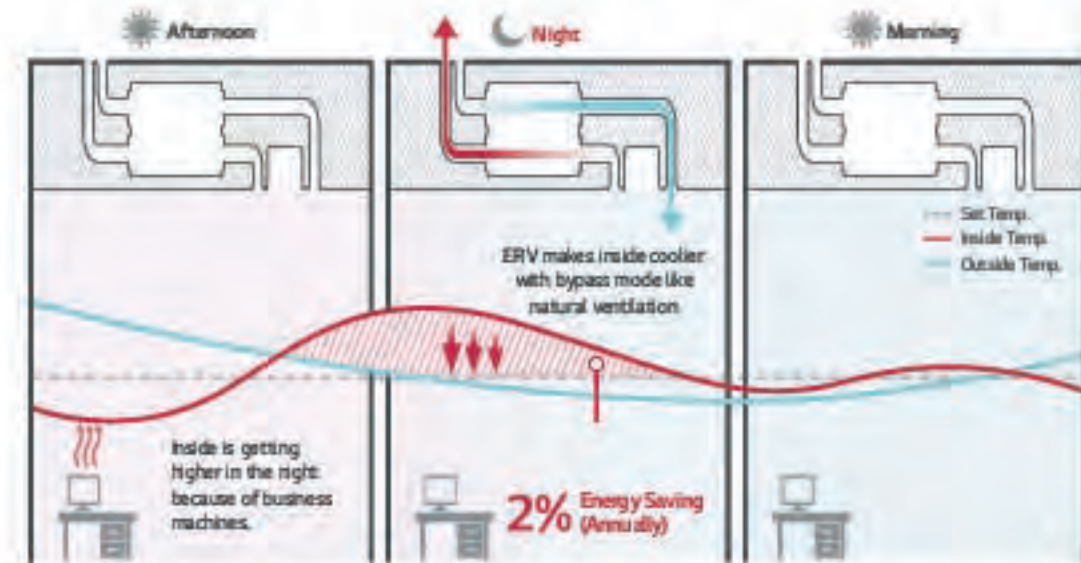


© The function is operated with Night Time Free Cooling on remote controller (with MLTIV only)
 * Energy saving ratio can be differed by weather condition
 * Test Condition
 - Office (40000ft²) / Occupancy: 30 / Area: London, UK
 - ERV (1000 CMH) + MLTIV 4 (T24P) Unit Combination
 - Other conditions are subject to BREEMAN.

Necessity of ERV



CO₂ Auto Operation


LG ERV reduces energy loss with auto fan speed control following CO₂ level.

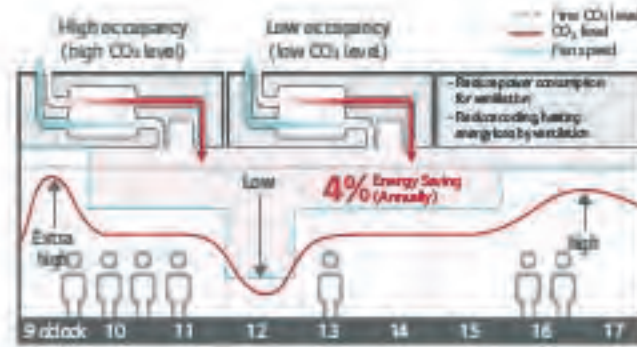

- This function is operated with 'Night Time Fan Control' on remote controller (with MULTI V only)
- Energy saving ratio can be differed by weather condition
- Test Condition - Office (400000) / Occupancy: 30 / Area: London, UK
- BW (1000 CMH) + MULTI V A (12HP) Unit Combination
- Other conditions are subject to BREEM

Seasonal Auto Operation

LG ERV senses outdoor temperature and operates automatically following weather conditions.

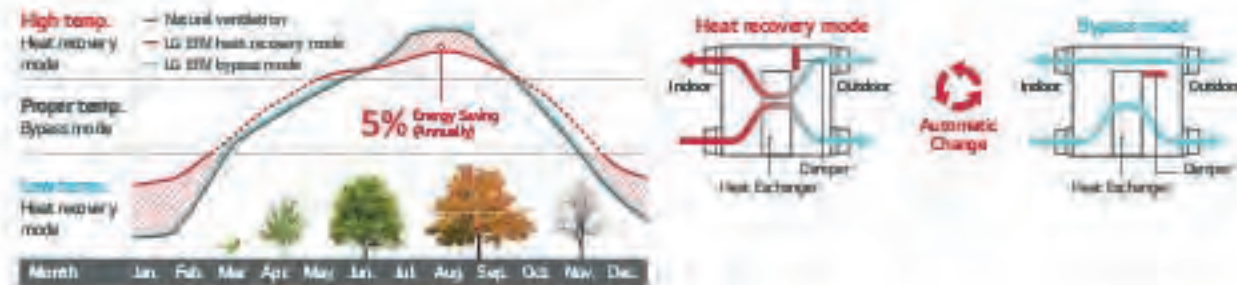

- This function is operated with 'Auto mode' by wired remote control
- Energy saving ratio can be differed by weather condition
- Test Condition - Office (400000) / Occupancy: 30 / Area: London, UK
- BW (1000 CMH) + MULTI V A (12HP) Unit Combination
- Other conditions are subject to BREEM

Delay Operation

When the air conditioner and ERV are switched on simultaneously, delay operation can reduce unnecessary heating and cooling energy loss by slowing down automatic ERV operation.



- This function is operated with 'Night Time Fan Control' on remote controller (with MULTI V only)
- Energy saving ratio can be differed by weather condition
- Test Condition - Office (400000) / Occupancy: 30 / Area: London, UK
- BW (1000 CMH) + MULTI V A (12HP) Unit Combination
- Other conditions are subject to BREEM

CO₂ Level Monitoring

CO₂ sensor senses CO₂ level in the room. Users can monitor CO₂ level on new wired remote controller, and ERV controls the fan speed automatically following the level.

CO₂ Level Visualization

CO₂ sensor senses indoor CO₂ level and displays it on new wired remote controller.



Main display

If the CO₂ level is above 900ppm in the room, the red mark is on.



Further information


CO₂ level and room conditions are displayed continuously.



- The remote controller screen image may change.
- Applicable to only Standard & Premium remote controller.


CO₂ Concentration Control

Using CO₂ sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO₂ concentration.

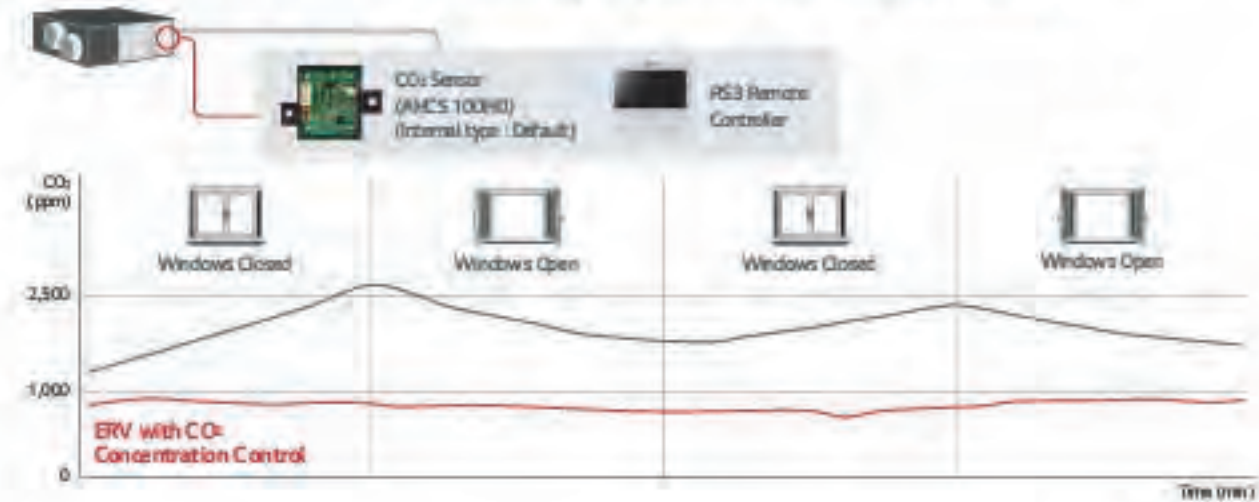

High Durability

LG ERV durability is increased through bacteria-resistant material of heat exchanger and corrosion protection coating. It prevents shortening of product life due to corrosion or mold, and supplies high quality air inside by minimizing bacteria.

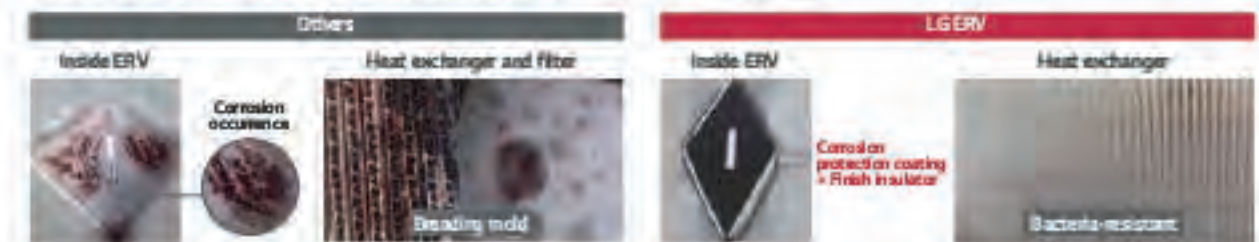

Easy Control

Wired remote controller is easy for usage.



Easy

- Navigation buttons, easy to use
- Easy installation setting

Visible

- Indoor CO₂ level
- Alarm for filter change / remaining time to change filters

Convenient

- Flexible display
- Dual display with air conditioner
- Zoom selected directory to increase legibility

Group Control

1 wired remote controller up to 16 ERV (including air conditioner). It is convenient for large common space such as lobby.


Several units combination

16 units group control is available with 1 remote controller.



Interlocking with Air Conditioning System

- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with 1 remote controller.

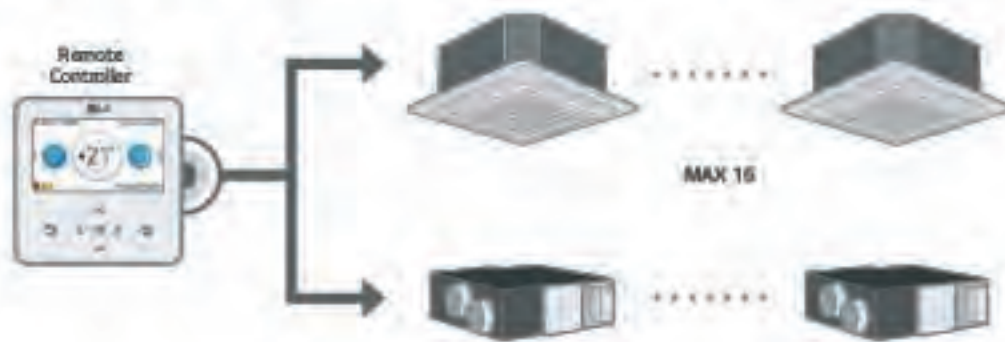

Fast Ventilation Mode


Fast ventilation mode prevents the spread of contaminants under negative indoor pressure, and makes indoor air fresh and comfortable quickly.

Only Exhausting




Exhausting and Supplying Simultaneously

Fast Ventilation Mode

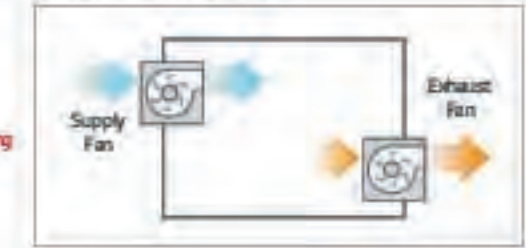

External Static Pressure Control

The high static pressure fan can control the air volume depending on the length of the duct. It is also easy to control the pressure level by using the remote controller for a more flexible duct installation and easier testing.

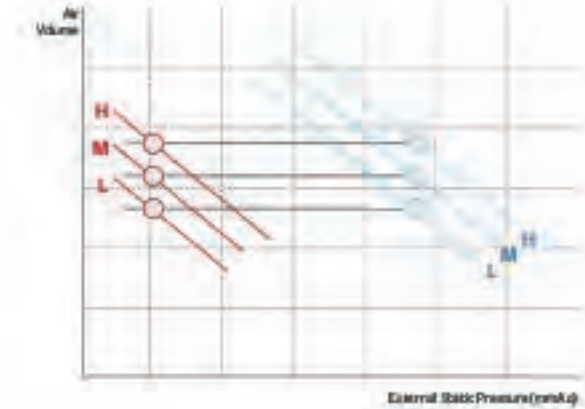

Easy Cleaning and Filter Change

Filter can be conveniently changed and cleaned.



LZ-H025GBA4 / LZ-H035GBA5
LZ-H050GBA5



MODEL		UNIT	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5	
Dimensions (W x H x D)	Body	mm	988 x 273 x 1,014			
Weight	Body	kg	44			
Power Supply		Ø, V, Hz	1, 220-240, 50			
Normal Air Flow		m³/h	250	350	500	
ERV Mode	Operating Step		Super-High / High / Low			
	Current	SH / H / L	A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
	Power Input	SH / H / L	W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
	Air Flow	SH / H / L	m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
	External Static Pressure	SH / H / L	Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
	Temperature Exchange Efficiency	SH / H / L	%	80 / 80 / 83	80 / 80 / 82	79 / 79 / 82
	Enthalpy Exchange Efficiency	Heating (SH / H / L)	%	70 / 70 / 72	75 / 75 / 80	75 / 75 / 78
		Cooling (SH / H / L)	%	88 / 88 / 68	71 / 71 / 75	68 / 68 / 75
	Energy Label	A+ to G Scale		A	B	B
	Sound Pressure Level	SH / H / L	dB(A)	29 / 28 / 24	35 / 32 / 26	37 / 36 / 28
	Sound Power Level	SH / H / L	dB(A)	50	53 / 50 / 42	57 / 56 / 46
	Bypass Mode	Operating Step		Super-High / High / Low		
Current		SH / H / L	A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
Power Input		SH / H / L	W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
Air Flow		SH / H / L	m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
External Static Pressure		SH / H / L	Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
Sound Pressure Level		SH / H / L	dB(A)	29 / 29 / 25	35 / 33 / 26	37 / 37 / 28
Duct Work	Qty	EA	4			
	Size (Ø)	mm	Ø200			
Supply Air Fan	Qty	EA	1			
	Type		Direct Drive Sirocco			
Exhaust Air Fan	Qty	EA	1			
	Type		Direct Drive Sirocco			
Filters	Qty	EA	2			
	Type		Cleanable fibrous fleece			
	Size (W x H x D)	mm	855 x 10 x 168			

- Note:
- ERV mode: Total Heat Recovery Ventilation mode
 - Refer to dimensional drawings
 - Noise level:
 - The operating conditions are assumed to be standard
 - Sound measured at 1.5m below the center of the body
 - Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of perimeter room in which the equipment is installed
 - The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound
 - Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature: 26.5°C DB, 64.5% RH, Outdoor Temperature: 34.5°C DB, 75% RH
 - Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature: 20.5°C DB, 50.5% RH, Outdoor Temperature: 3°C DB, 65% RH
 - Temperature Exchange efficiency is tested at heating condition

Accessories

CHASSIS	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5
Drain Pump	-	-	-
Cassette Cover	-	-	-
Refrigerant Leakage Detector	-	-	-
EEV Kit	-	-	-
Independent Power Module	-	-	-
Robot Cleaner	-	-	-
Pre Filter (Washable)	-	-	-
Ion Generator	-	-	-
CO ₂ Sensor	-	○	-
Ventilation Kit	-	-	-
IR Receiver	-	-	-
Zone Controller	-	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)		
External Input (1 point)	-	-	-
Wi-Fi	-	-	-

○: Applied, -: Not applied
Option: Refer to model name table

LZ-H080GBA5 / LZ-H100GBA5
LZ-H150GBA5 / LZ-H200GBA5



MODEL		UNIT	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5	
Dimensions (W x H x D)	Body	mm	1,101 x 405 x 1,230		1,353 x 815 x 1,230		
Weight	Body	kg	63		130		
Power Supply		Ø, V, Hz	1, 220-240, 50				
Normal Air Flow		m³/h	800	1,000	1,500	2,000	
ERV Mode	Operating Step		Super-High / High / Low		Super-High / High / Low		
	Current	SH / H / L	A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80
	Power Input	SH / H / L	W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420
	Air Flow	SH / H / L	m³/h	800 / 800 / 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600
	External Static Pressure	SH / H / L	Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50
	Temperature Exchange Efficiency	SH / H / L	%	82 / 82 / 85	80 / 80 / 81	82 / 82 / 83	80 / 80 / 81
	Enthalpy Exchange Efficiency	Heating (SH / H / L)	%	73 / 73 / 76	71 / 71 / 73	73 / 73 / 76	71 / 71 / 73
		Cooling (SH / H / L)	%	88 / 88 / 70	64 / 64 / 67	88 / 88 / 70	64 / 64 / 67
	Sound Pressure Level	SH / H / L	dB(A)	40 / 36 / 32	40 / 37 / 33	43 / 39 / 35	43 / 40 / 36
	Sound Power Level	SH / H / L	dB(A)	56 / 53 / 47	59 / 56 / 52	59 / 56 / 50	62 / 59 / 55
	Bypass Mode	Operating Step		Super-High / High / Low		Super-High / High / Low	
		Current	SH / H / L	A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00
Power Input		SH / H / L	W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420
Air Flow		SH / H / L	m³/h	800 / 800 / 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600
External Static Pressure		SH / H / L	Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50
Sound Pressure Level		SH / H / L	dB(A)	41 / 37 / 33	41 / 38 / 34	44 / 40 / 36	44 / 41 / 37
Duct Work	Qty	EA	4		4 + 2		
	Size (Ø)	mm	Ø250		Ø250 + Ø350		
Supply Air Fan	Qty	EA	1		2		
	Type		Direct Drive Sirocco		Direct Drive Sirocco		
Exhaust Air Fan	Qty	EA	1		2		
	Type		Direct Drive Sirocco		Direct Drive Sirocco		
Filters	Qty	EA	2		4		
	Type		Cleanable fibrous fleece		Cleanable fibrous fleece		
	Size (W x H x D)	mm	1,148 x 6 x 245		1,148 x 6 x 245		

- Note:
- ERV mode: Total Heat Recovery Ventilation mode
 - Refer to dimensional drawings
 - Noise level:
 - The operating conditions are assumed to be standard
 - Sound measured at 1.5m below the center of the body
 - Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of perimeter room in which the equipment is installed
 - The sound level at the air discharge port is about 8 dB(A) higher than the unit's operating sound
 - Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature: 26.5°C DB, 64.5% RH, Outdoor Temperature: 34.5°C DB, 75% RH
 - Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature: 20.5°C DB, 50.5% RH, Outdoor Temperature: 3°C DB, 65% RH
 - Temperature Exchange efficiency is tested at heating condition

Accessories

CHASSIS	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5
Drain Pump	-	-	-	-
Cassette Cover	-	-	-	-
Refrigerant Leakage Detector	-	-	-	-
EEV Kit	-	-	-	-
Independent Power Module	-	-	-	-
Robot Cleaner	-	-	-	-
Pre Filter (Washable)	-	-	-	-
Ion Generator	-	-	-	-
CO ₂ Sensor	-	-	○	-
Ventilation Kit	-	-	-	-
IR Receiver	-	-	-	-
Zone Controller	-	-	-	-
Dry Contact (with additional accessory)	PDRYCB000 (1 point contact), PDRYCB500 (Modbus)			
External Input (1 point)	-	-	-	-
Wi-Fi	-	-	-	-

○: Applied, -: Not applied
Option: Refer to model name table


Providing Cool & Warm Fresh Air

During the summer, ERV DX can transform outdoor warm air into cool air for indoors, and it can prevent cold draft during the winter by supplying warm air.




Total Air Conditioning Solution

LG ERV DX can be used as a Total Air Conditioning Solution. It can control condition of incoming air with the DX coil and humidifier for making comfortable indoor air. In the summer, LG ERV DX provides air conditioning by cooling and dehumidifying incoming air. During winter, warm air is provided by heating and humidifying incoming air.

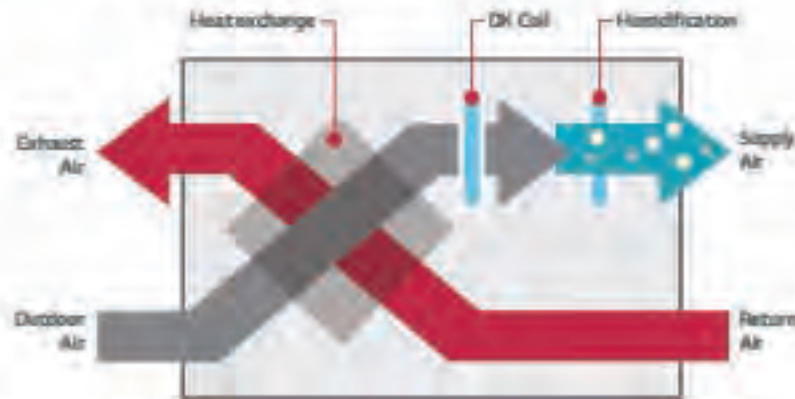

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

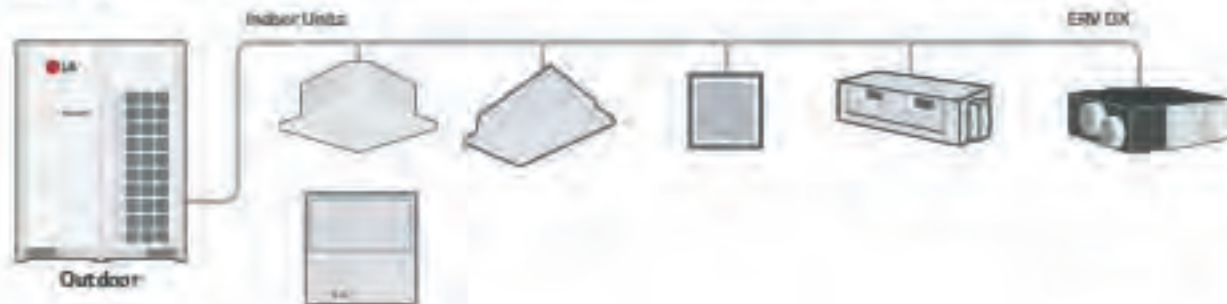

LZ-H050GXH4 / LZ-H080GXH4
LZ-H100GXH4 / LZ-H050GXN4
LZ-H080GXN4 / LZ-H100GXN4



MODEL		LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Fresh Air Conditioning Load	Cooling	4.99	7.46	9.12	4.93	7.46	9.12
	Heating	6.73	9.80	11.72	6.73	9.80	11.72
Temperature Exchange Efficiency	SH / H / L	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78
Enthalpy Exchange Efficiency	Cooling (SH / H / L)	61 / 61 / 63	59 / 59 / 53	45 / 45 / 50	61 / 61 / 63	59 / 59 / 53	45 / 45 / 50
	Heating (SH / H / L)	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66
Operation Range	Outdoor Air Temperature	-15 ~ 45		-15 ~ 45		-15 ~ 45	
	Heat Exchange Mode	CMH		CMH		CMH	
Air Flow Rate	SH / H / L	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
	Bypass Mode (SH / H / L)	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Fan	External Static Pressure (SH / H / L)	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110	170 / 130 / 80	150 / 100 / 70
	System	Manual Evaporating Type					
Humidifier	Amount	2.70	4.00	5.40			
	Pressure Feed Water	0.02 ~ 0.09					
	Heat Exchange Mode	dB(A)					
Sound Pressure	SH / H / L	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
	Bypass Mode (SH / H / L)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Refrigerant		R410A					
Power Supply		1, 220-240 V/50/60					
	Heat Exchange Mode	kW					
Power Input (Nominal)	SH / H / L	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Heat Exchange Mode	A					
Nominal Running Current (RLA)	SH / H / L	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Heat Exchange System		Air to air cross flow total heat (Sensible + latent heat) exchange			Air to air cross flow total heat (Sensible + latent heat) exchange		
Heat Exchanging Element		Specially processed non-flammable paper			Specially processed non-flammable paper		
Air Filter		Multidirectional fibrous fleece			Multidirectional fibrous fleece		
Dimensions	W x H x D	1,667 x 365 x 1140			1,667 x 365 x 1,140		
Net Weight	kg	10.5			9.8		
	Liquid	mm			mm		
	Gas	mm			mm		
Piping Connection	Water	mm			mm		
	Drain Pipe (Internal Dia.)	mm (inch)			mm (inch)		
Connection Duct Diameter		mm			mm		

Note:
1. Cooling Capacity: Test condition - Indoor temperature: 27°C DB / 19°C WB / Outdoor temperature: 35°C DB
2. Heating Capacity: Test condition - Indoor temperature: 19°C DB / Outdoor temperature: 7°C DB / 6°C WB
3. Humidifying capacity is based on the following conditions: Indoor temperature: 20°C DB / 13°C WB / Outdoor temperature: 7°C DB / 6°C WB
4. Cooling and heating capacities are based on the following conditions: Fan is based on High Speed Super high
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an area of 1 m²
6. The specifications, design and information here are subject to change without notice.

Accessories

CHASSIS	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Drain Pump	-					
Cassette Cover	-					
Refrigerant Leakage Detector	-					
EEV Kit	FR-LDW50					
Independent Power Module	-					
Robot Cleaner	-					
Pre Filter (Washable)	-					
Ion Generator	-					
CO ₂ Sensor	AHCS102HQ					
Ventilation Kit	-					
IR Receiver	-					
Zone Controller	-					
Dry Contact (With additional accessory)	PERYCB000 (1 point contact), PERYCB500 (Modbus)					
External Input (1 point)	0					
Wi-Fi	-					

0: Applied, -: Not applied
Option: Refer to model name in table

214-243

CHILLER

INVERTER SCROLL CHILLER / FCU



INVERTER SCROLL CHILLER

Capacity (kW)		65	74	114	130	148	171	195	222
Capacity (kW)	Cooling	65	74	114	130	148	171	195	222
	Heating	70.3	82	120	140.5	164	180	210.9	246
Range of Unit Control	Up to 1,110 kW (5 CHILLERS) by AC Smart Controller								
	Up to 1,110 kW (5 CHILLERS) by HMI Touch controller								
	Up to 2,220 kW (10 CHILLERS) by ACP (Advanced Control Platform)								
*Control controller ACP, AC Smart controller are optional.									

FCU

(kW)* (kBTU/h)		1.8	2.7	3.2	4.1	6	7.2	9	10.5	13
4 Way Cassette		5k	9k	11k	14k	20k	24k	30k	36k	44k
Ceiling Mounted Cassette	Body Size (WxHxD, mm)	570 x 214 x 570		570 x 256 x 570	840 x 204 x 840		840 x 246 x 840			
	Front Panel	PT-UQC, PT-QHW0 (U-Style)				PT-UMC				
(kW)* (kBTU/h) <th>1.5</th> <th>1.8</th> <th>2.5</th> <th>3.2</th> <th>3.9</th> <th>5.5</th> <th>6.6</th> <td colspan="2"></td>		1.5	1.8	2.5	3.2	3.9	5.5	6.6		
Ceiling Mounted Duct	Low ESP Duct	4k	5k	9k	11k	13k	17k	22k		
	Body Size (WxHxD, mm)	700 x 190 x 700		900 x 190 x 700		1,100 x 190 x 700				

* All Images are for 2 pipe type only.
** Based on Cooling Capacity. Cooling Capacity setting condition: Indoor/Outdoor/Water Temperature/TC / 27°C, Indoor Air Temperature 27°C/81°F/26°C

ACCESSORIES & PARTS FOR WATER PIPES CONNECTION

Remote Controller	Dry Contact	ETC	Parts for Water Pipes Connection (Purchase on Site)	(Installer Purchase)
 Premium PREMATA000(A/B)	 PDRYCB000 (Simple)	 Remote Temperature Sensor PQRSTA0	 Rubber Packing (4EA, OD23 x ID15 x 3.2)	 Ball Valve (2EA, FPT, N, 20A)
 Standard III PREM1B100 (White) PREM1B110 (Black)	 PDRYCB400 (2 points)	 Wi-Fi Module PWRM0200	 Flexible Pipe (2EA, FPT, N, 35.0mm/500mm Ordered Specification)	 Nipple (2EA, MPT, N, MFF, N*)
 Standard II PREM1B001 (White) PREM1B001 (Black)	 PDRYCB320 (for Thermostat)	 Independent Power Module PRIP0	 Nipple (2EA, MPT, N, MFF, N*)	 Strainer (1EA, FPT, N, 430)
 Simple PQRVC100(W) PQRCHCA00(W) (for Hotel)		 Group Control Wire PZCWRG3	 2Way Valve (On/Off 2-wires or 3wires)	 Water Pipe (2EA, 20A, Copper or Stainless Tube)
 Wireless Remote Controller PWSB21H/C (Heat Pump/Cooling Only)		 2-Wire Control Wire PZCWRG2	 Valve Insulation Material (1EA)	
		 Extension Wire PZCWRG1		
		 Drain Hose** (1EA, 5m)		

1) It could not be expanded some functions.
2) The dry contact for Modbus is built in the FCU as default.
3) Included with installation parts.



ULTIMATE INVERTER COMPRESSOR

As the core technology of the air conditioning system, the Ultimate Inverter Compressor of MULTI V 5 boasts its ultimate efficiency and durability, designed based on the unique technology and innovation of LG HVAC.

All Inverter

Provide high efficiency with low vibration and low noise

Six By-pass Valves

Prevent compressor damage due to excessively compressed refrigerant more efficiently than 4 by-pass valves

01. Vapor Injection

Wide operating range via two-stage compression

02. Enhanced Bearing with PEEK Material


Newly invented system motivated by PEEK (Polyetheretherketone) bearing used for aero engine to increase operation range and durability

03. Wide Operation Range from 30 to 130 Hz

Improved part load efficiency at all operation ranges

04. HIPOR™ (High Pressure Oil Return)

Resolve compressor efficiency loss caused by oil return

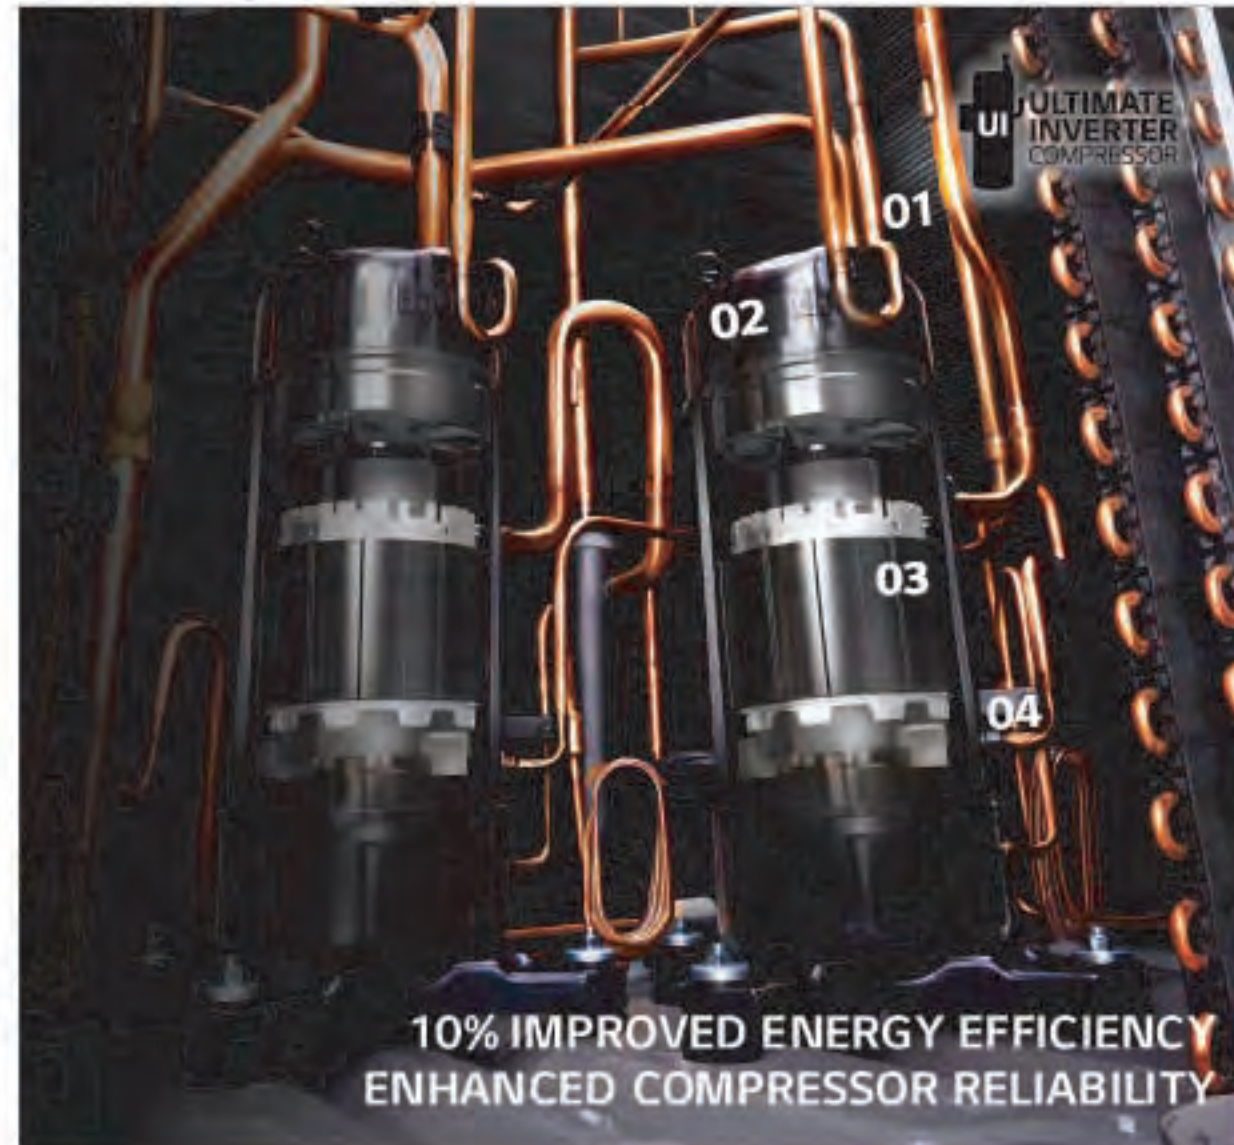

Smart Farm



Small Industry (Process Water)



Hotel / Office



All Inverter Scroll Compressor

All inverter scroll compressor with HIPOR™ (Patent) is applied to improve full load and part load energy efficiency.


All Inverter System

Wide operation frequency range 30 - 130Hz



Compressor Efficiency


Compressor efficiency by Hz is increased through HIPOR™ application.

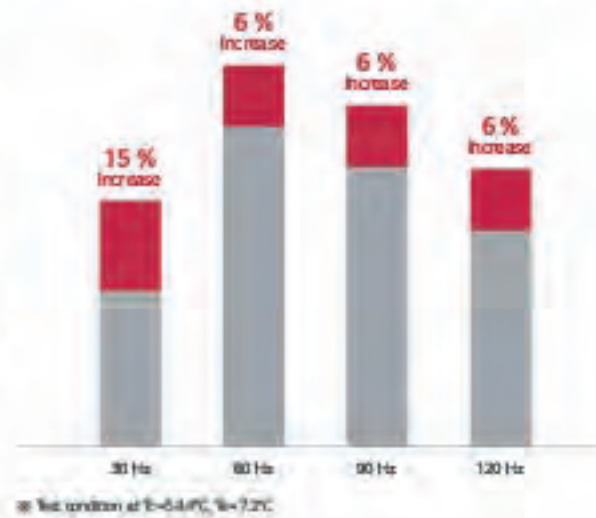

App. Inverter Comp. vs Constant Speed Comp.

Inverter compressor is more stable and efficient solution than Constant speed compressor.

Comparison of starting type

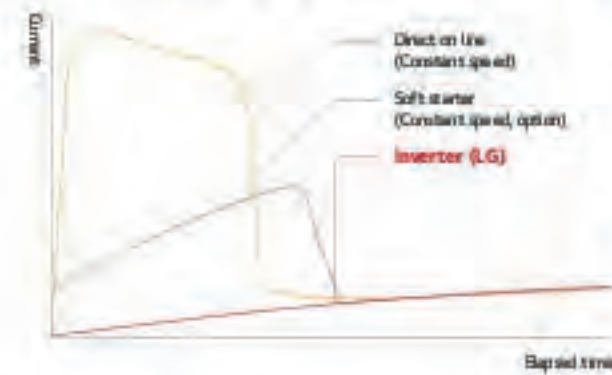

Compressor	Starting type	Starting current (Is / FLA*, %)
Constant speed	Direct on line	About 650%
	Soft starter	200 - 350%
Inverter (LG)	Inverter	No inrush current

* FLA: Full load ampere

Inverter's feature & benefits

When starting

Reduce starting torque below full load torque
→ **Mechanical wear ↓**

Decrease starting current under FLA
→ **Circuit breaker capacity ↓**

When operating

Low electric loss due to high value of the power factor**
→ **Energy efficient**

Low power input in part load
→ **High SEER**


Continuously adjust compressor output according to the load. (Compressor 15-125Hz)
→ **Save energy**

** Power factor (PF) is between active power (kW) and total power (kVA)


Lower Load Operation

20% part load operation and minimized water outlet temperature hunting with inverter scroll compressor.

LG Inverter Scroll Compressor

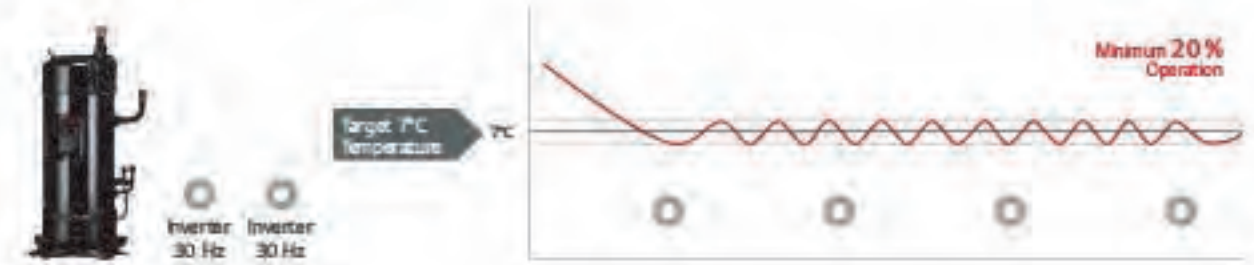

Normal On/Off Multi Compressor System

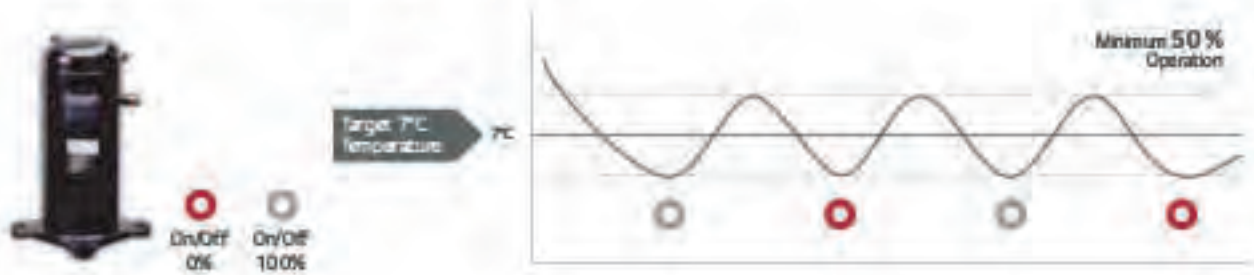


High Energy Efficiency

All inverter scroll compressors with Multi V technologies improve energy efficiency.


Cooling Performance

EER

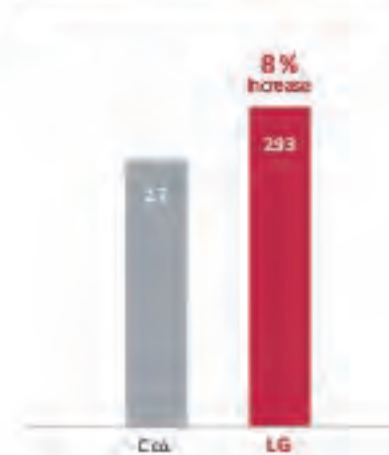


Heating Performance

COP

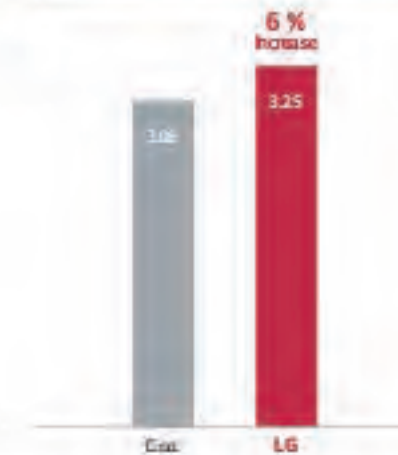

SCOP

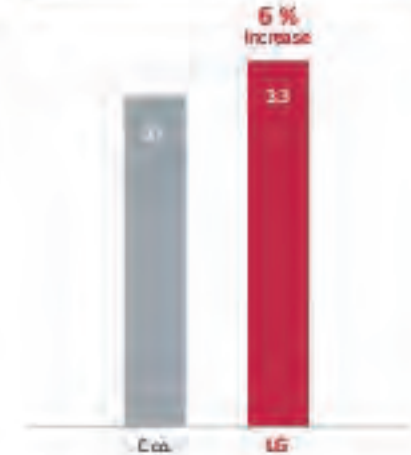


@ 65 kW (Water pump model) compressor

Continuous Heating Operation

Continuous heating minimizes the decrease of water outlet temperature during defrosting for multi circuit model.

Multi cycle can defrost each cycle individually to supply hot water continuously multi cycle.

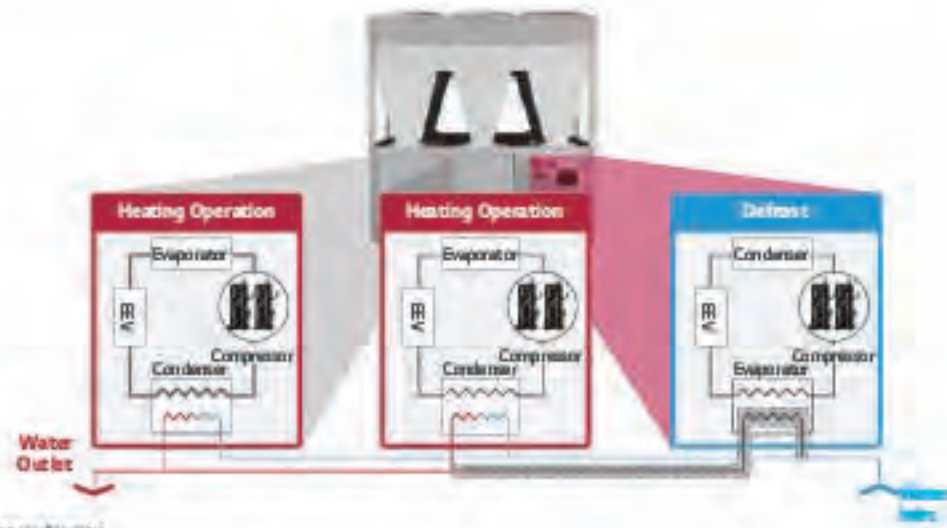

* Applied to coil and compressors per refrigerator

Back Up Operation

If one compressor or one cycle needs to be repaired, backup operation helps the whole system to operate continuously.

All Inverter System



Cycle back up



Corrosion Resistance (Black Fin)

'Black Fin' heat exchanger is highly corrosion resistant, designed to perform in corrosive environments such as contaminated and humid condition.

Black Fin

- Longer lifespan, lower operational costs
- Strengthened corrosion resistant coating


Hydrophilic Coating

The hydrophilic coating minimizes moisture build up on the fin.

Corrosion Resistant Black Coating

The black coating provides strong protection from corrosion.

Aluminum Fin



Black Box Function

Quick service can be done because operation data can be saved for 180 seconds before system failure.

Without Black Box Function

Check many failure causes and error codes in person

With Black Box Function

Search for the failure cause conveniently using recorded data



Compact Size

Compact size reduces concern about installation and service space.



Low Noise Level


Lower noise can reduce noise pollution and provide a quieter environment.

Noise Comparison



Silent Operation Function (Cooling Mode)

Silent operation function can reduce noise levels at night time by adjusting the fan RPM.

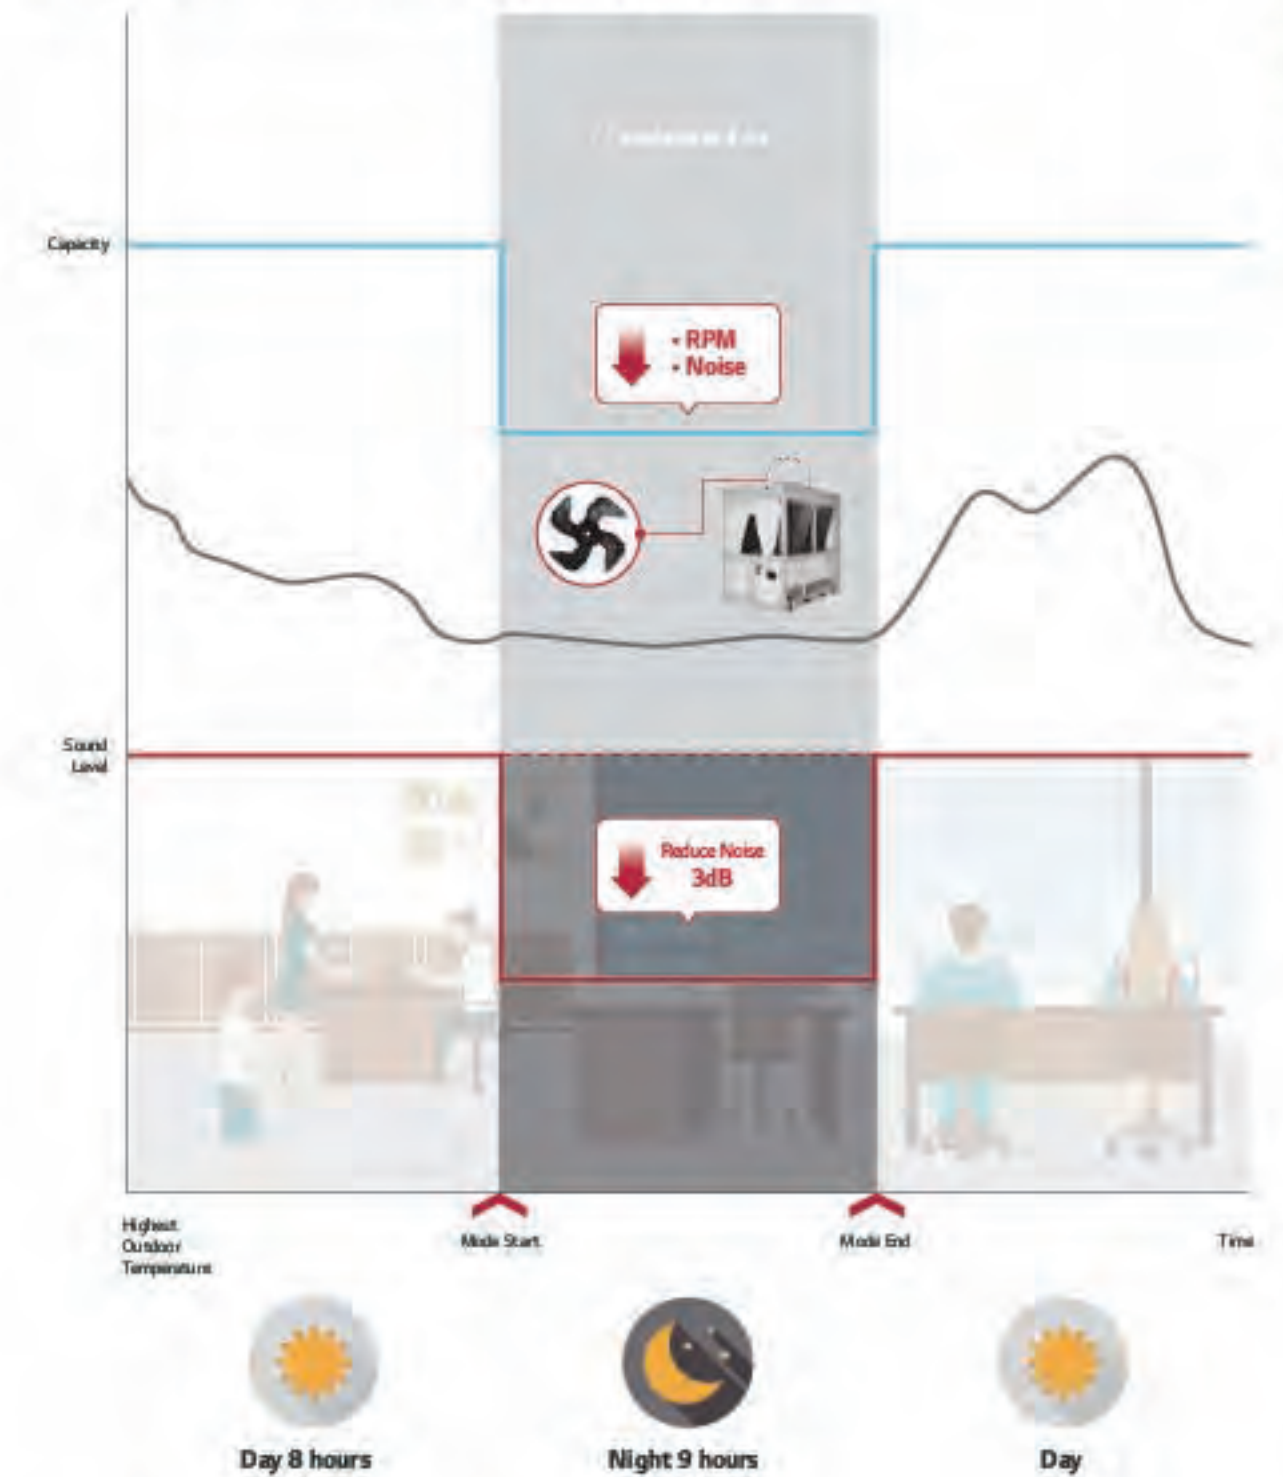

ACHH020LBAB / ACHH023LBAB
ACHH033LBAB / ACHH040LBAB



LG participates in the ECP program for EUROVENT WFF program. Check ongoing validity of certification: www.eurovent-certification.com

Heat pump model

INVERTER SCROLL CHILLER		ACHH020LBAB	ACHH023LBAB	ACHH033LBAB	ACHH040LBAB	
		H/P	H/P	H/P	H/P	
Power	Phase/V	3,4380-415	3,4380-415	3,4380-415	3,4380-415	
Capacity	Cooling	kW	65	74	114	130
		RT	18.5	21	32.4	37
	Heating	kW	70.3	82	120	140.6
		RT	20	23	34	40
Input Power	Cooling	kW	22.2	27.4	36.6	44.4
	Heating	kW	21.6	27.3	35.3	43.3
Max operating Current	A	39	48	72	78	
Efficiency	Cooling	W/W	2.93	2.70	3.10	2.93
	Heating	W/W	3.25	3.00	3.40	3.25
SEER	W/W	4.40	4.20	4.50	4.40	
SCOP	W/W	3.30	3.30	3.30	3.30	
Sound Pressure	dB(A)	67	68	68	68	
Sound power	Cooling	dB(A)	86	87	87	90
	Heating	dB(A)	86	87	88	90
Compressor	Type	-	Scroll	Scroll	Scroll	
	No. of Compressor	EA	2	4	4	
Oil Type	-	PVE	PVE	PVE	PVE	
	Oil charge	cc	1,400 x 2	1,400 x 2	1,400 x 4	1,400 x 4
Sump Heater	W	60 x 2	60 x 2	60 x 4	60 x 4	
	Type	-	R410A	R410A	R410A	
Refrigerant	Amount of Charged	Kg	7.0 kg x 2	7.0 kg x 2	7.0 kg x 4	7.0 kg x 4
	Type	-	plate	plate	plate	plate
Evaporator	Pressure drop	kPa	21.5	28.7	18.7	21.5
	Operating maximum pressure (Refrigerant / Water)	kg/cm ²	42/10	42/10	42/10	42/10
Standard Flow (Cooling/Heating)	LPM	186/200	211/235	327/345	372/400	
	Inlet/Outlet diameter (Water pipe)	mm	50A/50A	50A/50A	65A/65A	65A/65A
Fan motor	Type	-	BLDC	BLDC	BLDC	
	No. of Fan	EA	2	2	4	4
No. of Vanes	EA	4	4	4	4	
	Air Flow Rate	CMM	210 x 2 @1,000 rpm	210 x 2 @1,000 rpm	210 x 4 @1,000 rpm	210 x 4 @1,000 rpm
Motor power	W	900 x 2	900 x 2	900 x 4	900 x 4	
Expansion unit	-	EEV	EEV	EEV	EEV	
Weight	kg	520	520	970	970	
Dimension	W	mm	765	765	1,528	1,528
	H	mm	2,293	2,293	2,293	2,293
D	mm	2,154	2,154	2,154	2,154	
	Footprint	m ² / RT	0.089	0.078	0.102	0.089
Protection Device	High/Low Pressure And Frost	-	-	-	-	
Remote Control	-	Modbus	Modbus	Modbus	Modbus	
Power	Power Line	mm ²	25.0mm ² x 5C	25.0mm ² x 5C	50.0mm ² x 5C	50.0mm ² x 5C
Outlet Temperature	Cooling	°C	5-20	5-20	5-20	5-20
	Heating	°C	30-55	30-55	30-55	30-55
Ambient Temperature	Cooling	°C	-15-48	-15-48	-15-48	-15-48
	Heating	°C	-30-35	-30-35	-30-35	-30-35
Earth Leakage Breaker	A	75	75	125	125	

Notes:
 1. Due to our policy of innovation some specifications may be changed without prior notification.
 2. Capacities and inputs are based on the following conditions:
 Cooling : Outdoor air temp. 35°C, Water inlet temp. 12°C, Water Outlet temp. 7°C
 Heating : Outdoor air temp. 7°C, Water inlet temp. 40°C, Water Outlet temp. 45°C
 3. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard.
 Sound power level is measured ISO 9614:2009 by sound intensity method. Therefore, these values can be increased owing to ambient conditions during operation.

ACHH045LBAB / ACHH050LBAB
ACHH060LBAB / ACHH067LBAB



LG participates in the ECP program for EUROVENT WFF program. Check ongoing validity of certification: www.eurovent-certification.com

Heat pump model


INVERTER SCROLL CHILLER		ACHH045LBAB	ACHH050LBAB	ACHH060LBAB	ACHH067LBAB	
		H/P	H/P	H/P	H/P	
Power	Phase/V	3,4380-415	3,4380-415	3,4380-415	3,4380-415	
Capacity	Cooling	kW	148	171	195	222
		RT	42.1	48.6	55.4	63.1
	Heating	kW	164	180	210.9	246
		RT	47	51	60	70
Input Power	Cooling	kW	54.8	55.2	66.6	82.2
	Heating	kW	54.7	52.9	64.9	82
Max operating Current	A	96	108	117	144	
Efficiency	Cooling	W/W	2.70	3.10	2.93	2.70
	Heating	W/W	3.00	3.40	3.25	3.00
SEER	W/W	4.20	4.50	4.40	4.20	
SCOP	W/W	3.30	3.30	3.30	3.30	
Sound Pressure	dB(A)	68	68	68	68	
Sound power	Cooling	dB(A)	91	88	91	92
	Heating	dB(A)	91	88	91	92
Compressor	Type	-	Scroll	Scroll	Scroll	
	No. of Compressor	EA	4	6	6	6
Oil Type	-	PVE	PVE	PVE	PVE	
	Oil charge	cc	1,400 x 4	1,400 x 6	1,400 x 6	1,400 x 6
Sump Heater	W	60 x 4	60 x 6	60 x 6	60 x 6	
	Type	-	R410A	R410A	R410A	
Refrigerant	Amount of Charged	Kg	7.0 kg x 4	7.0 kg x 6	7.0 kg x 6	7.0 kg x 6
	Type	-	plate	plate	plate	plate
Evaporator	Pressure drop	kPa	28.7	18.7	21.5	28.7
	Operating maximum pressure (Refrigerant / Water)	kg/cm ²	42/10	42/10	42/10	42/10
Standard Flow (Cooling/Heating)	LPM	411/470	490/518	558/600	633/705	
	Inlet/Outlet diameter (Water pipe)	mm	65A/65A	65A/65A	65A/65A	65A/65A
Fan motor	Type	-	BLDC	BLDC	BLDC	
	No. of Fan	EA	4	6	6	6
No. of Vanes	EA	4	4	4	4	
	Air Flow Rate	CMM	210 x 4 @1,000 rpm	210 x 6 @1,000 rpm	210 x 6 @1,000 rpm	210 x 6 @1,000 rpm
Motor power	W	900 x 4	900 x 6	900 x 6	900 x 6	
Expansion unit	-	EEV	EEV	EEV	EEV	
Weight	kg	970	1,430	1,430	1,430	
Dimension	W	mm	1,528	2,291	2,291	2,291
	H	mm	2,293	2,293	2,293	2,293
D	mm	2,154	2,154	2,154	2,154	
	Footprint	m ² / RT	0.078	0.101	0.089	0.078
Protection Device	High/Low Pressure And Frost	-	-	-	-	
Remote Control	-	Modbus	Modbus	Modbus	Modbus	
Power	Power Line	mm ²	50.0mm ² x 5C	95.0mm ² x 5C	95.0mm ² x 5C	
Outlet Temperature	Cooling	°C	5-20	5-20	5-20	5-20
	Heating	°C	30-55	30-55	30-55	30-55
Ambient Temperature	Cooling	°C	-15-48	-15-48	-15-48	-15-48
	Heating	°C	-30-35	-30-35	-30-35	-30-35
Earth Leakage Breaker	A	125	200	200	200	

Notes:
 1. Due to our policy of innovation some specifications may be changed without prior notification.
 2. Capacities and inputs are based on the following conditions:
 Cooling : Outdoor air temp. 35°C, Water inlet temp. 12°C, Water Outlet temp. 7°C
 Heating : Outdoor air temp. 7°C, Water inlet temp. 40°C, Water Outlet temp. 45°C
 3. Sound pressure level is measured on the rated condition in the anechoic room by ISO 3745 standard.
 Sound power level is measured ISO 9614:2009 by sound intensity method. Therefore, these values can be increased owing to ambient conditions during operation.



Fan Coil Unit

FCU can be applied to various solutions using water. It allows not only to control equipment individually by using the remote controller, but also apply integrated control including control of some external equipment and devices through the central controller.

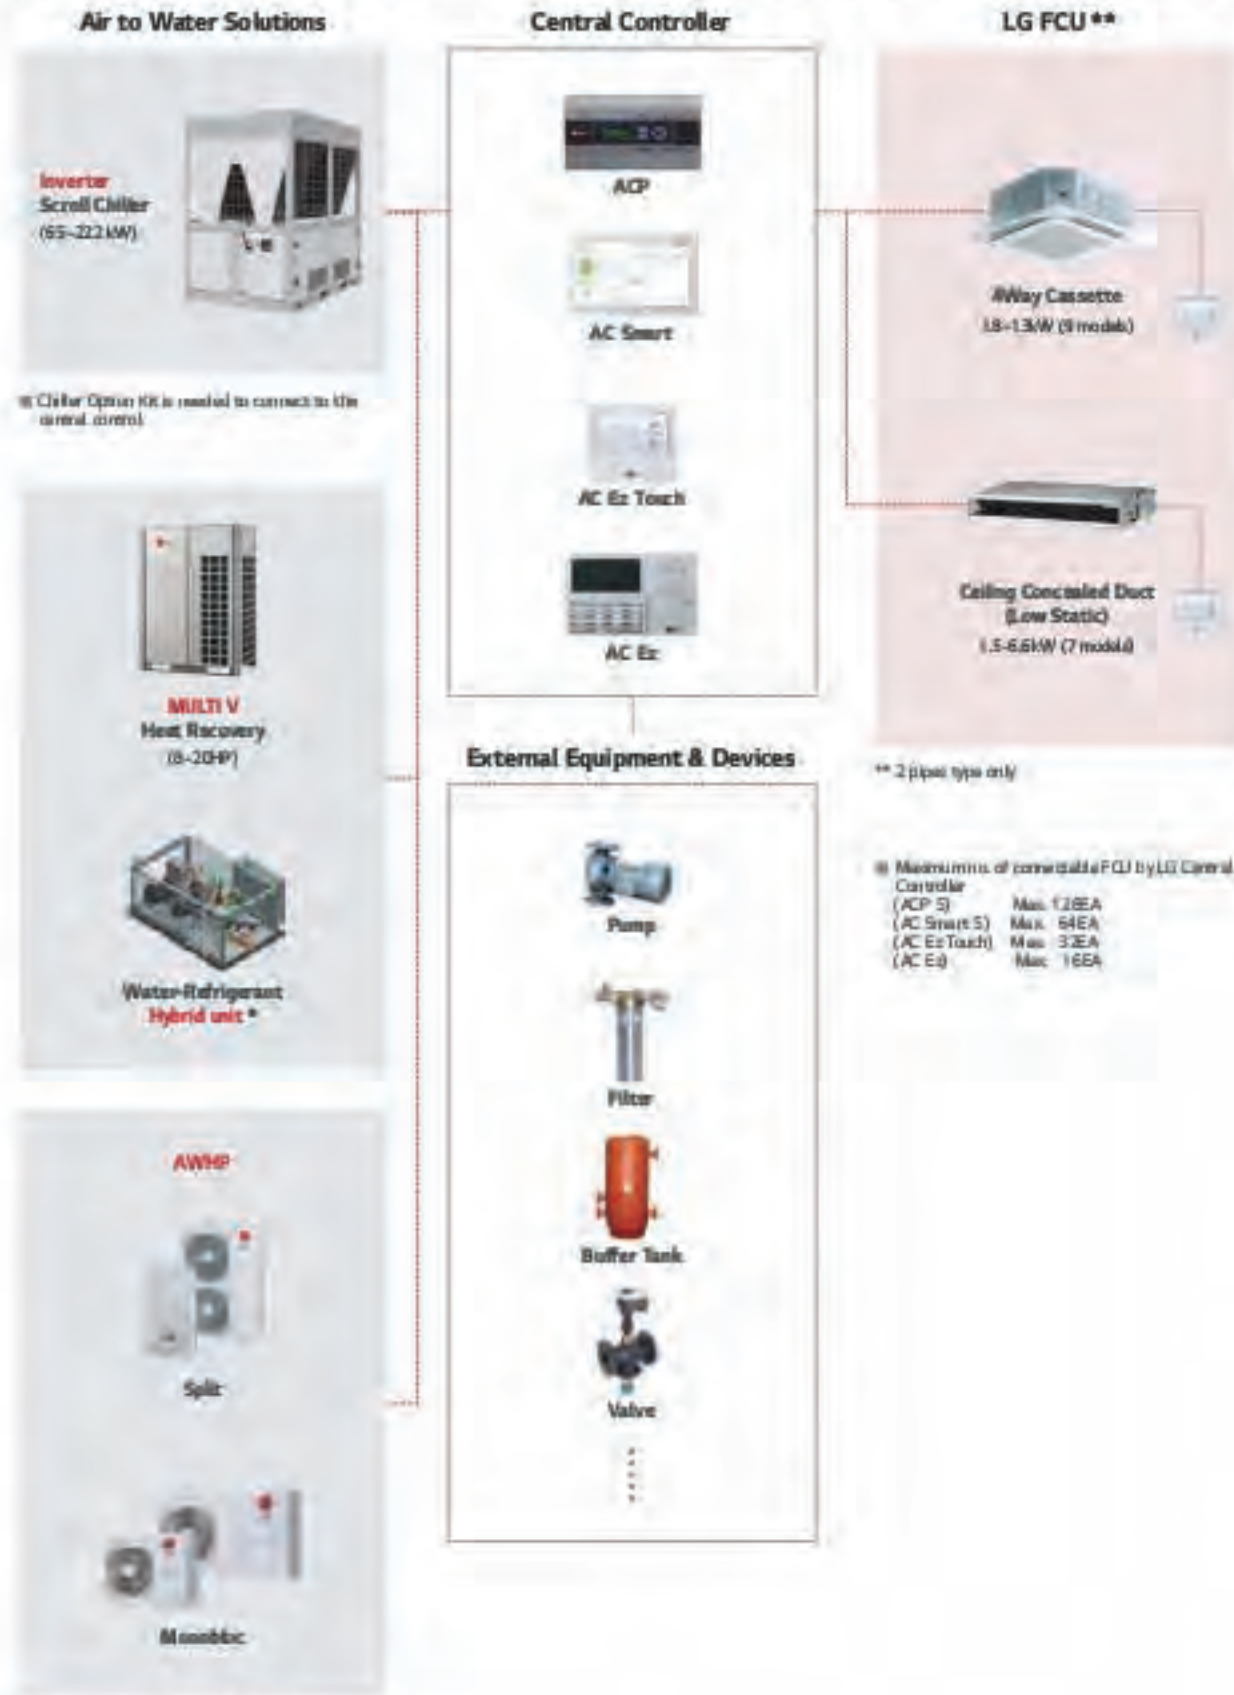

Interlocking Control

It allows interlocking control between FCU and Inverter Scroll Chiller(ISC) by using LG central controller such as ACP, ACS. When FCU is being turned on/off, ISC turns on/off automatically by LG central controller.

What are the benefits?

The Total Cost(Equipment + installation + BMS) is greatly reduced. It eliminated the hassle of turning on the ISC first.




Central Controller

LG's central controller allows control of various external equipment and devices in addition to LG's equipment. (FCU, Chiller, EHP, etc.)

What are the benefits?

Integrated control of the system can be realized conveniently through the LG central controller. (FCU + Chiller + EHP + + External Equipment & Devices)

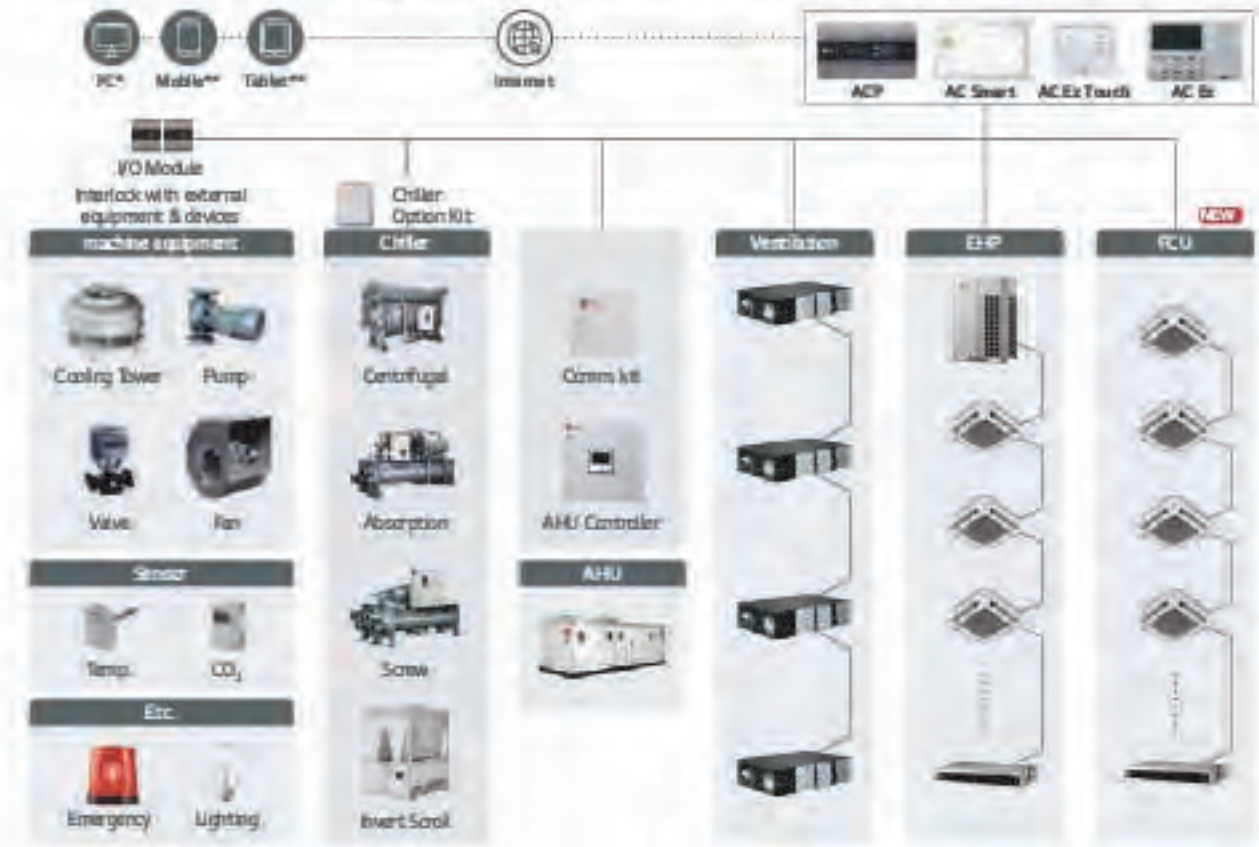

* Unable to INU ACEs ** Unable to INU ACEs, ACE Ez Touch

Scheduled Operation

You can set 2 schedules for one day and up to 14 schedules for a week.



※ This function is for wired remote controller only.
 ※ Wired remote controller is need to be separately purchased.

Group Control with One Remote Controller

Up to 16 FCU's can be controlled with one wired remote controller. It can reduce installation costs and keep the wall interior clean.



※ If you set up the 'Installation Setting' → Group Control 'Enabled' on your Wired Remote Controller, you can use many more functions.

Easy Control (Simple Test Run via LGMV)


LG MV (Monitoring View) helps engineers to inspect and monitor LG's air conditioning unit easily.



※ Search "Mobile LGMV" on Google market or App store then download the app.
 ※ Wi-Fi router (P1WFM02200) is required by option.

Individual Control & External Central Control

It allows not only to control each room by using the remote controller, but also apply integrated control through a 3rd party central controller.

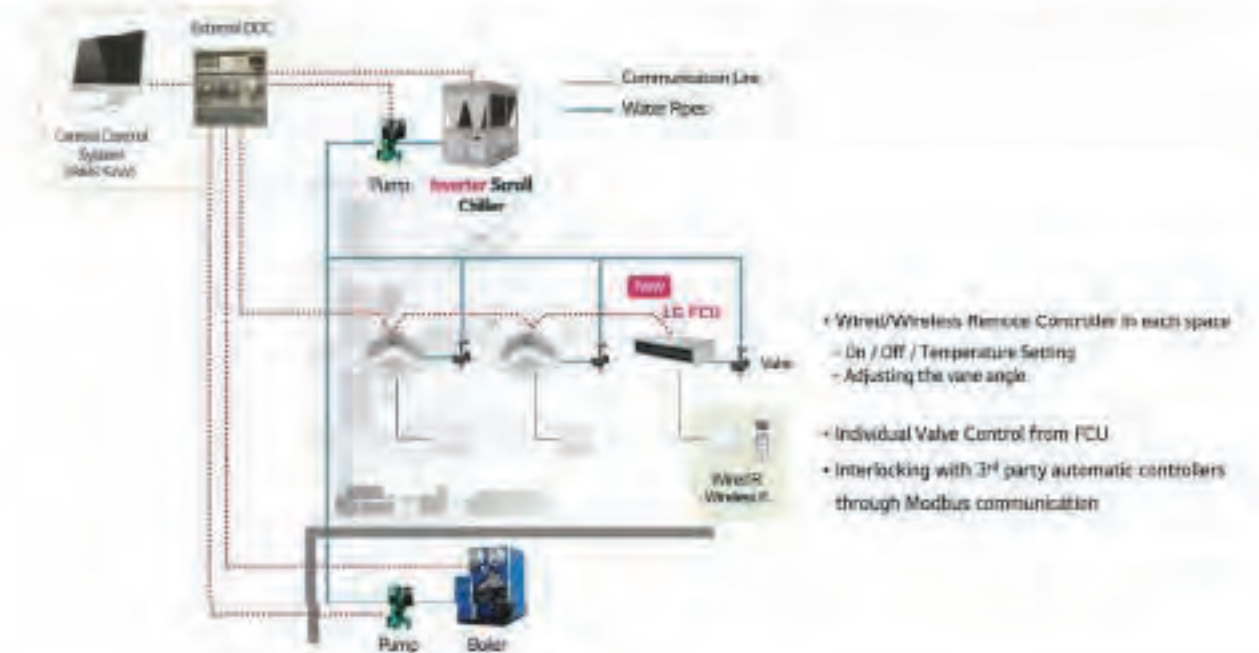




Stylish Design Panel (U-style 4Way cassette)


New 4 way cassette panel adapted a unibody shape and fits into the ceiling cell size.

Compact Size

Panel size is fit into the ceiling tile.



Interior fit



Lineless surface



Detachable corner




Unibody shape (No inlet line)

※ U-Style panel corresponds to the PTC03FW0 panel for WFAA010 / 027 / 032 / 041CG0A models.

High Ceiling Mode

Airflow in a space with a 4.2m ceiling height is possible with this indoor unit. Furthermore, air flow can be strengthened by adjusting the fan speed.

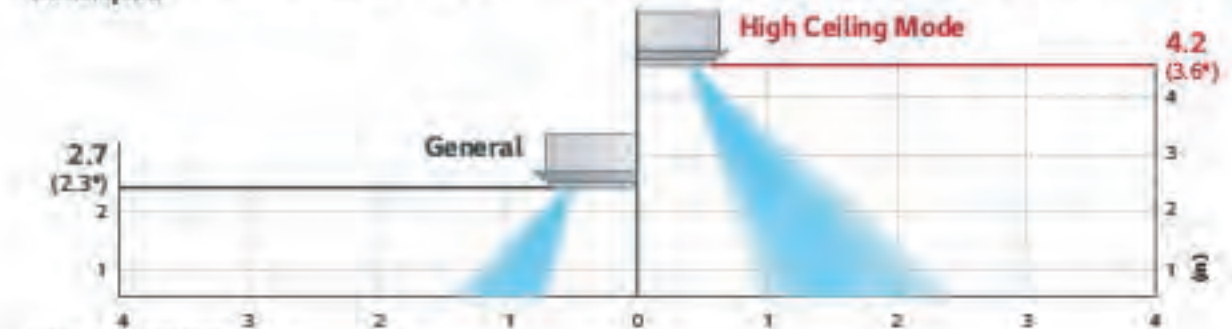

* For models less than 00 LkW

Wi-Fi Remote Control

Control your air conditioners using the smart devices as Android or iOS based smartphones and voice commands via Google assistant.



Access your air conditioner anytime and from anywhere

Operation under the revised weather conditions before changing conditions impact indoor comfort.



Simple operation for various functions

- On/Off **
- Mode Selection **
- Current temperature **
- Set temperature **
- Set fan speed **
- Vane Control
- Reservation
- Energy Monitoring
- Filter Management
- Smart Diagnosis




※ Search "LG ThinQ" on Google market or App store then download the app.
* Wi-Fi modem (PWFMD0200) is required by option.

** This function is used by Google assistant & Amazon Alexa.
※ In some countries the use of the Google assistant & Amazon Alexa system may be restricted.

Convenient Panel Installation


The detachable corner design makes it easy to adjust the hanger during installation and helps to easily check leakages in the drain connection pipe. Moreover, button type holder design makes it easy to install the panel to the body.

Detachable Corner Design

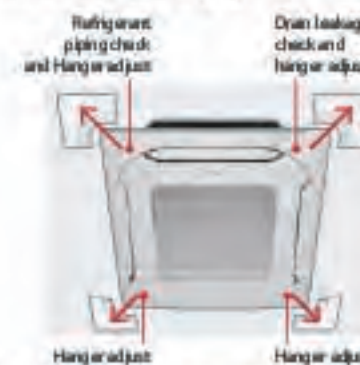


※ The detachable corner design is only applicable to the U-Style panel.

WF4A018CG0A / WF4A027CG0A
WF4A032CG0A / WF4A041CG0A
WF4A060CG0A



INDOOR			WF4A018CG0A	WF4A027CG0A	WF4A032CG0A	WF4A041CG0A	WF4A060CG0A	
Power Supply		D, V, Hz	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	
Running Current by Voltage		A	0.37-0.37-0.37	0.38-0.38-0.38	0.40-0.40-0.40	0.35-0.42-0.42	0.62-0.69-0.69	
Capacity	Cooling	Condition A	1.8 (1,548)	2.7 (2,322)	3.2 (2,752)	4.1 (3,525)	6.0 (5,159)	
		Condition B	1.2 (1,032)	1.8 (1,548)	2.2 (1,892)	2.8 (2,408)	4.0 (3,439)	
		Condition C	1.5 (1,290)	2.3 (1,978)	2.8 (2,408)	3.6 (3,095)	4.9 (4,213)	
		Condition D	0.7 (602)	1.2 (1,032)	1.4 (1,204)	1.8 (1,548)	2.5 (2,150)	
	Heating	Condition A	1.9 (1,634)	2.7 (2,322)	3.3 (2,837)	4.5 (3,889)	7.2 (6,191)	
		Condition B	2.2 (1,892)	3.1 (2,666)	3.9 (3,353)	5.4 (4,643)	8.5 (7,309)	
		Condition A	5.7	8.2	10.0	13.5	19.0	
		Condition B	4.6	6.6	8.0	10.8	14.4	
Water Flow Rate	Cooling	Condition C	5.7	8.2	10.0	13.5	19.0	
		Condition D	3.4	4.9	6.0	8.1	12.1	
	Heating	Condition A	6.1	8.8	10.0	13.5	22.5	
		Condition B	5.7	8.2	10.0	13.5	19.0	
Heat Loss	Cooling	Condition A	21.5	32.0	47.7	43.7	38.2	
		Condition B	13.7	20.3	30.3	27.6	23.8	
		Condition C	21.5	32.0	47.7	43.7	38.2	
		Condition D	8.1	12.0	17.9	16.4	17.0	
	Heating	Condition A	30.3	40.7	53.8	56.5	57.2	
		Condition B	26.2	36.3	53.8	56.5	42.1	
		Nominal	W	12	15	20	43	73
		Running Current	Nominal	A	0.37	0.38	0.40	0.42
Fan	Type	-	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan	
	Air Flow Rate (H / M / L)	m ³ /min	65 / 35 / 50	70 / 65 / 60	85 / 80 / 70	120 / 100 / 80	190 / 170 / 150	
Fan Motor	Type	-	BLDC	BLDC	BLDC	BLDC	BLDC	
	Drive	-	CCW	CCW	CCW	CCW	CCW	
	Output	W x No	30 x 1	30 x 1	30 x 1	43 x 1	40 x 1	
	FLA (Full Load Ampere)	A	0.37	0.38	0.40	0.42	0.69	
Dimensions	Net (W x H x D)	mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 256 x 570	840 x 204 x 840	
Weight	Net	kg	12.9	12.9	12.9	14.0	20.8	
	Shipping	kg	15.7	15.7	15.7	16.3	24.9	
Air Filter	Type	-	-	-	-	-		
Temperature Control	-	-	Microprocessor, Thermostat for cooling and heating					
Sound Absorbing / Thermal Insulation Material	-	-	Foamed polystyrene					
Protection Device	-	-	Fuse					
Water	Inlet	-	BSPP G 3/4" (male)					
Connecting Pipes	Outlet	-	BSPP G 3/4" (male)					
Sound Pressure Level	Cooling (H / M / L)	dB (A)	35 / 34 / 33	38 / 37 / 35	43 / 40 / 38	48 / 43 / 38	48 / 46 / 42	
	Heating (H / M / L)	dB (A)	35 / 34 / 33	38 / 37 / 35	43 / 40 / 38	48 / 43 / 38	48 / 46 / 42	
Sound Power Level	Cooling (H / M / L)	dB (A)	40 / 39 / 38	44 / 42 / 40	50 / 46 / 44	56 / 50 / 45	55 / 53 / 49	
	Heating (H / M / L)	dB (A)	40 / 39 / 38	44 / 42 / 40	50 / 46 / 44	56 / 50 / 45	55 / 53 / 49	
Connecting Cable	Communication Cable (VCTF-3B)	mm ² x core	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	
	Name	-	PT-QCHWD	PT-QCHWD	PT-QCHWD	PT-QCHWD	PT-MCHWD	
Decoration Panel #1 (Accessory)	Dimensions (W x H x D)	mm	620 x 34 x 620	620 x 34 x 620	620 x 34 x 620	620 x 34 x 620	950 x 35 x 950	
	Color	-	Morning fog	Morning fog	Morning fog	Morning fog	Morning fog	
	RAL Code	-	120-4	120-4	120-4	120-4	120-4	
	Name	-	-	-	-	-	-	
Decoration Panel #2 (Accessory)	Dimensions (W x H x D)	mm	-	-	-	-	-	
	Color	-	-	-	-	-	-	
	RAL Code	-	-	-	-	-	-	

WF4A072CG0A / WF4A090CG0A
WF4A105CG0A / WF4A130CG0A




INDOOR			WF4A072CG0A	WF4A090CG0A	WF4A105CG0A	WF4A130CG0A	
Power Supply		D, V, Hz	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	1, 220-230-240, 50/60	
Running Current by Voltage		A	0.75-0.88-0.88	0.89-0.89-0.89	1.4-1.39-1.39	1.7-1.88-1.88	
Capacity	Cooling	Condition A	7.2 (6,191)	9.0 (7,739)	10.5 (9,028)	13.0 (11,178)	
		Condition B	4.8 (4,127)	6.0 (5,159)	7.0 (6,019)	8.7 (7,481)	
		Condition C	5.8 (4,987)	7.3 (6,277)	8.5 (7,309)	10.5 (9,028)	
		Condition D	2.9 (2,494)	3.7 (3,181)	4.3 (3,697)	5.3 (4,557)	
	Heating	Condition A	7.9 (6,793)	9.7 (8,340)	11.1 (9,544)	13.3 (11,436)	
		Condition B	9.3 (7,997)	11.5 (9,888)	13.4 (11,522)	15.7 (13,500)	
		Condition A	21.0	28.0	33.0	37.8	
		Condition B	15.9	21.2	25.0	28.6	
Water Flow Rate	Cooling	Condition C	21.0	28.0	33.0	37.8	
		Condition D	13.4	17.8	21.0	24.1	
	Heating	Condition A	24.5	28.0	33.0	39.1	
		Condition B	21.0	28.0	33.0	37.8	
Heat Loss	Cooling	Condition A	45.9	56.3	60.4	68.2	
		Condition B	28.4	31.5	44.0	38.9	
		Condition C	45.9	56.3	60.4	68.2	
		Condition D	20.4	23.5	31.3	26.4	
	Heating	Condition A	67.5	48.9	68.3	71.7	
		Condition B	49.6	48.9	68.3	68.3	
		Nominal	W	93	103	167	246
		Running Current	Nominal	A	0.88	0.89	1.39
Fan	Type	-	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan	
	Air Flow Rate (H / M / L)	m ³ /min	210 / 180 / 170	250 / 210 / 190	310 / 280 / 250	410 / 360 / 300	
Fan Motor	Type	-	BLDC	BLDC	BLDC	BLDC	
	Drive	-	CCW	CCW	CCW	CCW	
	Output	W x No	40 x 1	156 x 1	156 x 1	136 x 1	
	FLA (Full Load Ampere)	A	0.88	0.89	1.39	1.88	
Dimensions	Net (W x H x D)	mm	840 x 204 x 840	840 x 246 x 840	840 x 246 x 840	840 x 288 x 840	
Weight	Net	kg	20.8	23.2	23.2	25.1	
	Shipping	kg	24.9	27.5	27.5	29.7	
Air Filter	Type	-	-	-	-		
Temperature Control	-	-	Microprocessor, Thermostat for cooling and heating				
Sound Absorbing / Thermal Insulation Material	-	-	Foamed polystyrene				
Protection Device	-	-	Fuse				
Water	Inlet	-	BSPP G 3/4" (male)				
Connecting Pipes	Outlet	-	BSPP G 3/4" (male)				
Sound Pressure Level	Cooling (H / M / L)	dB (A)	51 / 48 / 46	51 / 47 / 43	55 / 53 / 51	57 / 53 / 50	
	Heating (H / M / L)	dB (A)	51 / 48 / 46	51 / 47 / 43	55 / 53 / 51	57 / 53 / 50	
Sound Power Level	Cooling (H / M / L)	dB (A)	57 / 55 / 52	59 / 54 / 51	63 / 61 / 58	65 / 61 / 57	
	Heating (H / M / L)	dB (A)	57 / 55 / 52	59 / 54 / 51	63 / 61 / 58	65 / 61 / 57	
Connecting Cable	Communication Cable (VCTF-3B)	mm ² x core	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	
	Name	-	PT-MCHWD	PT-MCHWD	PT-MCHWD	PT-MCHWD	
Decoration Panel #1 (Accessory)	Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 25 x 950	950 x 35 x 950	950 x 35 x 950	
	Color	-	Morning fog	Morning fog	Morning fog	Morning fog	
	RAL Code	-	120-4	120-4	120-4	120-4	
	Name	-	-	-	-	-	
Decoration Panel #2 (Accessory)	Dimensions (W x H x D)	mm	-	-	-	-	
	Color	-	-	-	-	-	
	RAL Code	-	-	-	-	-	



High Head Drain Pump

High head drain pump automatically drains water up to a height of 700mm of drain-head height.

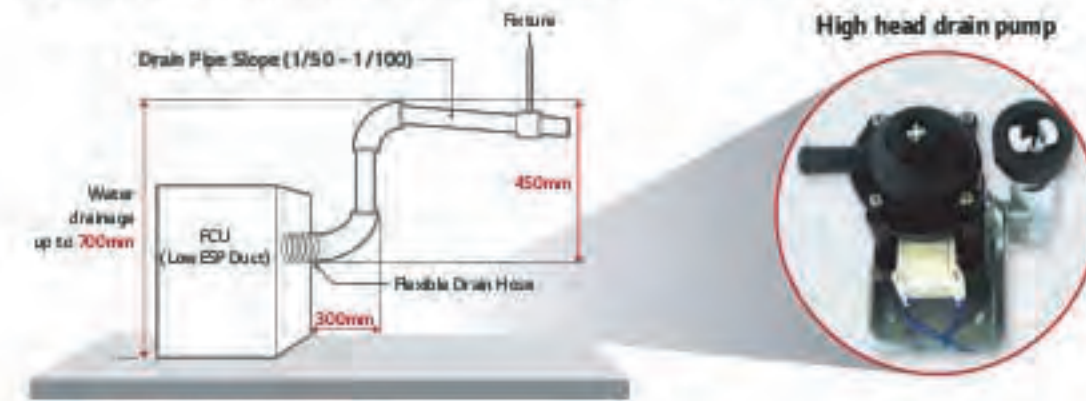

All of LG's FCU's have a high head drain pump built in.

Flexible Installation

LG's Low ESP Duct FCU allows air intake from the rear or the bottom sides according to requirements.




Quiet Operation

The noise level of Low ESP Ducts does not interfere with conversation at all.

Model	Sound Pressure (dB(A))		
	High	Medium	Low
WPCA012RGOA	31	30	29
WPCA018RGOA	33	32	31
WPCA025RGOA	31	30	29
WPCA032RGOA	33	32	31
WPCA039RGOA	28	27	26
WPCA055RGOA	31	28	26
WPCA066RGOA	36	34	31

* Test condition: Temperature (Cooling) 27°C DB / 19°C WB, 35°C DB / 24°C WB
 * Based on Low speed of WPCA032RGOA, WPCA055RGOA model
 * Sound level may vary depending on the place or surrounding conditions in which the equipment is installed.

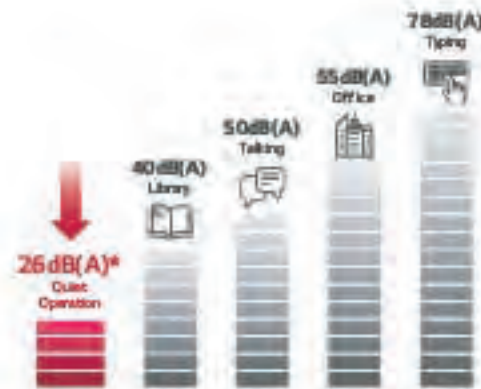

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. Two thermistors can check the optimal indoor air temperature for a more comfortable environment.


Compares temperatures sensed from different positions, and automatically selects the optimal temperature for users.

Need to connect the wired remote controller.



Easy Service & Maintenance

Service engineers don't need to open the whole panel for maintenance, since the panel is divided into 2 components; one for heat exchanger and the other for fans/motor. User can easily detach and re-attach the air filter in the available limited space.

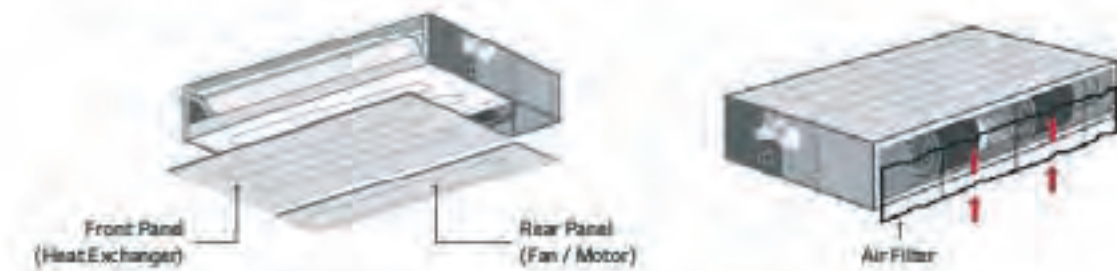

WFA012RGOA / WFA018RGOA
WFA025RGOA / WFA032RGOA



INDOOR			WFA012RGOA	WFA018RGOA	WFA025RGOA	WFA032RGOA
Power Supply	Ø, V, Hz		1, 220-230-240, 50	1, 220-230-240, 50	1, 220-230-240, 50	1, 220-230-240, 50
Running Current by Voltage	A		0.29-0.29-0.29	0.31-0.31-0.31	0.32-0.32-0.32	0.35-0.35-0.35
Capacity	Cooling	Condition A	1.3 (1,118)	1.6 (1,548)	2.5 (2,150)	3.2 (2,752)
		Condition B	1.1 (946)	1.5 (1,290)	2.1 (1,806)	2.7 (2,322)
		Condition C	1.2 (1,032)	1.6 (1,376)	2.2 (1,892)	2.8 (2,408)
		Condition D	0.7 (602)	0.9 (774)	1.3 (1,118)	1.6 (1,376)
Heating	Condition A	2.0 (1,721)	2.6 (2,408)	3.2 (2,752)	3.8 (3,267)	
	Condition B	2.1 (1,806)	3.0 (2,581)	3.6 (3,095)	4.4 (3,783)	
Water Flow Rate	Cooling	Condition A	4.0	5.6	7.4	9.3
		Condition B	4.0	5.6	7.4	9.3
		Condition C	4.0	5.6	7.4	9.3
		Condition D	2.7	4.0	5.0	6.3
Heating	Condition A	6.2	8.5	9.7	11.4	
	Condition B	4.0	5.6	7.4	9.3	
Head Loss	Cooling	Condition A	1.2	3.3	7.6	11.8
		Condition B	1.2	3.3	7.6	11.8
		Condition C	1.2	3.3	7.6	11.8
		Condition D	0.8	2.3	5.3	8.2
	Heating	Condition A	4.4	8.5	12.5	17.8
		Condition B	2.0	3.5	6.9	11.4
Power Input	Nominal	W	8	17	20	27
Running Current	Nominal	A	0.29	0.31	0.32	0.35
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Air Flow Rate (H / M / L)	m³ / min	5.5 / 5.0 / 4.5	8.0 / 7.0 / 6.0	8.0 / 7.5 / 7.0	9.8 / 8.8 / 8.0
	External Static Pressure (Standard mode)	mmAq	0	0	0	0
	External Static Pressure (High mode)	mmAq	0	0	0	0
Fan Motor	Type	-	BLDC	BLDC	BLDC	BLDC
	Drive	-	CW	CW	CW	CW
	Output	W x No	19 x 1	19 x 1	18 x 1 + 5 x 1	19 x 1 + 5 x 1
	FLA (Full Load Ampere)	A	0.29	0.31	0.32	0.35
Dimensions	Net (W x H x D)	mm	700 x 190 x 700	700 x 190 x 700	900 x 190 x 700	900 x 190 x 700
	Shipping (W x H x D)	mm	842 x 235 x 766	842 x 235 x 766	1,042 x 235 x 766	1,042 x 235 x 766
Weight	Net	kg	17.5	17.5	22.0	22.0
	Shipping	kg	21.9	21.9	26.9	26.9
Air Filter	Type	-	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Temperature Control	-	-	Microprocessor Thermostat for cooling and heating			
Sound Absorbing / Thermal Insulation Material	-	-	Foamed polystyrene	Foamed polystyrene	Foamed polystyrene	Foamed polystyrene
Protection Device	-	-	Fuse	Fuse	Fuse	Fuse
Water	Inlet	-	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)
Connecting Pipes	Outlet	-	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)
Sound Pressure Level	Cooling (H / M / L)	dB(A)	31 / 30 / 29	33 / 32 / 31	31 / 30 / 29	33 / 32 / 31
	Heating (H / M / L)	dB(A)	31 / 30 / 29	33 / 32 / 31	31 / 30 / 29	33 / 32 / 31
Sound Power Level	Cooling (H / M / L)	dB(A)	38 / 36 / 35	46 / 43 / 39	41 / 40 / 39	46 / 43 / 41
	Heating (H / M / L)	dB(A)	38 / 36 / 35	46 / 43 / 39	41 / 40 / 39	46 / 43 / 41
Connecting Cable	Communication Cable (VCTF-SB)	mm² x cores	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5

WFA039RGOA / WFA055RGOA
WFA066RGOA



INDOOR			WFA039RGOA	WFA055RGOA	WFA066RGOA
Power Supply	Ø, V, Hz		1, 220-230-240, 50	1, 220-230-240, 50	1, 220-230-240, 50
Running Current by Voltage	A		0.26-0.37-0.37	0.36-0.44-0.44	0.70-0.71-0.71
Capacity	Cooling	Condition A	3.9 (3,353)	5.0 (4,299)	6.6 (5,675)
		Condition B	3.3 (2,837)	4.2 (3,611)	5.5 (4,729)
		Condition C	3.5 (3,009)	4.4 (3,783)	5.9 (5,073)
		Condition D	2.0 (1,721)	2.5 (2,150)	3.3 (2,837)
Heating	Condition A	4.2 (3,611)	5.3 (4,557)	6.6 (5,675)	
	Condition B	5.0 (4,299)	6.4 (5,503)	8.0 (6,879)	
Water Flow Rate	Cooling	Condition A	13.3	17.0	21.7
		Condition B	13.3	17.0	21.7
		Condition C	13.3	17.0	21.7
		Condition D	9.0	11.5	14.7
Heating	Condition A	13.3	17.0	21.7	
	Condition B	13.3	17.0	21.7	
Head Loss	Cooling	Condition A	21.7	39.0	53.9
		Condition B	21.7	39.0	53.9
		Condition C	21.7	39.0	53.9
		Condition D	5.7	27.2	37.6
	Heating	Condition A	30.3	48.3	71.7
		Condition B	30.3	48.3	71.7
Power Input	Nominal	W	29	44	81
Running Current	Nominal	A	0.37	0.44	0.71
Fan	Type	-	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Air Flow Rate (H / M / L)	m³ / min	10.7 / 9.3 / 7.2	14.4 / 10.7 / 9.3	20.1 / 17.3 / 14.4
	External Static Pressure (Standard mode)	mmAq	0	0	0
	External Static Pressure (High mode)	mmAq	0	0	0
Fan Motor	Type	-	BLDC	BLDC	BLDC
	Drive	-	CW	CW	CW
	Output	W x No	19 x 2	19 x 2	19 x 2
	FLA (Full Load Ampere)	A	0.37	0.44	0.71
Dimensions	Net (W x H x D)	mm	1,100 x 190 x 700	1,100 x 190 x 700	1,100 x 190 x 700
	Shipping (W x H x D)	mm	1,242 x 235 x 766	1,242 x 235 x 766	1,242 x 235 x 766
Weight	Net	kg	26.2	26.2	26.2
	Shipping	kg	30.7	30.7	30.7
Air Filter	Type	-	Pre Filter	Pre Filter	Pre Filter
Temperature Control	-	-	Microprocessor Thermostat for cooling and heating		
Sound Absorbing / Thermal Insulation Material	-	-	Foamed polystyrene	Foamed polystyrene	Foamed polystyrene
Protection Device	-	-	Fuse	Fuse	Fuse
Water	Inlet	-	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)
Connecting Pipes	Outlet	-	BSPF G 3/4" (male)	BSPF G 3/4" (male)	BSPF G 3/4" (male)
Sound Pressure Level	Cooling (H / M / L)	dB(A)	28 / 27 / 26	31 / 28 / 26	38 / 34 / 31
	Heating (H / M / L)	dB(A)	28 / 27 / 26	31 / 28 / 26	38 / 34 / 31
Sound Power Level	Cooling (H / M / L)	dB(A)	43 / 41 / 40	47 / 42 / 41	55 / 52 / 48
	Heating (H / M / L)	dB(A)	43 / 41 / 40	47 / 42 / 41	55 / 52 / 48
Connecting Cable	Communication Cable (VCTF-SB)	mm² x cores	1.0 - 1.5	1.0 - 1.5	1.0 - 1.5

244-317

CONTROL SOLUTIONS

INDIVIDUAL CONTROL / CENTRALIZED CONTROL / INTEGRATION DEVICE



The perfect choice for innovative building management
LG BECON HVAC SOLUTION

Innovative building management solution in your hands.
 Our optimized solutions provide integrated control for customers configuration of various equipment in building and intuitive interface to maximize efficiency of operations.



ENERGY SAVING



SMART MANAGEMENT



EASY EXPANDABILITY

SMART MANAGEMENT



Standard III Remote Controller



Premium Remote Controller



Wi-Fi Modem (with LG ThinQ)

EASY EXPANDABILITY



Modbus Gateway



ACP LonWorks



Dry Contact



ACP 5



ACS ID Module



ACU ID Module

ENERGY SAVING



PDI



AC Smart 5




AC Manager 5



AC Ez Touch

CONTROL SYSTEM ARCHITECTURE

LG BECON HVAC SOLUTION offers a diverse range of effective control solutions that satisfy specific needs of each building and its user scene. These control systems are equipped with user-friendly interface, flexible interlocking environment, energy management and smart individual controller for optimized controlling conditions and smart building management.

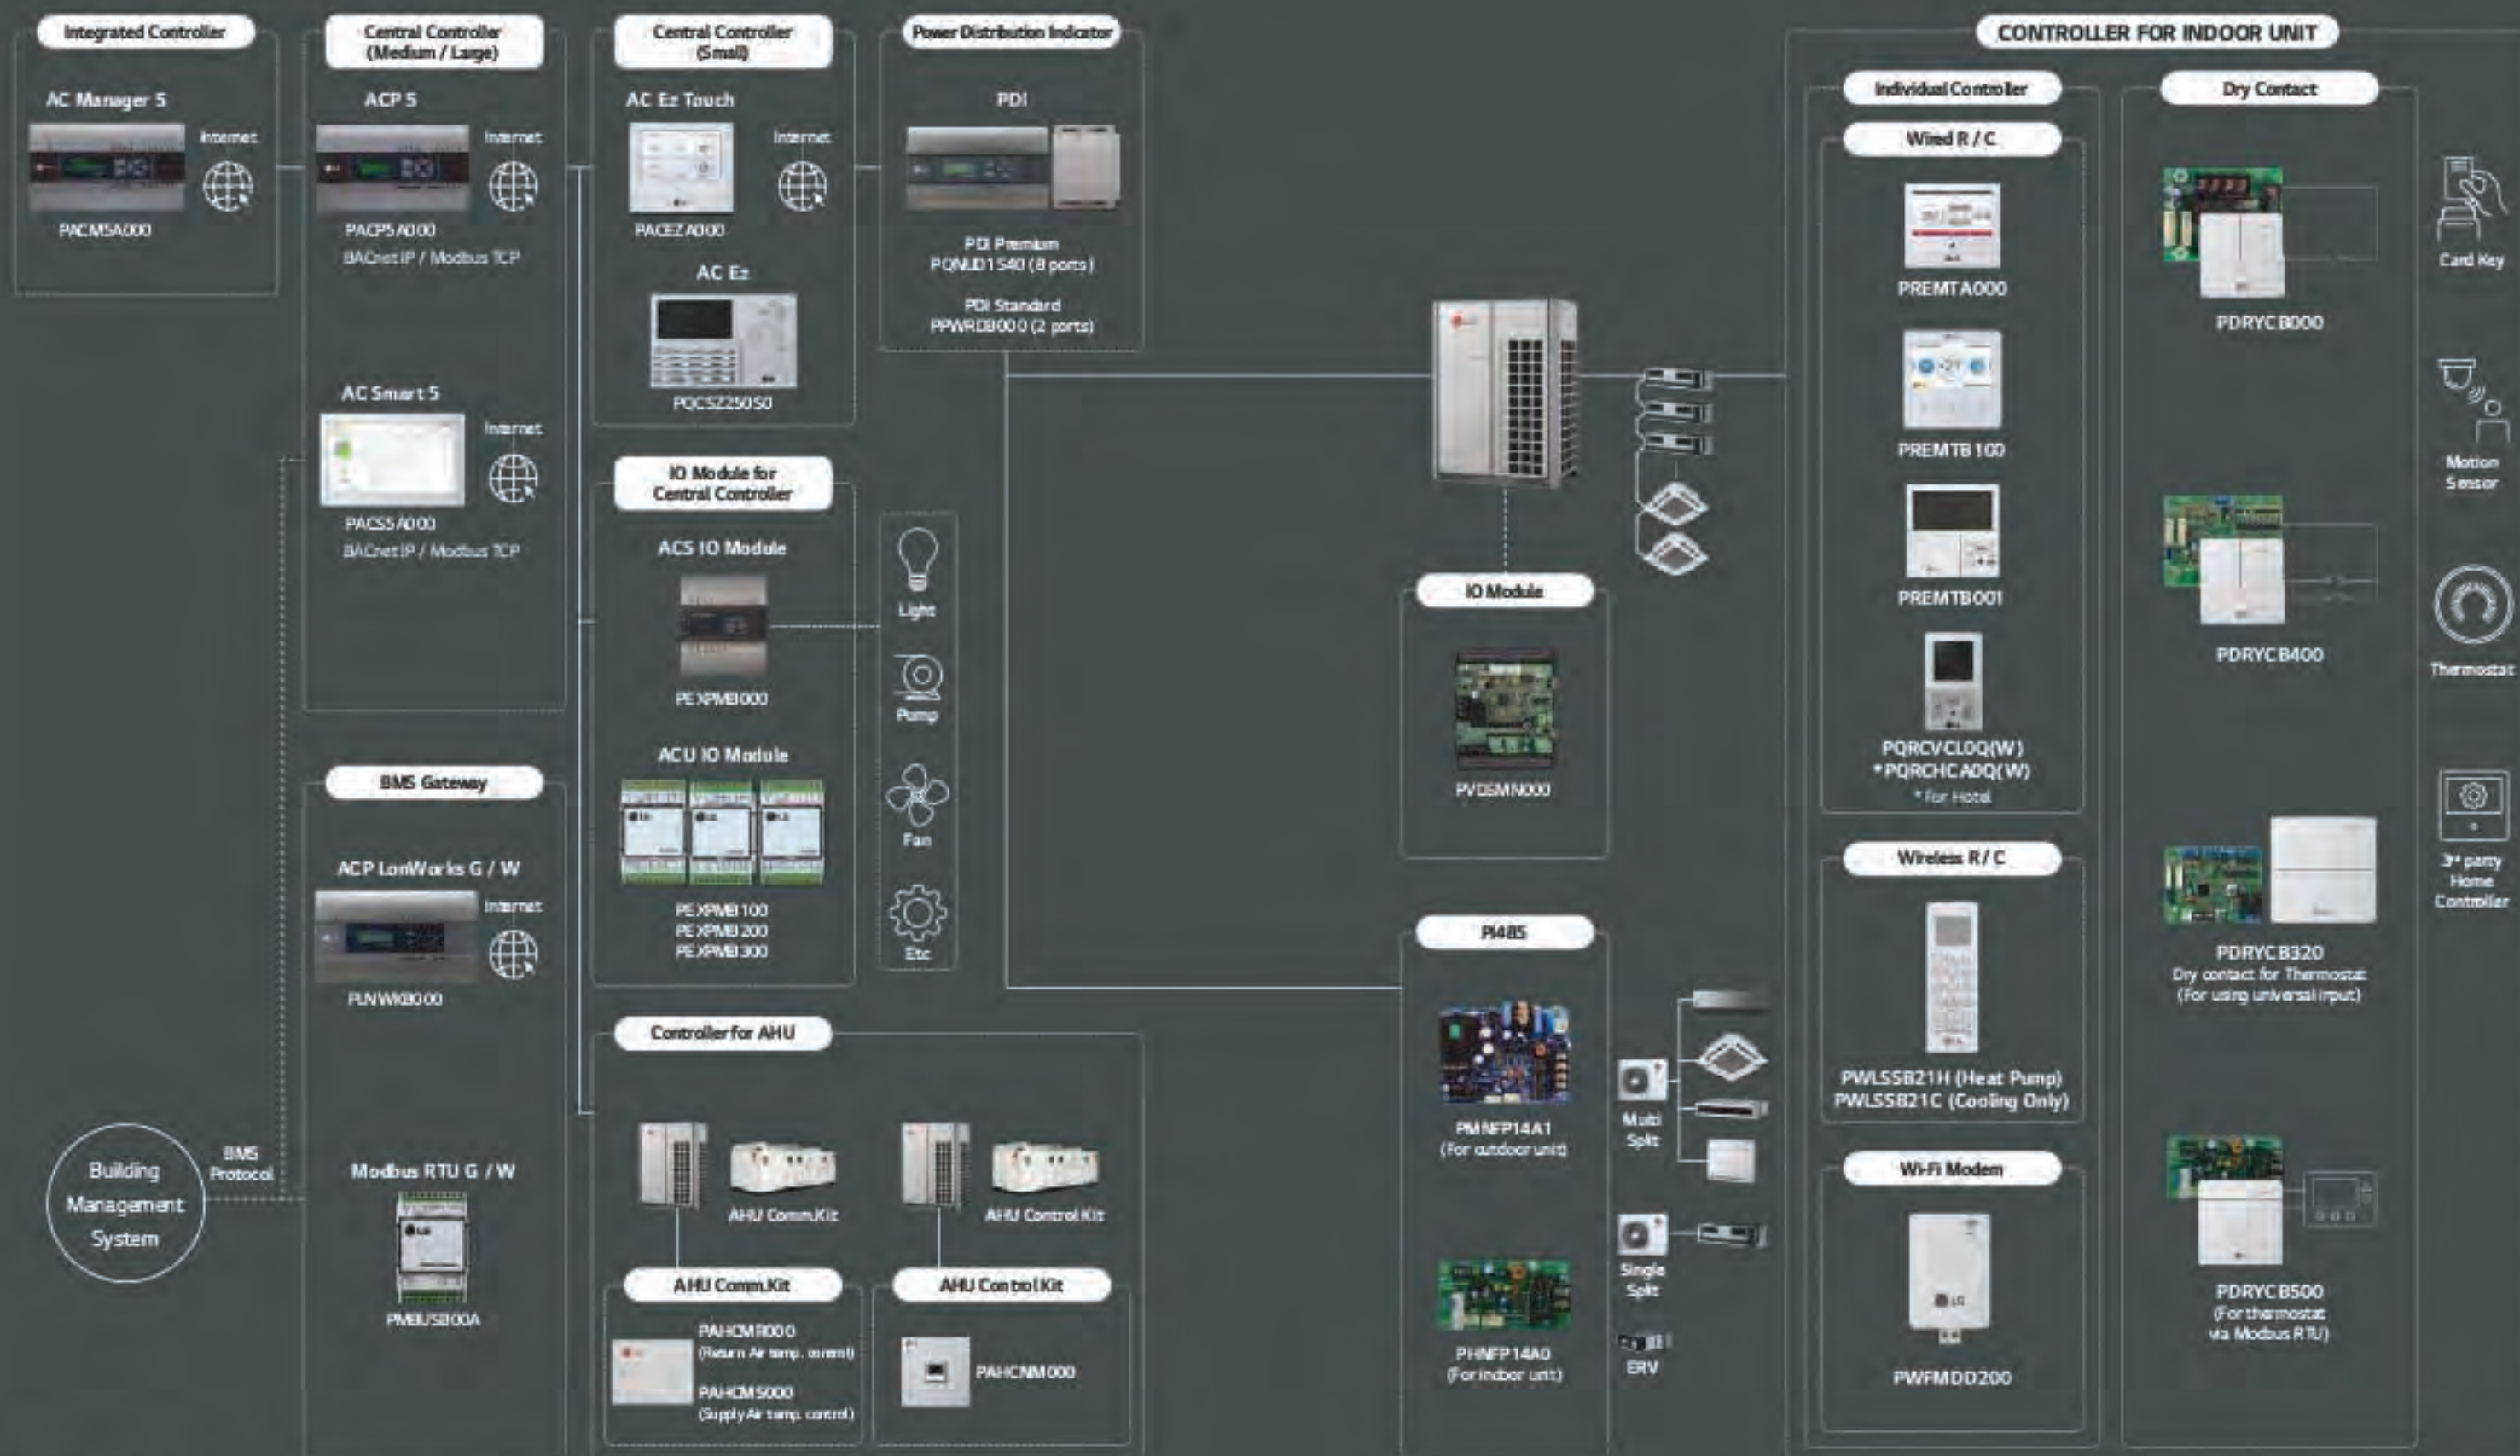



Feature Functions

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Module
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB100 PREMTB10	PREMTB001 PREMTB01	PQRCYCLO0 PQRCYCLOQW	PQRCYCA00 PQRCYCA0QW	PWLSSE21H (H/P) PWLSSE21C (C/O)	PWFMD0100
Basic							
On / Off	○	○	○	○	○	○	○
Fan Speed Control	○	○	○	○	○	○	○
Temperature Setting	○	○	○	○	○	○	○
Mode	○	○	○	○	-	○	○
Auto Swing	○	○	○	○	○	○	○
Vane Control (Louver Angle)	○	○	○	○	○	○	○
ESP (External Static Pressure)	○	○	○	○	○	-	-
Electric Failure Compensation	○	○	○	○	○	-	○
Indoor Temperature Display	○	○	○	○	○	○	○
All Button Lock (Child Lock)	○	○	○	○	○	-	-
Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Wi-Fi AP Mode Setting	○	○	○	○	○	○	-
Additional Mode Setting ¹⁾	○	○	○	-	-	-	-
Time Display	○	○	○	-	-	○	-
Humidity Display	○	○	-	-	-	-	-
Advanced Lock (Mode, Set point, Set point range, On / Off lock)	Advanced Lock	Advanced Lock	-	-	-	-	-
Filter Sign	○	○	○	-	-	-	-
Advanced							
Energy Management ²⁾	○	○	○	-	-	-	-
Dual Set Point	○	○	-	-	-	-	-
Human Detection	-	○	-	-	-	-	-
Temp. Humidity Compensation	○	○	-	-	-	-	-
Air Purify Control	-	○	-	-	-	○	○
Air Quality Level	-	○	-	-	-	-	○
Dual Vane (6 Airflows mode)	-	○	-	-	-	○	○
Operation Status LED	○	○	○	○	○	-	-
Wireless Remote Controller Receiver	○ ³⁾	-	○ [*]	○ [*]	○ [*]	-	-
ETC							
Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono	-
Size (W x H x D, mm)	137 x 121 x 165	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 25	48 x 68 x 14
Black Control for Screen Saver	○	○	-	-	-	-	-

○ : Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product.
 2) Centralized control (PAC22A000 / PAC33A000 / PAC35A000 / PUNWY3000) and PGI (P0NLIC1540 / PFWTDB000) should be installed for this function.
 3) For ceiling type duct.
 Note:
 1. Indoor unit should have functions requested by the controller.
 2. If you need more detail, please refer to the manual of product. (<http://parts.lg.com> | Home > DocLibrary > Manual)



Design

- 4.3 inch color LCD / Intuitive GUI
- Seamless design / Touch button
- Humidity sensor embedded

Comfort & Air Purification

- CO₂ level monitoring (For ERV)
- Air quality level monitoring
- Air purify control

Energy Contents

- Power consumption monitoring
- Operation time monitoring
- Temperature setback
- Time limit control

Advanced Functions

- Comfort cooling setting
- Smart Load Control setting
- Outdoor unit low noise setting
- Defrost noise setting
- ODU capacity control
- Schedule functions



Standard III Wired Remote Controller

PREMTB100 (White) / PREMTBB10 (Black)

4.3 inch colored screen with modern design.



MODEL NAME	PREMTB100 / PREMTBB10
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting**	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling
Auto Swing	○
Vane Control (Lower direction)	○
ESP (External Static Pressure) *	○
Reservation	Simple / Sleep / On & Off time / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Lock	All / On & Off / Mode / Set temperature range
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage * / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Air Purify Control**	○
Air Quality Level *	○
Indoor Temperature Display	○
Indoor Humidity Display	○
Human Detection	○
Display	4.3 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	120 x 120 x 16
Back Light for Screen Saver	○
Home Leave	2 set points control

© : Applied - / Not Applied
 1) The function is available in some product. (Refer to the product detail book).
 2) The function is available for duct type.
 3) The function requires PDI (PQAD1540 / PPHWCB000) to be installed.
 4) The function is available for indoor units that provide corresponding function.
 Note:
 1. Indoor unit needs to have functions requested by the controller.
 2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump it may not work properly.

Standard III Wired Remote Controller

Air Quality Level Display

Easy check for indoor air quality

PM10 / PM2.5 / PM1.0 - Status / Monitoring




CLASSIFICATION	GOOD	MODERATE	UNHEALTHY	POOR
* PM10 (µg / m3)	0 - 54	55 - 154	155 - 254	255 -
* PM2.5 (µg / m3)	0 - 12	13 - 35	36 - 55	56 -
* PM1.0 (µg / m3)	0 - 12	13 - 35	36 - 55	56 -

Note: Display color may change depending on the region / country.
 This function is available for indoor unit that provide corresponding function.
 * PM (Particulate matter)
 - PM10 (Coarse Particulate matter) / PM2.5 (Fine Particulate matter) / PM1.0 (Ultra Fine Particulate matter)
 - PM designated as a carbon as like an asbestos, easily inhaled as carbon.
 * The dust diameter is under 10 micrometers, it is PM10. And under 2.5 micrometers it is PM2.5.

Environment Display

Displaying environment information for the more user comfort

Temperature / Humidity / Comfort level / CO₂ concentration

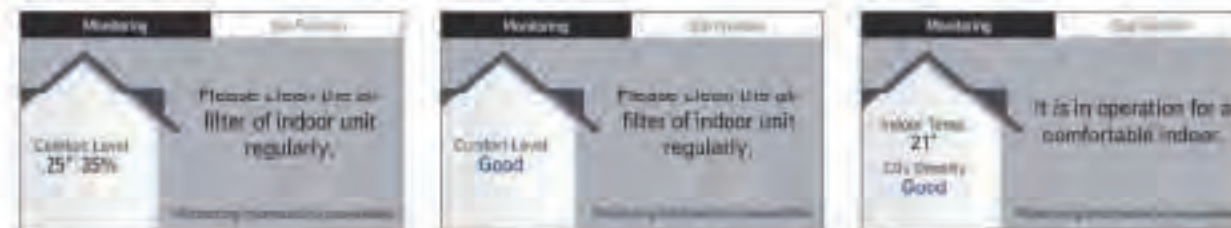

Dual Set Point

Auto changeover for convenience

Indoor unit will keep the indoor temperature within the range of dual set point by automatically switching the unit operation

Setback for energy savings and comfort

In the user's absence, the room temperature will remain between two set points rather than switching off, providing quick comfort when the mode is changed to 'occupied'

This function is for Heat Recovery system or Single heat pump. Otherwise, it is not guaranteed.



Energy Savings

Energy Management

Energy Monitoring & Alarm

Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.

* PFI (PQADR56) / PFIWB002 is required.



Instantaneous Power Check

Energy Usage Target Setting

Time Limit Control

Monitoring the unit's continuous running time

And prevent the wasting energy by turning the unit off automatically.



Schedule Function


Simple Schedule Status

Standard III remote controller provides dock type daily schedule.



Exception Day Settings

Possible to set up exceptional date on regular schedule.

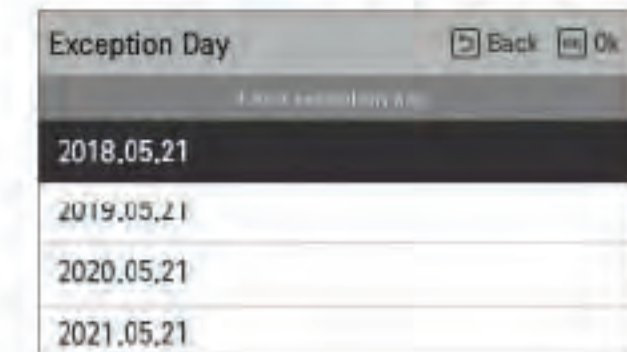

External Device On / Off


External Equipment Control

User can control the external equipment through additional contact signal output.



Customized Interlocking Control

User can create a automatic control pattern. For example, turning the temperature drops below or rises above a certain temperature.

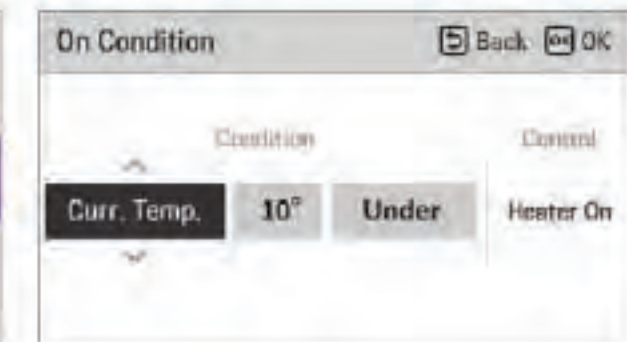

Premium Wired Remote Controller



Full Touch Screen



PREMTA000 1) / PREMTA000A 2) / PREMTA000B 3)

5 inch full touch screen with a premium design.



* Supported languages list
 1) English / Portuguese / Spanish / French
 2) English / Italian / Russian / Chinese
 3) English / German / Polish / Czech

MODEL NAME	PREMTA000 / PREMTA000A / PREMTA000B
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting 1)	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Lower deflection)	○
E.SP (Breath Static Pressure) 2)	○
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Fiber Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage 3) / Check Operation Time / Target Setting (Energy Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ 4)
Display	5 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	137 x 121 x 16.5
Back Light for Screen Save	○
Home Leave	2 set points control

○: Applied, - : Not Applied
 1) It might not be installed or operated at the port A product.
 2) This function is available for duct type.
 3) This function requires PDU(PQNAJ01540) / PDU(PQND0010) to be installed.
 4) For ceiling type ducted unit.
 Note: 1) Indoor unit needs to have functions requested by the controller.
 2, 2 set points control works normally with MLT V Heat Recovery and Single Split Heat Pump. But in case of MLT V Heat Pump, it may not work properly.

Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage by year
- Set the target usage and time



Easy Scheduling


- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy



Dual Set Point


- Auto changeover switching the operation mode automatically
- Setback (Leave Home) Changing status by occupied / unoccupied

* This function is only for Heat Recovery system and Single Heat pump.

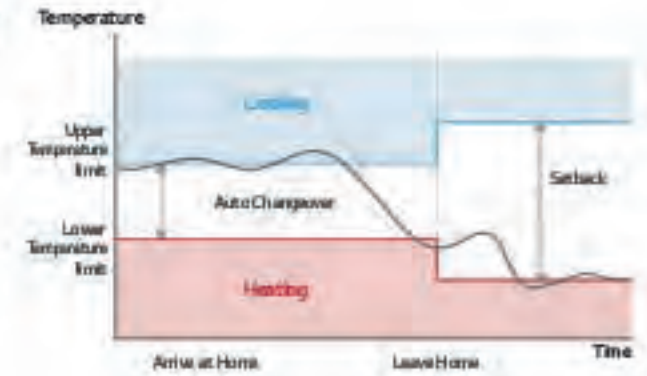

Group Control

- Max. 16 indoor units by one remote controller

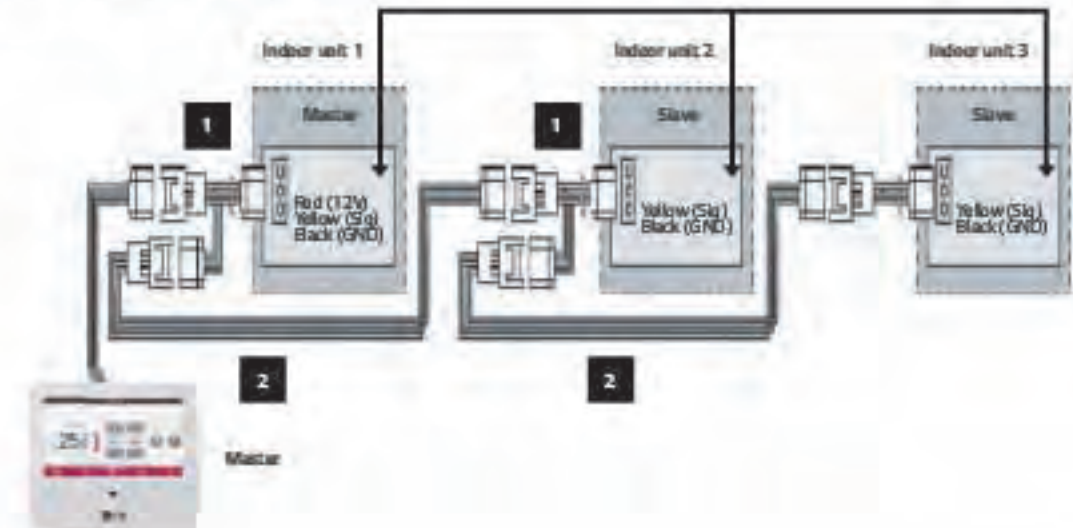

Standard II Wired Remote Controller

PREMTB001 / PREMTB01

Providing easy control of one or a group of indoor units with various functions.



Features & Benefits

- Wired remote controller that can implement various functions such as scheduling or filter alert.

MODEL NAME	PREMTB001 / PREMTB01
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Lower direction)	○
ESP (External Static Pressure)	○
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ¹⁾
Size (W x H x D, mm)	120 x 123 x 16
Back Light	○
Power Consumption Monitoring	○ ⁴⁾
Check Model Information	○

○: Applied, -: Not Applied
 1) For ceiling type indoor unit.
 2) This function requires PC1 (PQNE1540 / PFWB000) to be installed.
 Note: Indoor unit needs to have functions requested by the controller.

Simple Wired Remote Controller

PQRCVCL0QW (White) / PQRCVCL0Q (Black) / PQRCHCA0QW (White) / PQRCHCA0Q (Black)

A simple way to control office or hotel systems in a compact design.



Features & Benefits

- Small remote control with minimal functionality.

MODEL NAME	PQRCVCL0QW / PQRCVCL0Q	PQRCHCA0QW / PQRCHCA0Q
On / Off	○	○
Fan Speed Control	○	○
Temperature Setting	○	○
Mode	Cool / Heat / Dry / Fan / Auto	-
Auto Swing	○	○
Vane Control (Lower direction)	○	○
ESP (External Static Pressure)	○	○
Electric Failure Compensation	○	○
Child Lock	○	○
Indoor Temperature Display	○	○
Wireless Remote Controller Receiver	○ ¹⁾	○ ¹⁾
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Back Light	○	○

○: Applied, -: Not Applied
 1) For ceiling type indoor unit.
 Note: Indoor unit needs to have functions requested by the controller.

Wireless Remote Controller

PWLSSB21H (Heat Pump), PWLSSB21C (Cooling Only)

Handy and portable wireless type.




Features & Benefits

- Easy to use while moving.
- Main functions are available.

MODEL NAME	PWLSSB21H (H/P), PWLSSB21C (C/O)
On / Off	○
Fan Speed Control	○ ¹⁾
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Air Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	○
Vane Control (Lower direction)	○
Reservation	Sleep / On / Off
Time Display	○
Indoor Temperature Display	○
Sleep Mode Auto	MAX. 7 hours
Size (W x H x D, mm)	51 x 153 x 26

○: Applied, -: Not Applied
 1) For some products you can use "low" fan speed function.

Wi-Fi Modem

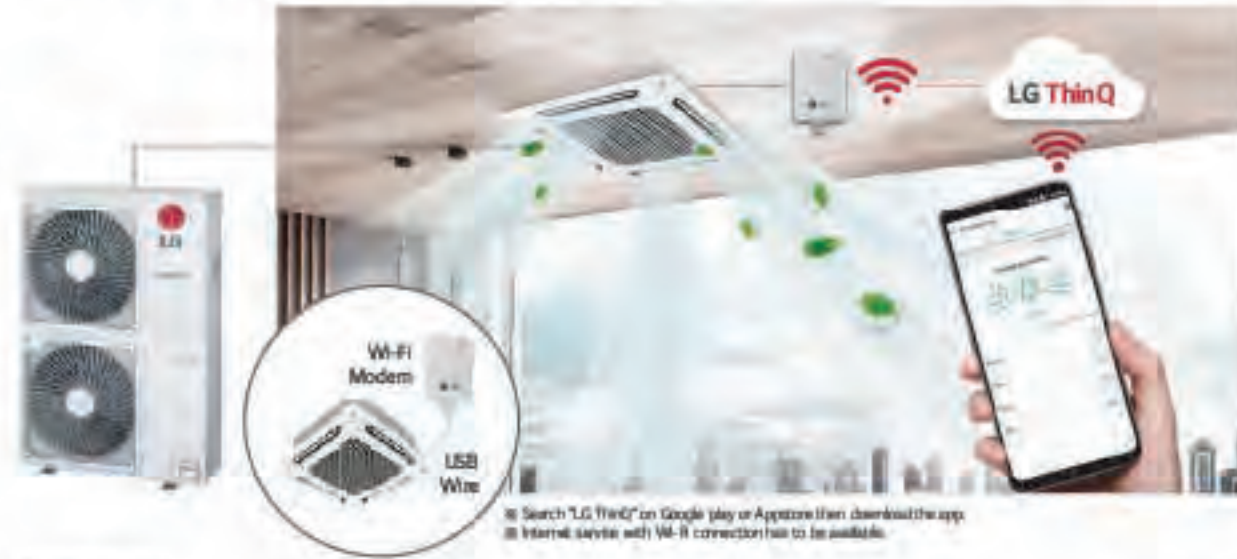

1) Search "LG ThinQ" on Google play or Appstore then download the app.
2) Internet service with Wi-Fi connection has to be available.

PWFMDD200

Control conditioners by using internet devices as Android or iOS smartphones.




Features & Benefits

- User can enjoy anytime, anywhere access with Wi-Fi equipped device through LG's ThinQ mobile app.
- This allows the user to access the unit remotely to switch unit on or off before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (LG ThinQ) is available.
- Simple operation for various functions.
- On / Off
- Operation Mode
- Current / Set Temperature
- Fan Speed
- Vane Control ¹⁾
- Reservation (Sleep, Weekly On / Off)
- Energy Monitoring ²⁾
- Filter Management
- Error Check
- Air Purify ³⁾

MODEL NAME	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interactable Products	System Air Conditioner ¹⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11b / g / n
Mobile Application	LG ThinQ (Android v4.1 (Jellybean) or higher; iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

¹⁾ Vane Control may not be possible according to the type of indoor unit.
²⁾ LG Certified controller and PDI test kit all are required for this function.
³⁾ For the compatibility with indoor unit, please contact regional LG office.
 Note:
 1. Functionality may be different according to each IDJ model.
 2. User interface of application shall be revised for its design and contents improvement.
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.

Installation Scene

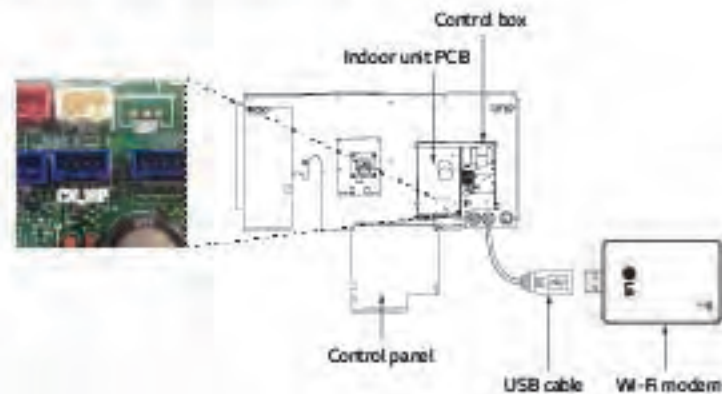

1) The Wi-Fi connection characteristics and reliability may be vary due to the type of Wi-Fi router and the installation environment. Please refer to the manual.

LG ThinQ Connectivity

Connection (Pairing) Order

- 1) Make LG account on LG ThinQ (Application) and login
- 2) Select the installed product and set AP (Access Point) mode by wired / wireless remote controller.
- 3) Select the Wi-Fi network that will be used and insert the password.
- 4) Product registration progress is completed.


* Some networks may not be supported.



LG ThinQ Mobile App

Simple operation for various functions

On, Off, Current Temp, Mode, Set Temp



Vane Control



Air Purify



Easy Management

Reservation



Energy Monitoring



Smart Diagnosis



Filter Management






Feature Functions

Controller Name		AC Ez	AC Ez Touch	AC Smart 5 ¹⁾	ACP 5 ⁴⁾	ACP LowWorks	AC Minus 5 ⁷⁾	
Model Name								
		PQCSZ25050	PACEZA000	PRCS5A000	PACP5A000	PUNWK000	PRCMSA000	
Product	DO	-	-	2	4	2	-	
	DI	-	1	2	10	2	-	
	IOUs	32	64	128	256	64	8,192	
	ERV	32	64	128	256	64	8,192	
	Max. Connectable No.	A / C + ERV	32	64	128	256	64	8,192
	AHU	-	-	16	16	16 ⁴⁾	16 x 32	
Compatibility	Chiller	-	-	5 Optional ⁵⁾	10 Optional ⁶⁾	-	10 x 32	
	Commercial Air Purifier ⁷⁾	-	-	64	128	-	128 x 32	
	Air Conditioner	○ ⁸⁾	○	○	○	○	○	
	Ventilation (ERV / ERV DX)	○ ⁸⁾	○	○	○	○	○	
	Heating	-	○	○	○	○	○	
	AHU	-	-	○	○	○	○	
	Chiller	-	-	○ ⁴⁾	○ ⁴⁾	-	○	
	Commercial Air Purifier ¹⁾	-	-	○ ⁴⁾	○ ⁴⁾	-	○	
	ACSIO	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Adt Drawing	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
Additional Function	Group Management	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Auto Change Over	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Set Back	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Dual Setpoint	-	○	○	○	○ ⁸⁾	○	
	Change Alarm	-	Filter	Filter	Filter	Filter	Filter ⁸⁾	
	Indoor Unit Lock	○ ⁸⁾	○	○	○	○ ⁸⁾	-	
	Cycle Monitoring	-	-	○	○	○ ⁸⁾	○	
	Air Purify	-	○ ⁸⁾	○ ⁴⁾	○ ⁴⁾	-	○	
	Schedule	○	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Auto Control	Energy & Priority Control	-	○	○	○	○ ⁸⁾	○
Peak Control		-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
Outdoor Unit Capacity Control		-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
Time limit control		-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
Energy Navigation	Interlocking	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Power	-	○	○	○	○ ⁸⁾	○	
Energy Report	Gas	-	-	○	○	○ ⁸⁾	○	
	Run time	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Save to PC / USB (Excel)	-	-	PC / USB ⁸⁾	PC	PC	PC	
Trend Reporting	Save to PC / USB (Excel)	-	-	-	-	-	○	
	Report (Control / Error)	-	Error	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
History	Send Email	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	Save to PC / USB (Excel)	-	-	PC / USB ⁸⁾	PC ⁴⁾	○ ⁸⁾	PC ⁸⁾	
	Summer Time	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
etc.	Outdoor Unit Oil-Return Operation	-	-	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	-	
	User Authority	-	Password	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	
	PC Access	-	○	○ ⁴⁾	○ ⁴⁾	○ ⁸⁾	○	

○ : Applied, - : Not Applied
 1) The Commercial Air purifier must additionally install H-885 (HWP) (H-842)
 2) Save to PC / USB function will be available from 2021.
 3) Except for some feature (Individual lock, Limit temp., etc.)
 4) Except for some feature (User mode, additional function, etc.)
 5) This function is not applied for BMS points.
 6) Without additional device ACP 5 and AC Smart 5 provide BACnet/IP and Modbus TCP interface for BMS.
 7) ACP 5 or AC Smart 5 is required.
 8) Hard Lock.

AC EZ Touch

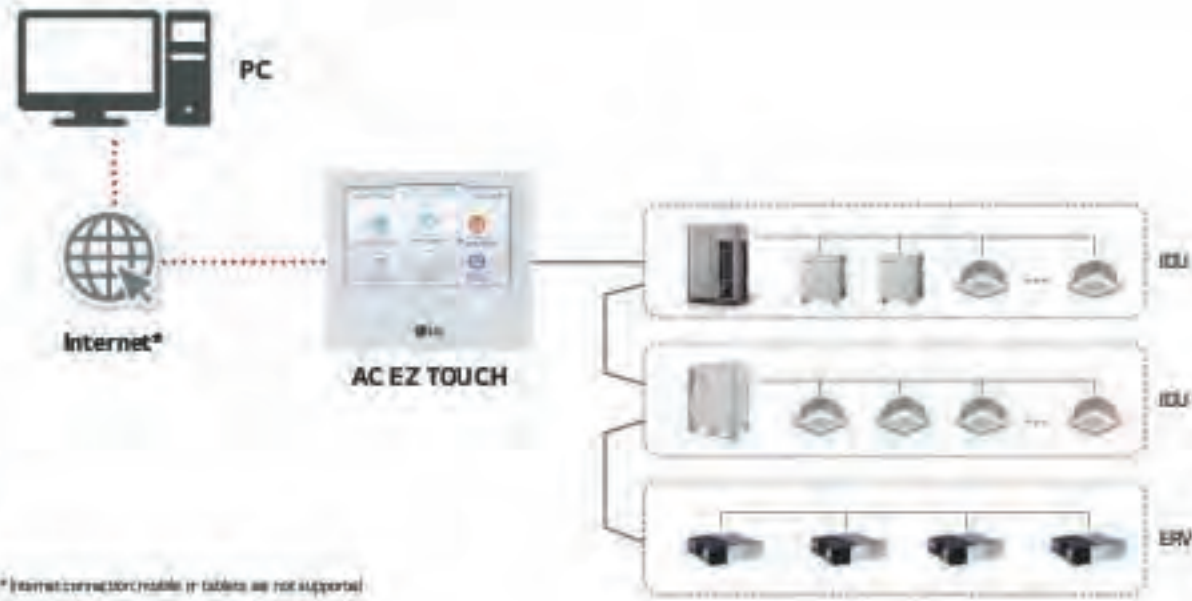

* Internet connection available in tablets are not supported

PACEZA000

Smart management with 5 inch touch screen for small site.



MODEL NAME	PACEZA000
Size (W x H x D, mm)	137 x 121 x 25
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro KIC / THERMA V
Maximum number of units	64
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Slave Mode (interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Remote Access	By client: S/W (Neither Android nor IOS are supported)
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation History	Error record
ODU Low Noise †	○
Daylight Saving Time	○
Bitmask ID Perm	0/1
PV6 Support	○
Air Purify Control	○
Air Quality Level	○

○ : Applied / - : Not Applied
 ○ : Not available in some products

PC Access

Users can control each space efficiently through PC access.



* Full supported
 - Open port 80 & 9300
 - Firewall & IP is mandatory. Router configuration of NAT is required.

Energy Statistics (with PDI)

Statistics of operational status (Time, Power consumption) are provided to help make intelligent system operation decisions.

Energy		2020.2.11 ~ 2020.3.13	Today	Week	Month
Name	Usage(kWh)	Accumulated(kWh)			
Group1	110	3021			
Group2	150	5186			
Group3	190	4267			
Group4	120	7614			

Energy Mode

When using energy mode function, operation Modes from cooling to fan or heating to off mode by force. (It is available only for operating indoor unit)




Air Purify Control & Monitoring



AC EZ Touch

Alarm Indicator

It shows errors and alarm information. Users can respond immediately according to alarm indicator therefore HVAC system is monitored consistently.

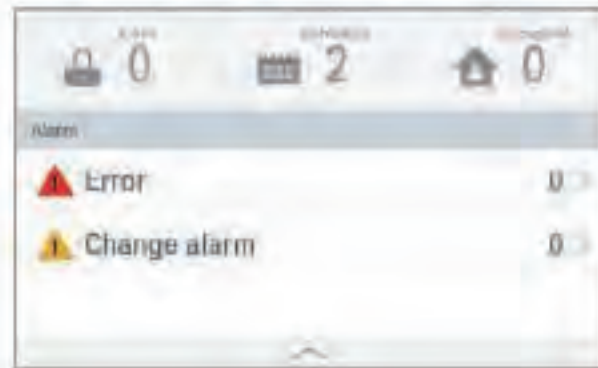

Schedule

Schedule control allows user to set the events in advance to maximize system performance. Also, by blocking unnecessary operation, it prevents a waste of energy.



Group / Individual Control

User can control each indoor unit individually or by group by simply clicking each unit on control screen.



AC EZ



• Appropriate PHRS should be used according to FE.

PQCSZ25050

Easy to manage up to 32 indoor units, including ERV with simple interface.




Features & Benefits

- 32 indoor units control
- Weekly Schedule
- Individual / Group Control

MODEL NAME	PQCSZ25050
Size (W x H x D, mm)	190 x 120 x 20
Interfaceable Products	MULTI V / ERV / ERV DK
Display	LED / LCD Display
Power	DC12V, 1A
Maximum number of units	32
Individual / Group Control	On / Off / Mode / Temperature / Fan speed
Individual Controller Lock	All
Error Check	○
Slave Mode (time locking with higher level controller)	○
Schedule	Weekly

W/O : Applied - / Not Applied

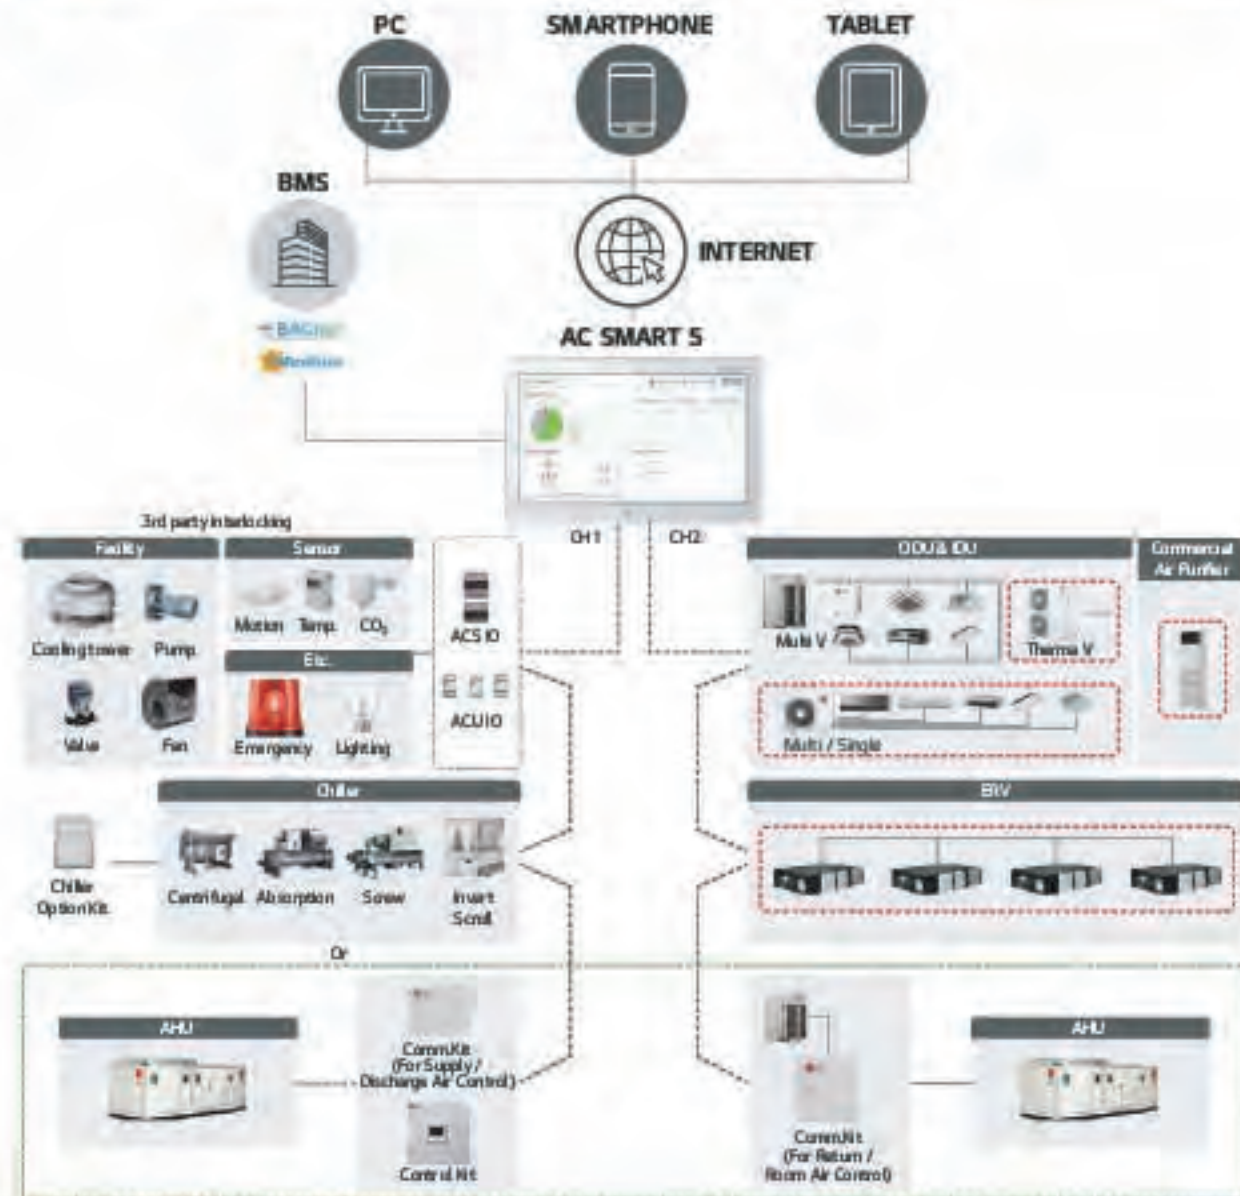

1) According to CH1 setting, normal ODU can be connected to CH1 (flexible wiring design with 2 ports)
 2) Appropriate P-ABS should be used according to PDB (Product Data Book)
 3) For details, refer to the product PDB or manual.

AC Smart 5

PACSSA000

10-inch touch screen with HTML5 GUI (Graphic User Interface) for easy control.



- Max. 128 IDU control
- Schedule
- Map view (Visual navigation)
- Energy monitoring
- Air Purify
- Multi-level grouping

MODEL NAME	PACSSA000
Size (W x H x D, mm)	253.2 x 187.7 x 28.9
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V / AHU Kit / LG CHiller 1) / Commercial Air Purifier
Maximum number of units	128
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display 2)	Comfort Cooling / ODU LowNoise / ODU Defrost Mode / Comfort Level display / CO2 Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Slave Mode (interlocking with higher level controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDB)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDB)	○
Daylight Saving Time	○
External IO Port	DI 2 / DO 2
BMS Integration 3)	BACnet IP / ModbusTCP
IPv6 Support	○

○: Applied, -: Not Applied
 1) Chiller Option Kit (PC/SLU/000) is required.
 2) It is only available in some products.
 3) For the detail points, please refer to the manual.

AC Smart 5

Air Purify Total Solution

Air Purify Control



Air Quality Level Monitoring



System Air Conditioner

Commercial Air Purifier



*The Commercial Air purifier must additionally use a P-802 (P-800P/M/A0)

Advanced Network Accessibility

AC Smart 5 reflects the state of the art of network technology trend. IPv6 (Internet Protocol version 6), which is the most recent version of the Internet Protocol provides accessibility to the IPv6 compatible network environment. In addition, HTML5 allows you to easily control LG HVAC system on a variety of platforms (PC, Mobile, Tablet), at any time and from any location, not just on the touch screen.



Visualized Control

Visual navigation enables controlling and monitoring the unit on floor, plan view for the intuitive management.



Multi Level Group Composition

User can make frequent and multi level group to control and monitor the device easily.



Energy Management

The energy navigation function allows the air conditioner's operational energy usage to be managed monthly, weekly and yearly. By analyzing present energy consumption and comparing with the plan, overuse of system operational costs can be prevented.




Building Management System (BMS) Integration

Without additional device, AC Smart 5 provides BACnet IP & Modbus TCP interface for BMS integration as well as its own management function.




Interlocking with 3rd Party Equipment

AC Smart 5 can make operation scenario with 3rd party equipment by ACS IO Module. Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches→)

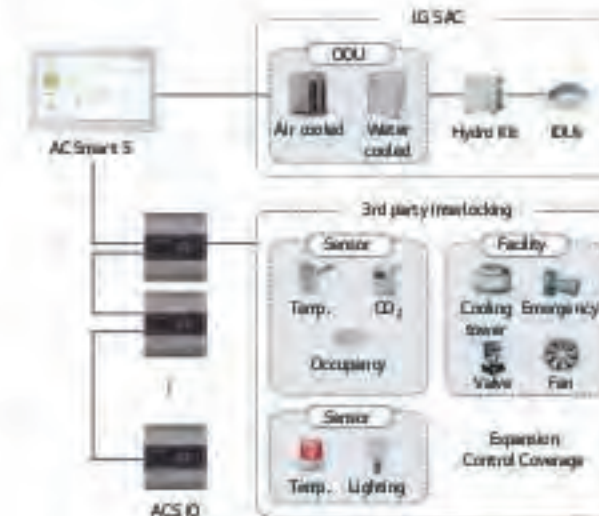

ACP 5

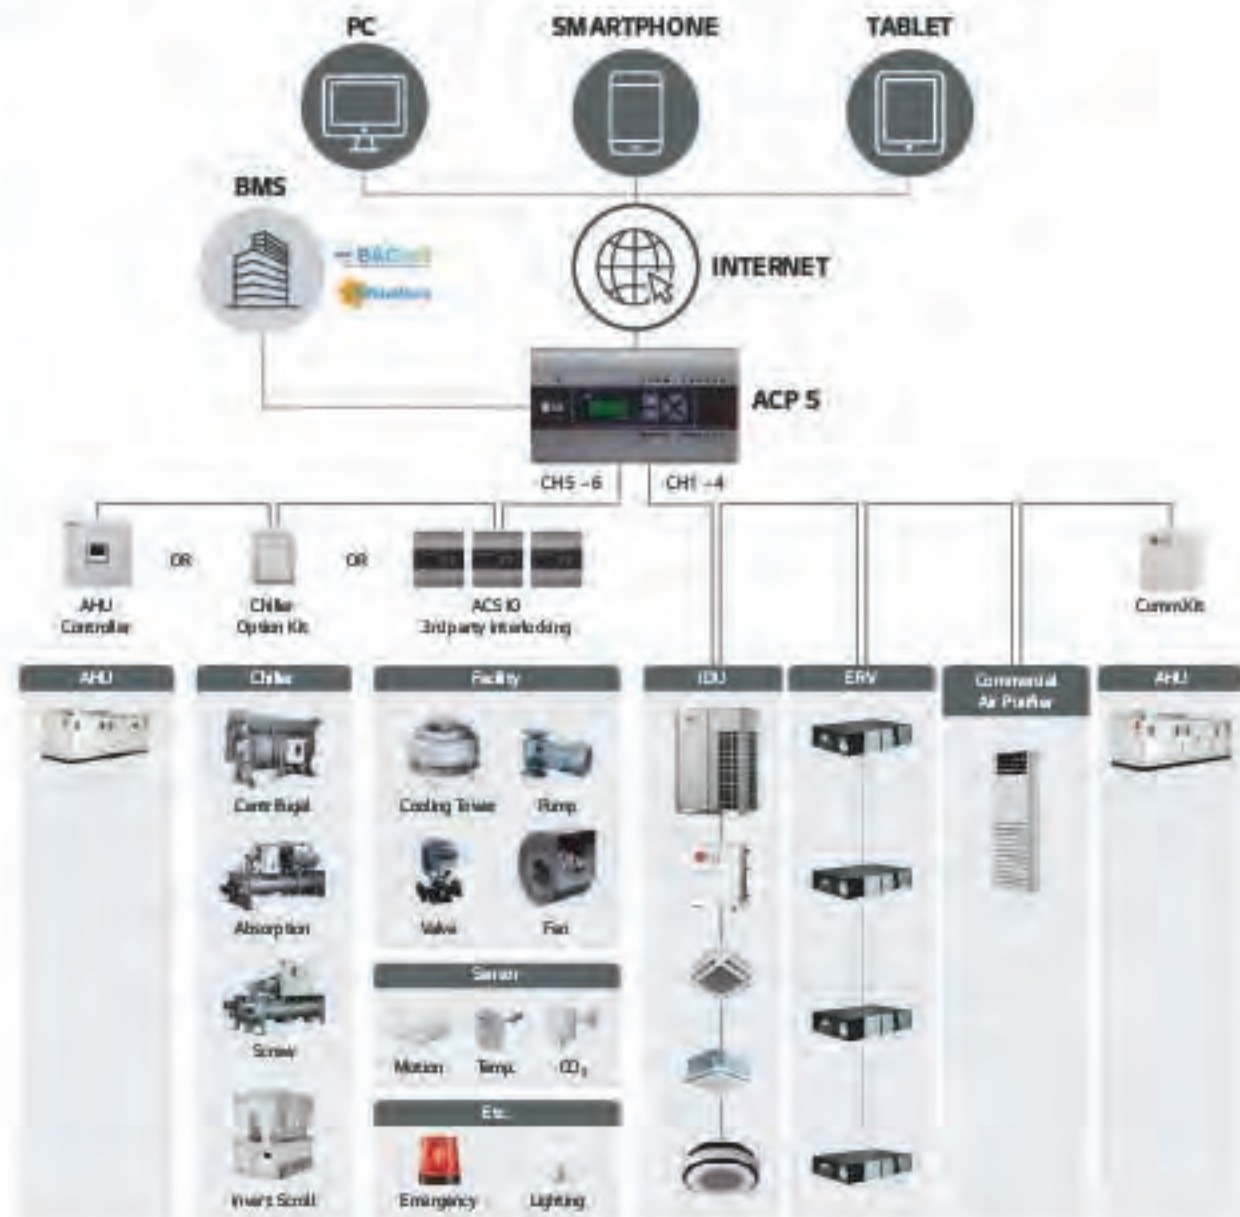

Advanced Network Accessibility



* IPv6 Public IP is mandatory
* Research Configuration of NAT is mandatory Clientport: 00 & 0:30:0

Energy Navigation



BACnet IP & Modbus TCP



PACP5A000

Advanced solution for BMS integration up to 256 units via BACnet and Modbus protocol as well as its own smart management function with web server interface.



MODEL NAME	PACP5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V / AHU Kit / LG Chiller 1 / Commercial Air Purifier
Maximum number of units	256
Individual / Group Control	On / Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display 2)	Comfort: Cooling / ODU LowNoise / ODU Defrost Mode / Comfort Level display / CO ₂ Level display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 10 / DO 4
BMS Integration 3)	BACnet IP / Modbus TCP
IPv6 Support	○

○: Applied, -: Not Applied
1) Chiller Option Kit (PCU&LM00) is required.
2) It is only available in some products.
3) For the detail point list, please refer to the installation manual.


Air Purify Control / Monitoring

Integrated Management

The Commercial Air Purifier can be used with LG central controller to monitor and control.



AC MANAGER 5

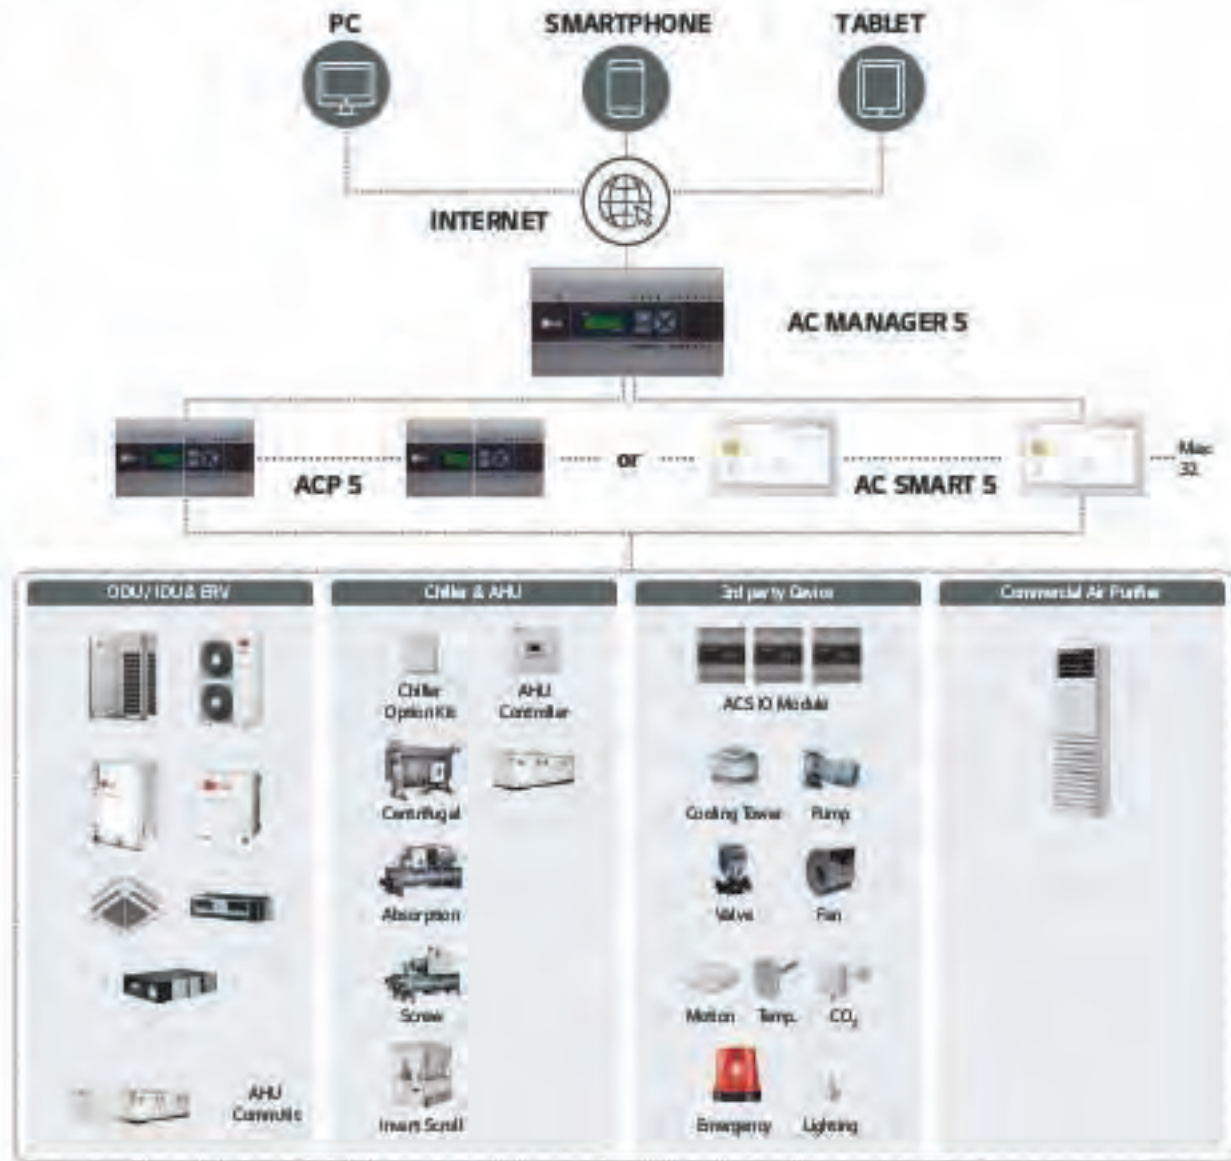

PACM5A000

Multiple ACP and AC Smart integration solution to manage multi sites up to 8,192 units as a single system.



MODEL NAME	PACM5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro kit / THERMA V / AHU ER / LG Chiller ¹⁾ / Commercial Air Purifier
Maximum number of units	8,192 (Supports 32 ACP 5 or AC Smart 5)
Individual / Group Control	On / Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception day
Web Access	○
Emergency Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○

W/O : Applied, - : Not Applied
 1) Chiller Option Kit (PO-ILLJ000) is required for ACP 5 or AC Smart 5.
 Note : AC Manager 5 required for ACP 5 or AC Smart 5.

Up to 8,192 Connections for Indoor Units

Administrators can easily and conveniently manage a variety of LG HVAC equipment. Also, it is available to manage many buildings or areas at one place via AC Manager 5.



AC MANAGER 5

Smart Air Purify Solution

Total management of air purify function creates clean environment everyday.

Air Quality Multi Status view



Air Quality Summary Widget



- Average Value
- View by Device (Name, Air Quality value, Status)

Air Purify Control



- Easy setting of Air Purify function (Set / Clear)

View Air Quality Trends



- Daily (per hour) period (30 days) shows trends
- Excel output / easy to manage

Advanced Network Accessibility & User Friendly GUI

As an advanced central controller, AC Manager 5 offers flexible interface for each user by assessing the device screen and automatically customizing the layout to provide the most optimized interface.



Energy Navigation & Energy Usage Graph

Energy navigation is the function to set the target usage amount to limit the monthly power consumption and to control so that the total accumulated power consumption does not exceed the target usage amount. It performs total of 7 control levels with the estimated / actual usage amount exceeding ratio compared to the monthly target usage amount. For the control method, there are indoor unit operation ratio, outdoor unit capacity control, and indoor unit operation control.



Peak Control

This function can reduce electricity use. There are two kinds of control logic. Energy saving effect by indoor unit operation rate control. Load management effect by outdoor unit capacity control.

Operation ratio (IDUs) Control



IDU Capacity Control



Multi Level Group Composition

User can make frequent and multi level group to control and monitor the device easily.



ACP LonWorks Gateway

PLNWK8000

LonWorks easily link LG Air conditioners and other existing building systems.
By including ACP control function, the controlling continues even when error occurs with BMS.




Features & Benefits

- Connect to use LonWorks protocol and LG Air conditioner protocol.
- Process ability (Max. connection) : Indoor unit: 64EA, AHU Control Kit; Max. 16EA
- Self installation verification using internet (Web Server Included)
- Diagnosis of communication status on LG Air conditioner network
- It offers a variety of functions as ACP which allows the customer to efficiently control various types of equipment from the customer's own integration.

CONTROL	MONITORING
On / Off Command	On / Off
Operation Mode Setting	Operation Mode
Lock	Lock
Temperature	Temperature
Fan Level	Fan Level
Fan Direction Auto	Fan Direction Auto
Mode Lock	Mode Lock
Fan Level Lock	Fan Level Lock
Temperature Lock	Temperature Lock
Temperature Lower Limit	Temperature Lower Limit
Temperature Higher Limit	Temperature Higher Limit
Peak Convert Cycle	Peak Convert Cycle
Peak Setting	Peak Setting
Temperature Unit	Temperature Unit
Total Temperature Lock	-
Total On / Off	-
Total Temperature	-
-	Product Type
-	Product Address
-	Current Temperature
-	Alarm
-	Power
-	Error Code
-	Peak Current Operating Percent
-	Total AC cumulative Power

①: Applied / -: Not Applied

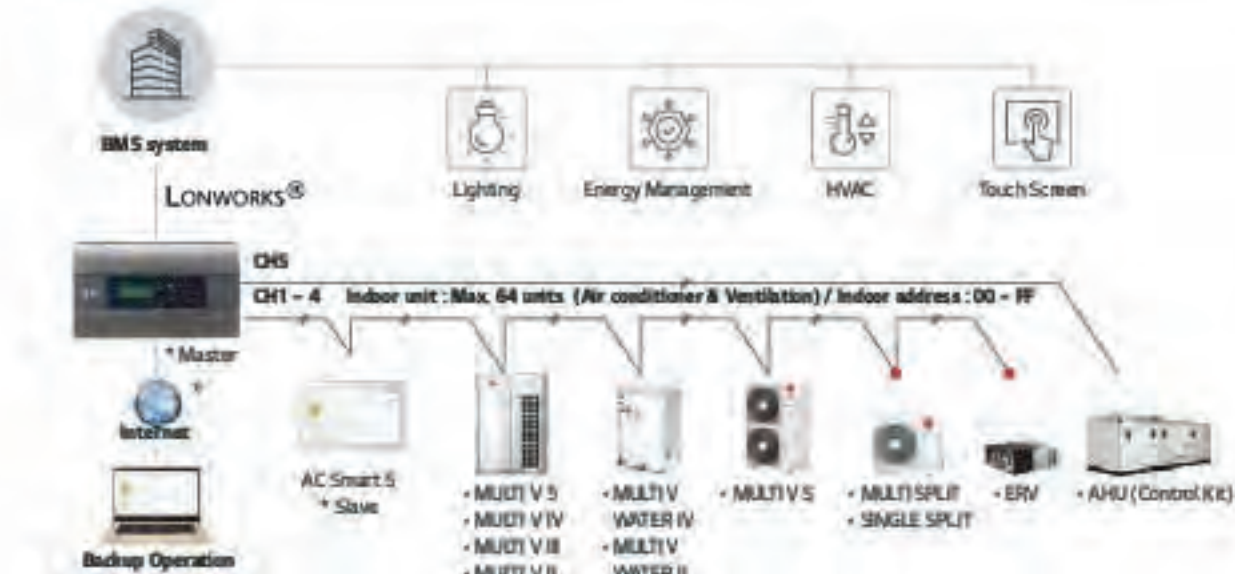

*) Assignment of public IP address is required to access control center through internet. * Appropriate PAB should be used according to POI (Product Data Book).

PI485

PI485 converts LG Air conditioners protocol to the RS485 protocol for the central controller.

PMNFP14A1

Easy to manage up to 64 indoor units, including ERV with simple interface.



- Power: Single phase AC 220V 50 / 60Hz
- 1 for Each Outdoor Unit
- Multi V MINI (ARUN40GS2A / ARUN40GS2A, Only needs PI485)
- Single Split
- Multi Split
- Thermo V

PHNFP14A0



- Power: Connected with the Indoor Units
- 1 for Each Indoor Unit
- Indoor Unit (ERV)

MODBUS RTU Gateway

PMBUS00A

Providing Modbus RTU connection between LG Air conditioners and BMS.



Features & Benefits

- Function
 - Modbus RTU communication with Modbus master controller
 - Modbus RTU slave (RS485) / 9,600 bps
 - Applicable for MUE3 V 5, ERV, Heating
 - Size (W x H x D, mm) : 53.6 x 89.7 x 60.7
 - Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules
 - Power : DC 12V
 - No slave allowed in LGAP

Installation Scene


Single Module

Max. 16 indoor units with a single module



Multiple Module

Max. 64 indoor units with 4 modules in one Modbus communication line

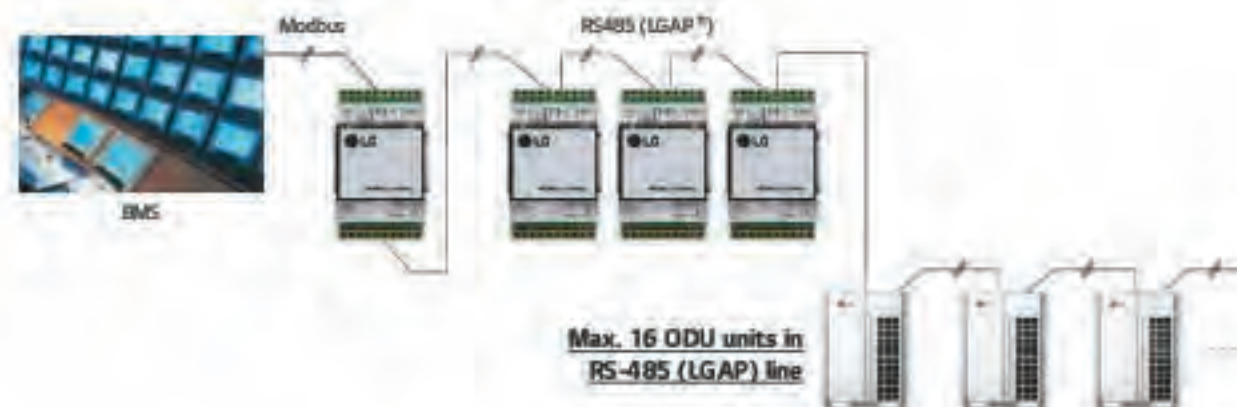

1) LGAP is LG Patent.
Max. 16 IDU units in RS-485

Modbus Gateway Memory Map

Baud Rate : 9,600 bps, Stop Bit : 1 stop bit, Parity : None Parity, Byte size : 8 bits

Coil Register (0 x 01)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Operate (On / Off)	Operate (On / Off)	Operate (On / Off)	0 : Stop / 1 : Run	Register = NX 16 + ID (N = Indoor Unit Central Address)
2	Auto Swing	Auto Operate (On / Off)	Hot Water Mode (On / Off)	0 : Disable / 1 : Enable	
3	Filter Alarm Release	Filter Alarm Release 1	Reserved	0 : Normal / 1 : Alarm Release	
4	Lock Remote Controller	Lock Remote Controller	Lock Remote Controller	0 : Unlock / 1 : Lock	
5	Lock Operate Mode	Lock Operate Mode 1	Reserved	0 : Unlock / 1 : Lock	
6	Lock Fan Speed	Lock Fan Speed 1	Reserved	0 : Unlock / 1 : Lock	
7	Lock Target Temp.	Lock Target Temp 1	Reserved	0 : Unlock / 1 : Lock	
8	Lock IDU Address	Lock IDU Address 1	Reserved	0 : Unlock / 1 : Lock	
9	Reserved	Quick Ventilate	Reserved	0 : Disable / 1 : Enable	
10	Reserved	Energy Save	Reserved	0 : Disable / 1 : Enable	

1) This register value is applied DX Ventilate ONLY

Discrete Register (0 x 02)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Connected IDU	Connected IDU	Connected IDU	0 : Disconnected / 1 : Connected	Register = NX 16 + ID (N = Indoor Unit Central Address)
2	Alarm	Alarm	Alarm	0 : Normal / 1 : Alarm	
3	Filter Alarm	Filter Alarm 1)	Hot Water Only 1)	0 : Normal / 1 : Alarm Hydro Kit 0 : Normal / 1 : Hot Water Only	
4	Reserved	Reserved	Target Temp. Select	0 : Air / 1 : Water	
5	Reserved	Reserved	Error Division 2)	0 : CH type error / 1 : BC type error	

1) This register value is applied DX Ventilate ONLY

2) This register value is applied Hydro Kit ONLY

Holding Register (0 x 03)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Operate Mode	Operate Mode	Operate Mode	0 : Cooling 1: Dehumidifying 2: Fan, 3: Auto, 4: Heating Hydro Kit (Middle Temp. DHW) / AWHF 0 : Cooling 3: Auto, 4: Heating Hydro Kit (High Temp. DHW)	Register = NX 20 + ID (N = Indoor Unit Central Address)
2	Fan Speed	Fan Speed	Target Temp. DHW 1)	1 : Low 2 : Mid 3 : High 4 : Auto	
3	Target Temp.	Target Temp. 1)	Target Temp. 2)	16.0 - 30.0 [°C] x 10	
4	Target Temp. Limit (Upper)	Target Temp. Limit 1) (Upper)	Reserved	16.0 - 30.0 [°C] x 10	
5	Target Temp. Limit (Lower)	Target Temp. Limit 1) (Lower)	Reserved	16.0 - 30.0 [°C] x 10	
6	Reserved	Multi Operate Mode	Reserved	0 : HEV, 1 : Auto, 2 : Normal	

1) This register value is applied DX Ventilate ONLY

2) This value ranges from between 0 - 1.27 [°C], and it would be limited by upper & lower value according to the setting of remote controller



Input Register (0 x 04)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Error Code	Error Code	Error Code	0 - 255 * Please refer to the product error table	Register = NX 20 + ID (N = Indoor Unit Central Address)
2	Room Temp.	RA Temp.	Room Temp.	-99.0 - 99.0 [°C] x 10	
3	Pipe In Temp.	OA Temp. 1)	Water Inlet Temp.	-99.0 - 99.0 [°C] x 10	
4	Pipe Out Temp.	SA Temp. 1)	Water Outlet Temp.	-99.0 - 99.0 [°C] x 10	
5	Reserved	Pipe In Temp. 1)	Sanitary Tank Temp.	-99.0 - 99.0 [°C] x 10	
6	Reserved	Pipe Out Temp. 1)	Solar Temp. 2)	-99.0 - 99.0 [°C] x 10	

1) This register value is applied DX Ventilate ONLY

2) This register value is applied AWHF ONLY




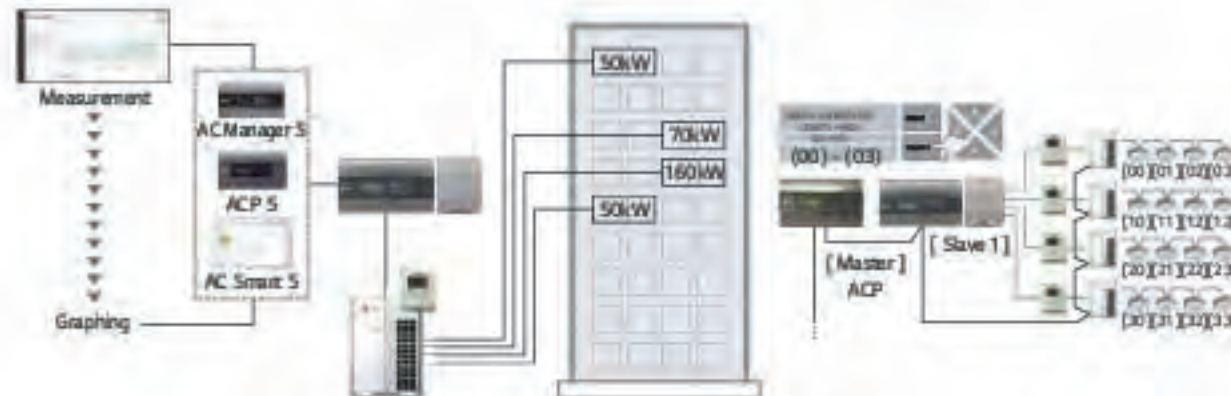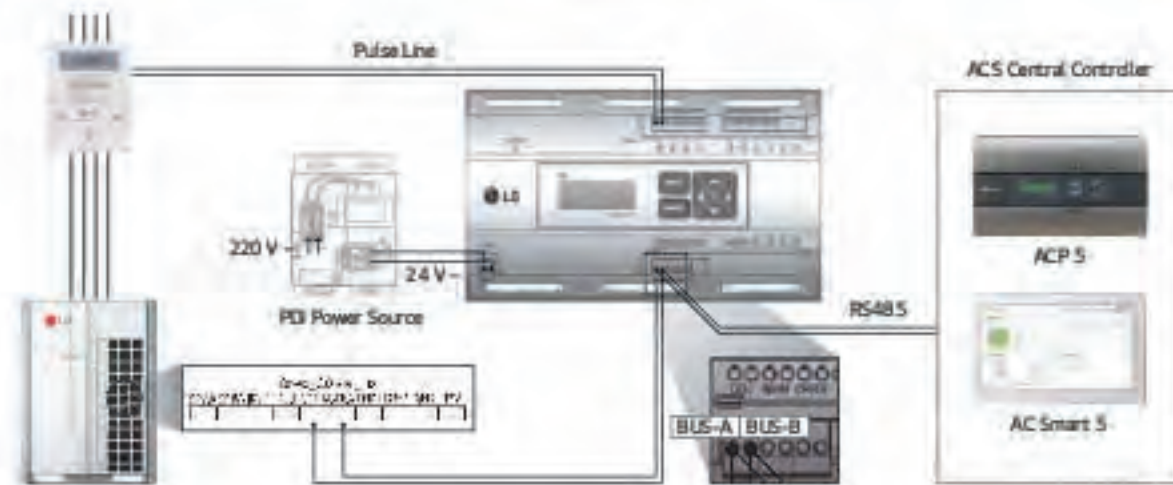

Note:
 1. Power cable and type could be different from this one depending on the Outdoor unit's specification.
 2. Measured power consumption could be different between PDI and Watt meter.
 3. Applicable Central Controller (ACP 5, ACP Low Noise, AC Smart 5, AC Ez Touch Combination). We recommend to connect separate watt meter for Outdoor units to have correct power distribution value.

PDI (Power Distribution Indicator)

PQNUD1540 (Premium, 8 ports) / PPWRDB000 (Standard, 2 ports)
 PDI shows distributed power consumption of up to 128 indoor units.

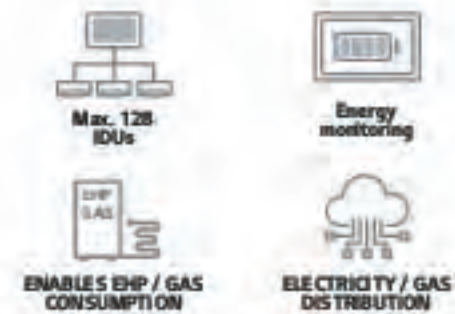


Features & Benefits

- Enables total and indoor power consumption monitoring
- With LG central control connectivity, energy monitoring, energy savings operations and target usage setting functions are enabled
- Enables gas consumption and electricity distribution.

MODEL NAME	PQNUD1540	PPWRDB000
Size (W x H x D, mm)	270 x 155 x 65	
Interfaceable Products	Air conditioner, ERV, DK	
Maximum Number of Power Meters	EHP: 8 Watt meter GHP: 4 Watt meter / 4 Gas meter	EHP: 2 Watt meter GHP: 1 Watt meter / 1 Gas meter
Maximum Number of Indoor Units	Multi V: 128	
Data Backup When Power Outage	○	
Power Input	PDI: AC 24V Transformer / AC 220V	

○ : Applied / - : Not Applied

ACS IO Module

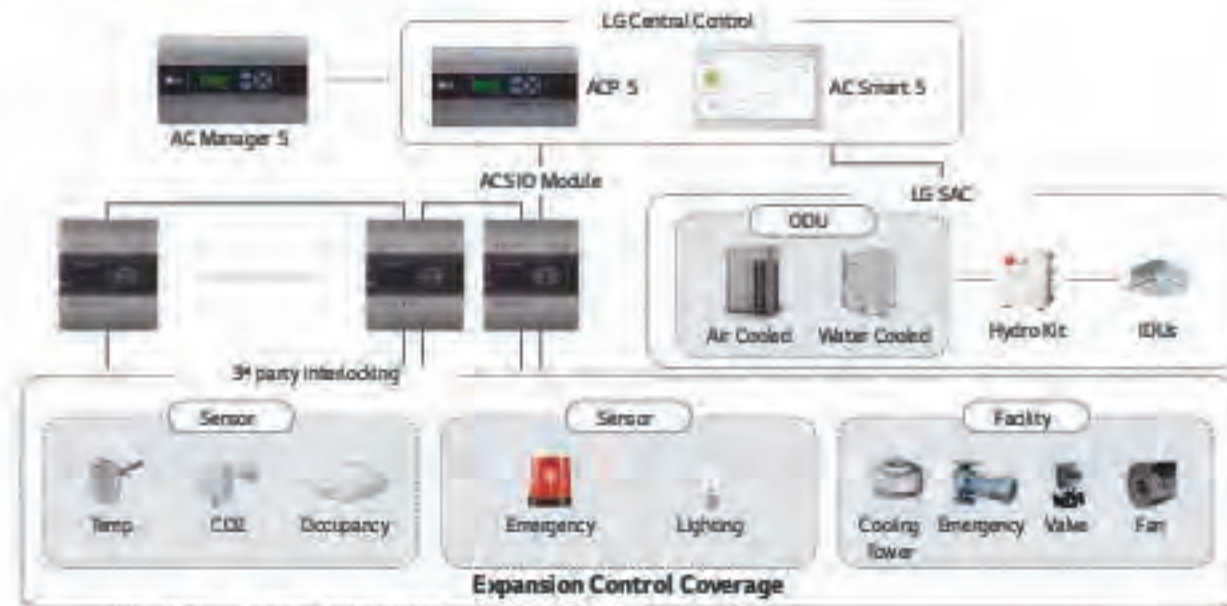

DI: Digital Input, DO: Digital Output, UI: Universal Input, AO: Analog Output.


Case 1

Parking Lot Ventilation
Turning on ventilator when CO₂ level is high



Case 1

Auxiliary Heater
Turning on aux. heater when outside temp. is very low

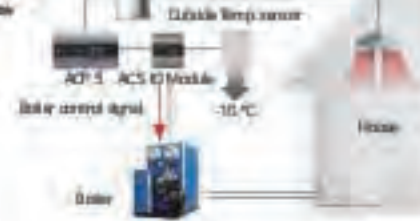

PEXPMB000

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as DI / DO and AI / AO for 3rd party devices control and monitoring are needed.



Features & Benefits

- Interlocking with 3rd party equipment, LG Central controller can make operation scenario with 3rd party equipment by ACS IO Module.
- Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches →)


MODEL NAME		PEXPMB000	
Linkable Products		PACSSA000, PACPSA000	
Communication	RS-485	1 ch	
I/O	Digital Input	3 ports	
	Digital Output	3 ports	
	Universal Input ¹⁾	4 ports	
	Analog Output	4 ports	
VALUE SPEC		MIN.	MAX.
Analog Input	NTC 10k	0.68kΩ	177kΩ
	PT 1000	803Ω	1,573Ω
	NI 1000	871.7Ω	1,875.2Ω
Analog Output	DC (Voltage)	0V	10V
	DC (Current)	0mA	20mA
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal open	-	30VAC / 30VDC 2A

①: Applied, -: Not Applied
¹⁾The type of UI (Universal Input) is selectable among Digital Input and Analog Input.
 Note: ACS IO & ACS IO are not a replacement for Direct Digital Controller (DDC) or PLC.

ACU IO Module

PEXPMB300, PEXPMB200, PEXPMB100

This module can be connected with ACP 5 or AC Smart 5 controller if additional I/O points such as UIO / UI / UO for 3rd party devices control and monitoring are needed.

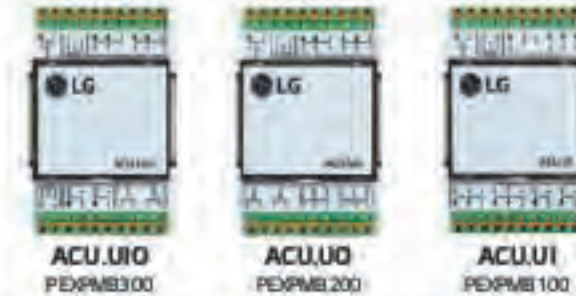

Features & Benefits

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACU IO Module.
- Applicable devices are expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches →)

MODULE NAME	PEXPMB300	PEXPMB200	PEXPMB100
Linkable Products	PACSSA000, PACPSA000		
Communication RS-485	1 ch	1 ch	1 ch
Digital Input	-	-	3 ports
Digital Output	2 ports	5 ports	-
Universal Input ¹⁾	4 ports	-	6 ports
Analog Output	2 ports	4 ports	-

VALUE SPEC		MIN.	MAX.
Analog Input	DC (Voltage)	0V	10V
Analog Output	DC (Voltage)	0V	10V
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal Open	-	30VDC, 1A

①: Applied, -: Not Applied
¹⁾The type of UI (Universal Input) is selectable among Digital Input and Analog Input.

Chiller Option Kit

PCHLLN000

LG central controller 5 series with Chiller Option Kit can provide LG chiller remote control and cycle monitoring.



MODEL NAME	PCHLLN000
Monitoring Points	Evaporator status / Compressor status (Scroll / Screw / Centrifugal chiller only) / Condenser status / Generator status (Abs. chiller only)
On / Off	○
Target Temp. setting	○
Mode	Scroll chiller only
Schedule	○
Interfacable Products	Scroll, Screw, Centrifugal, Absorption (LG Only)

①: Applied, -: Not Applied

Installation Scene

- Chiller Option Kit installation of ACP, AC Smart should be conducted by a specialized installation service engineer.
- Chiller Option Kit installation can be achieved with a SD Card.
- The SD Card can install Chiller Option Kit in one ACP, AC Smart. Insert the SD Card in the ACP, AC Smart. If a backup SD Card is inserted, replace it with a Chiller Option Kit SD Card.




Cycle Display Example



DRY CONTACT

PDRYCB000

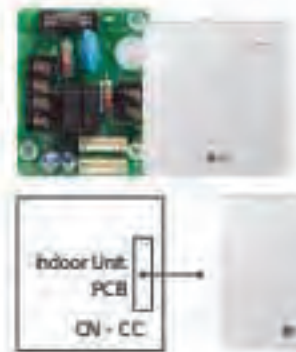

Simple Dry Contact (1 input)




PDRYCB400



Dry Contact for 2 Input



PDRYCB320




Dry Contact for Thermostat



※ Please contact our regional office to know full compatible room controller list.

PDRYCB500

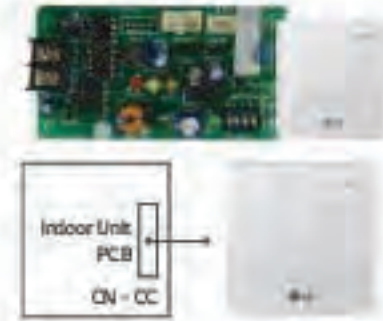

Dry Contact for Modbus



※ Please contact our regional office to check the compatibility with 3rd party room controller.

Specification

Connection between an indoor unit and external devices to control various functions.

MODEL NAME	PDRYCB000	PDRYCB400	PDRYCB320	PDRYCB500
Case				
Input Port	1	2	8	-
Universal Input port	-	-	1	-
Comm. Protocol	-	-	-	ModbusRTU
Power	AC 220V	Connect to Indoor unit PCB (CN-CC) : DC 12V		
IDU	On / Off	○	○	○
	Operation Mode	-	○	○
	Set Temp.	-	(Select & Fix)	(Select & Fix)
	Fan Speed	-	-	○
	Thermo-Off	-	(Select & Fix)	○
	Energy Saving	-	(Select & Fix)	-
	Lock / Unlock	-	(Select & Fix)	-
	On / Off	○	-	○
	DHW On / Off	-	-	○
	Thermo-Off	-	-	○
Heating	Operation Mode	-	○	-
	Silent Mode	-	-	-
	Emergency Mode	-	-	○
	On / Off	○	-	○
	Operation Mode	-	-	○
ERV	Aircon Mode	-	-	○
	Additional Mode	-	-	○
	Fan Speed	-	-	○
	Operation Status	○	○	○
Output	Error	○	○	○
	Room Temp.	-	-	○

○ : Applied - : Not Applied

Note

- Compatibility of PDRYCB320
 - Can use with all types of series indoor units after 2010 (Ceiling Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can use with new single package AH-W model after 2020.10 (The previous version Single package is not compatible)
- Heating: 3 series AWH Hybrid and Monoclic models & generation Hybrid kit

2. Compatibility of PDRYCB400

- Can use with all types of air conditioner indoor units after 2010 (Casette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
- Can use with new single package AH-W model after 2020.11 (The previous version Single package is not compatible)
- Can not use with AWH Hybrid kit models.
- 3. (Select & Fix) This function is preset by rotary switch.


Group Control Wire

PZCWRG3



MODEL NAME	PZCWRG3
Y-type Cable	0.25m Length
Long Cable	9.5m Length

Installation Scene

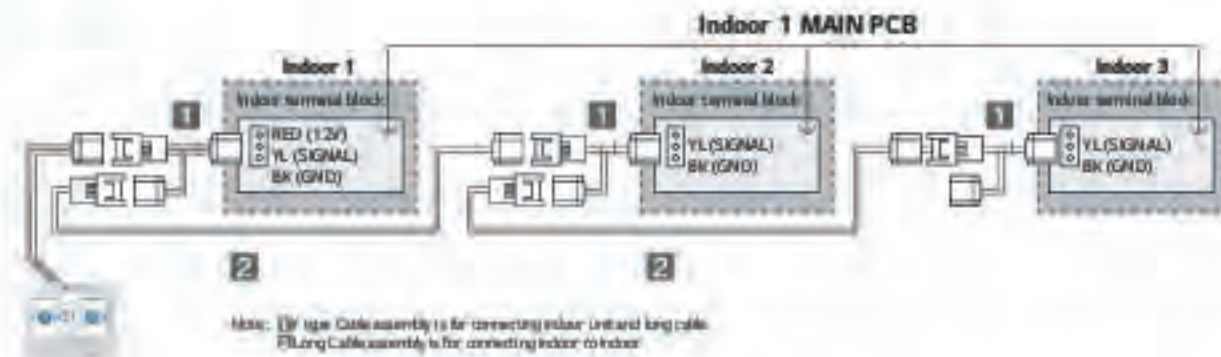

Remote Temperature Sensor

PQRSTA0

Sensor for detecting the room temperature.




Features & Benefits

- It detects the exact room temperature instead of indoor unit's air temperature sensor.
- Applied to Ceiling Mounted Cassette, Ceiling Concealed Duct, THERMA V and Hydro Kit.
- Extension cable (15m) is included.

Installation Scene

1. Wire to the control box in the indoor unit by removing the existing thermistor and connect the extension cable its place.
2. Cut the extension cable to the appropriate length and connect the screw terminal of the remote sensor.

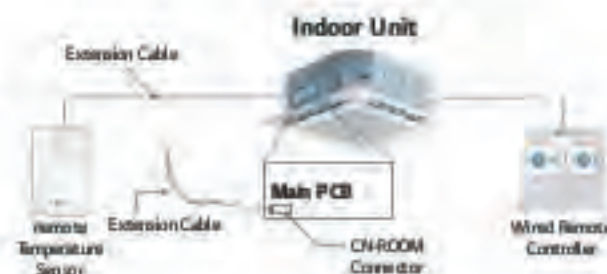

Zone Controller

ABZCA


Controls air conditioning in up to 4 zones by external thermostat.



Features & Benefits

- Controls different zones (up to 4 zones) by external thermostat (AC 24V).
- Maintain proper air volume of each zone.
- Auto variation of dampers.
- Auto control of fan speed and On / Off operation.

Installation Scene

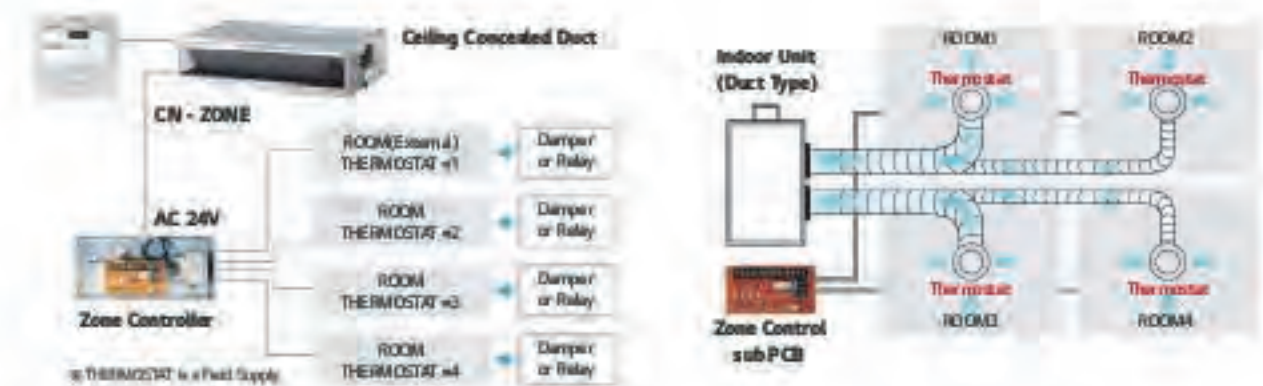

IO Module

PVDSMN000

Interface module between the outdoor unit of system air conditioner and the external device.



Features & Benefits

- Function
- Demand control
 - Low noise operation
 - Output outdoor or indoor unit operation status
 - Output error status

Description


- IO Module is communication interface module for connection between MULTI V S and external IO Input / Output Module devices.

Models Applied

- MULTI V N, S
 - MULTI V WATER IV
 - MULTI V S
- Note: IO Module is not compatible for Multi V B and Multi V SR32.

Part Description


- 1) Digital Input Part (DI : Dry Contact Input)
 - Demand control by contact input (3 Step)
 - Low Noise Operation Input
 - Priority Setting Input: Setting the priority of demand control command (Capacity control for external signal from DOC vs Peak control by LG Central controller)
 - Open: External signal has priority to central controller (Default)
 - Close: Central controller has priority to external signal
- 2) Analog Input Part (AI : DC 0 ~ 10V)
 - Demand control by analog input (10 Step)
- 3) Digital Output Part (DO : AC 250V, Max. 1A)
 - Error status relay output
 - Operation status relay output
 - Valve control

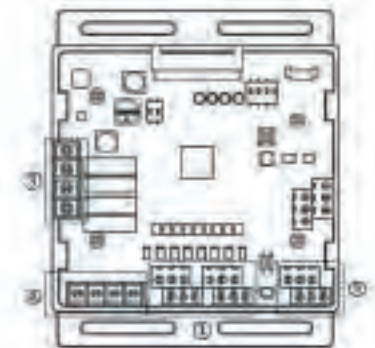

IO Module

ODU Capacity Control

Provides variable settings for ODU Capacity Control according to input method to reduce the power consumption. IO Module supports 2 types of input signal: Analog inputs (0-10V, 10 steps) and contact signals (3 steps)

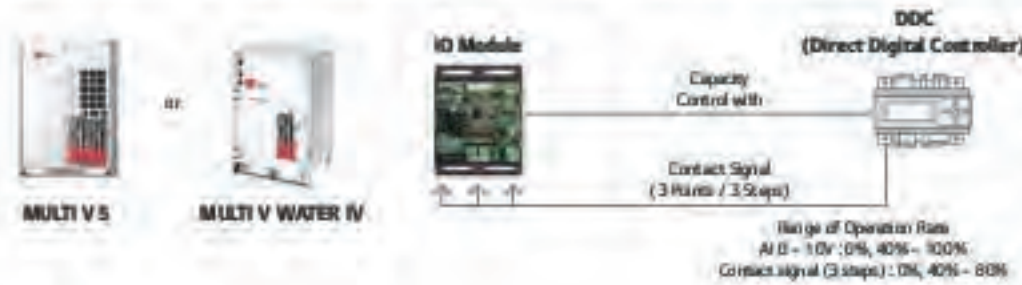

Low Noise Operation

To reduce noise level, control outdoor unit's fan speed by dry contact input.



※ If IP (22.8kW) model, Direct power level can be changed by outdoor unit operation status and indoor operation type signal.

Refrigerant Leakage Detection with Pump-down

For safety, IO module closes refrigerant valve during Pump-down operation.



※ If the concentration of the refrigerant in the air exceeds 6,000 ppm more than 3 seconds, this function will be activated. (Pelle's cooperation sequence will refer to in sec. T-05)

Variable Water Flow Control Kit

PWFCKN000 (MULTI V WATER IV)

Accessory for controlling the water flow



Features

Function


- Water pump or valve control (0-10V)
- Minimum output voltage setting available
- Operation error output (AC 250V, Max. 1A)
- Dry contact input and analog output for demand control
- Digital output for operation, error status (AC 250V, Max. 1A)

Description

- Water flow consumption reduction
- Pump electricity consumption reduction
- Including IO Module (Dry contact input, Analog input / output, Digital output)
- Using Dry contact and variable water flow control function simultaneously

Installation Scene

- Flow Control Valve: Regulates the flow or pressure of a fluid, normally responding to signals generated by independent devices.
- Flow Meter: Measures mass flow rate of a fluid traveling through a tube. (The mass flow rate is the mass of the fluid traveling past a fixed point per unit time.)
- Pressure Sensor: Measures the pressure.

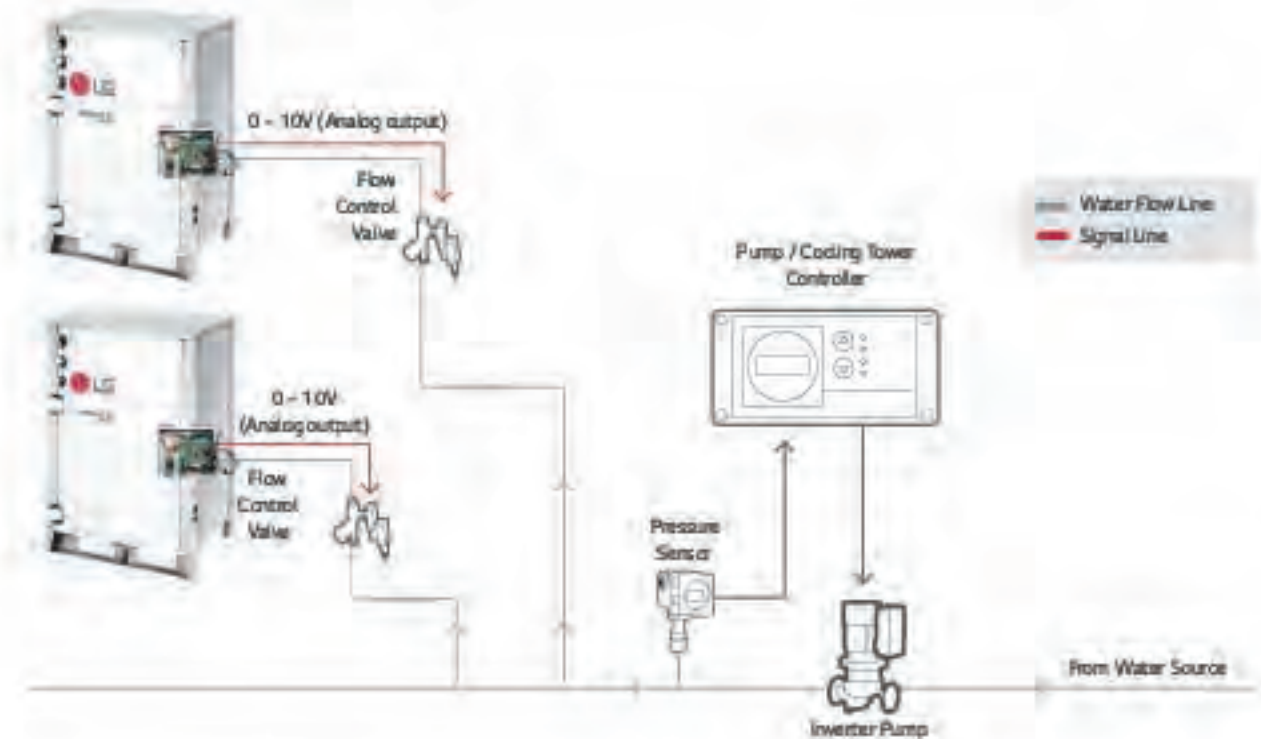

Low Ambient Kit

PRVC2

External integration module for cooling operation with -25 °C low ambient temperature.



Features

Function

- 25 °C Low ambient cooling operation by Low ambient kit and hood with damper (Analog output 0 ~ 10V)
- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status (AC 250V Max. 1A)
- Output error status (AC 250V, Max. 1A)


Description

- Low ambient kit supports -25 °C cooling operation by making stable condensing pressure with reducing air flow rate from hood and damper control given 0 ~ 10V proportional to condensing pressure.
- Low ambient kit provides IO Module function.
- External snow hood and air damper are required for this item.
- Transformer and terminal block are included.

Models Applied

- MULTI V 5

Installation Scene

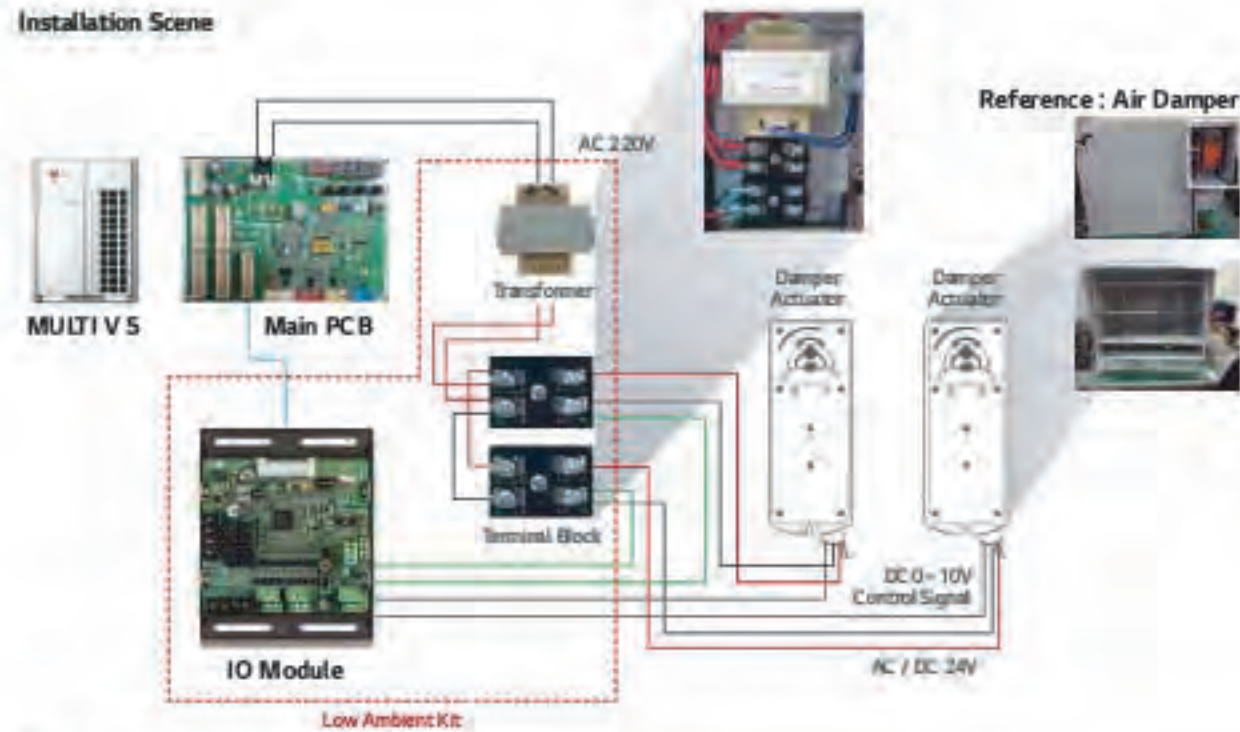

- Note**
- Damper Actuator can accept only DC 24V power input.
 - Do not input AC power. Otherwise, it will cause a serious damage.
 - The IO Module can control maximum three actuators.
 - Case of low voltage, the above signal connector must use.
 - The power (AC / DC 24V) and signal (DC 0 ~ 10V) line is recommended by AWG22 (1/32 in) (0.64 mm) 0075 Ω / ft (0033 Ω / m).

Cool / Heat Selector

PROSBM

Cooling only, heating only, and fan mode can be selected.



Features


- Indoor unit mode control without central controller
- Select operation mode : Cooling, Heating, Fan mode
- Mode lock for cooling & heating mixing error-proof during the change of season.

Models Applied

- MULTI V 5
- MULTI V W
- MULTI V WATER S
- MULTI V WATER II
- MULTI V S
- MULTI V PLUS II, MULTI V PLUS
- MULTI V WATER IV



Installation Scene

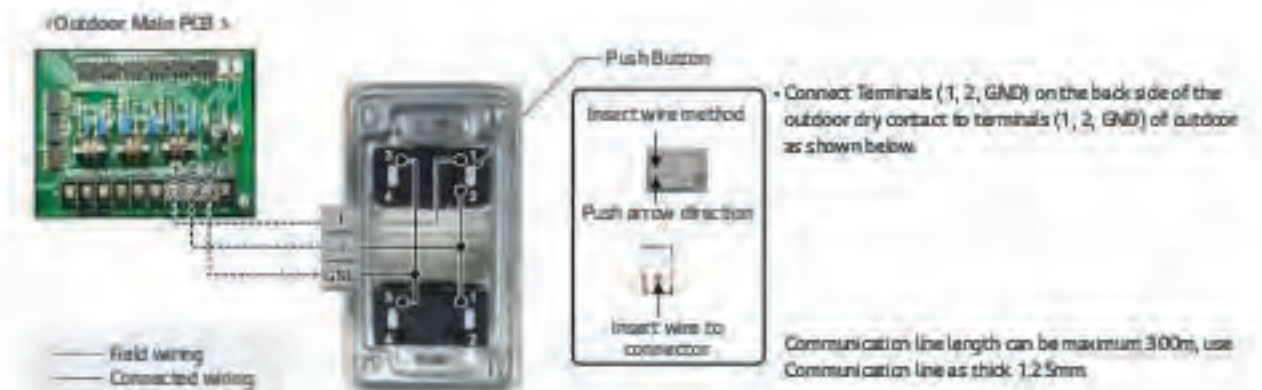

AHU Kit

A solution to connect LG's high efficiency system to the DX coil of an air handling unit for maximum energy savings.

COMMUNICATION KIT



CONTROLLER MODULE



CONTROL KIT



EEV KIT



Specification

Control Application Kit

TYPE	MODEL	DIMENSIONS (MM)			POWER SUPPLY	IP RATING	DESCRIPTION
		W	H	D			
Communication Kit	PAHCMR000	300	300	155	10, 220 ~ 240 V 50 / 60 Hz	IP66	Return / Room air temperature control by DDC or LG individual / centralized controller.
	PAHCMS000	380	300	155	10, 220 ~ 240 V 50 / 60 Hz	IP66	Discharge air / Supply air temperature control by DDC or LG individual / centralized controller.
Controller Module	PAHCM000	162	90	81	DC 12V	IP20	Main Controller module
	PAHCMC000	108	90	81	DC 12V	IP20	Communication Controller module
Control Kit	PAHCNM000	500	500	210	10, 220 ~ 240 V 50 / 60 Hz		Various AHU control functions with multiple DX coils (Maximum connectable ODU is 3 units)

Expansion Application Kit

TYPE	MODEL	DIMENSIONS (MM)			PIPE DIAMETER (MM)		CAPACITY INDEX RANGE
		W	H	D	LIQUID		
EEV Kit	PRLK048A0	217	404	83	127		3.6 ~ 28 kW
	PRLK096A0	217	404	83	127		28.1 ~ 56 kW
	PRLK396A0	349.5	345.5	180	19.05		56.1 ~ 112 kW
	PRLK594A0	409.5	345.5	180	19.05		112.1 ~ 168 kW

Communication Kit

High Energy Efficiency

LG's DX AHU solution's superior performance provides a highly efficient heat source system.

- High energy efficiency inverter system
- Large range of expansion application (Kit: Max. 168 kW EEV Kit 1)
- Connected to various heat sources: MULTI V, MULTI V WATER, MULTI V S, SINGLE SPLIT

1) Maximum connectable EEV capacity for PAHCMR000, PAHCMC000 is 112 kW




Diverse Options for Control

AHU communication kit can be connected to various control systems such as LG individual / central controller and DDC.¹⁾

It can be directly connected to DDC without separated controller, so DDC can receive product control and monitor information through contact signal or Modbus protocol.

- LG individual / Central controller supported
- LG controller stand alone or combination with DDC
- Direct wiring between DDC and AHU communication kit
- Embedded Digital I / O and Analog Input
- Modbus RTU protocol supported

1) DDC: Direct Digital Controller

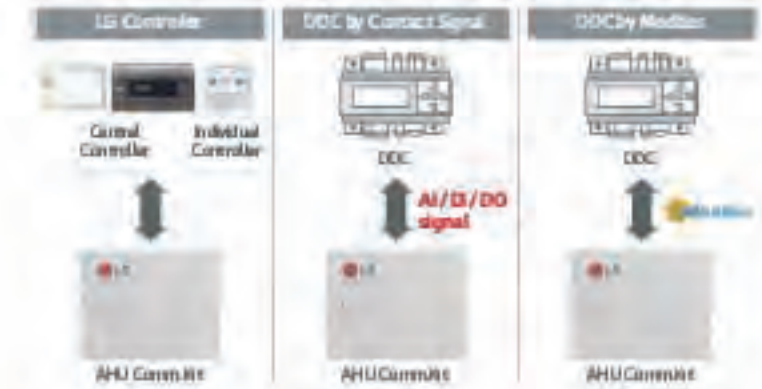


AHU Kit

Communication Kit

Expandable System Design

LG AHU system can be a suitable solution for various sites due to its application flexibility and wide range of line up with large capacity models. According to the required capacity, a single or multiple module combination is possible due to the AHU communication kit's modular design.


- Multiple module combination for large capacity AHU

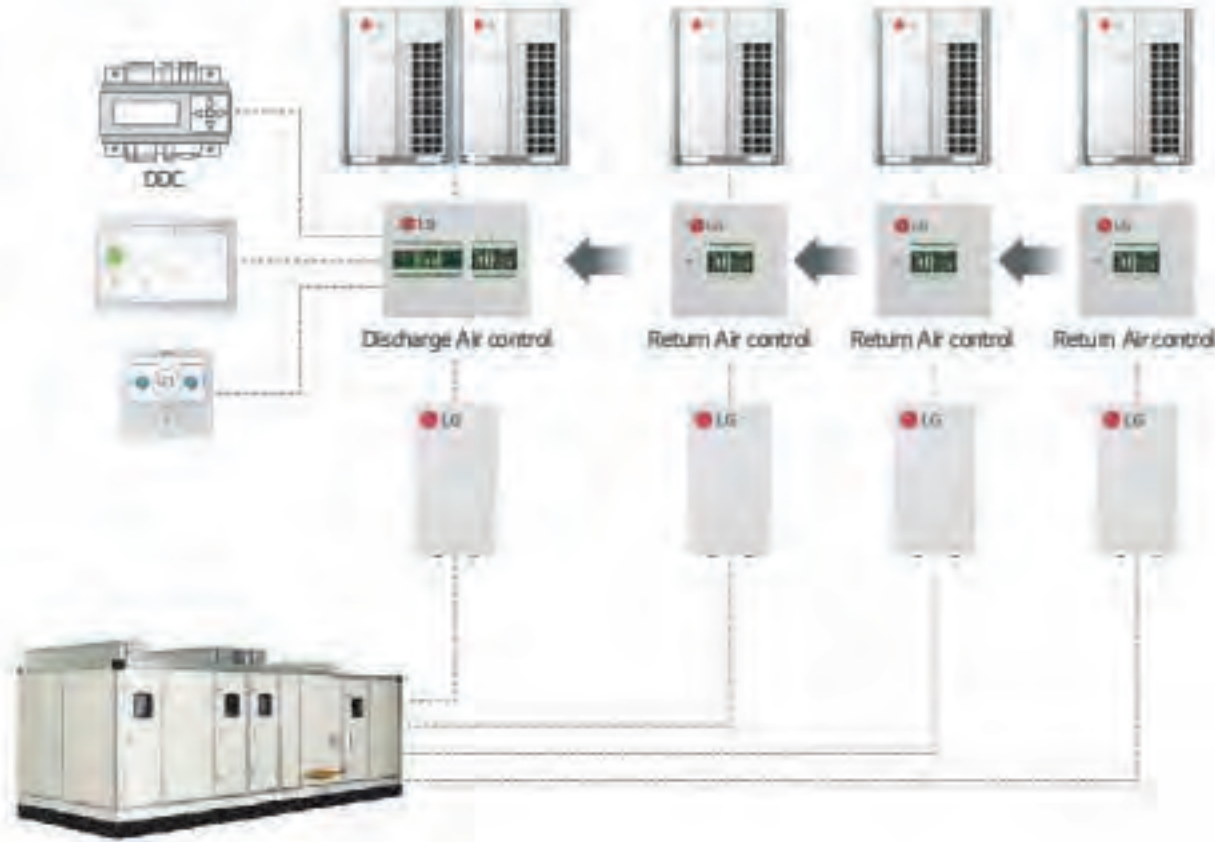

Communication Kit & Controller Module

Single Split Application


Single Split = Return / Room Air Temperature Control

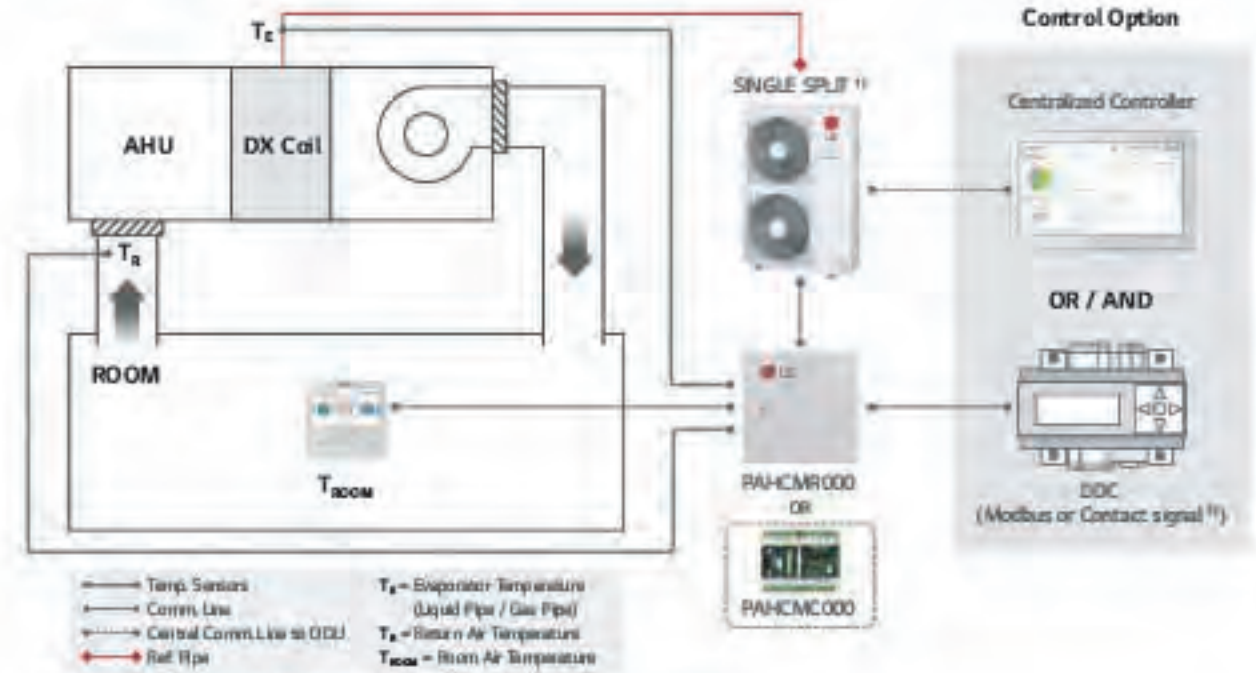

1) PMS (PMS-PH14AT) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note: For more detail, please refer to the PCB.

Single Split Application

Single Split = Discharge Air Temperature Control

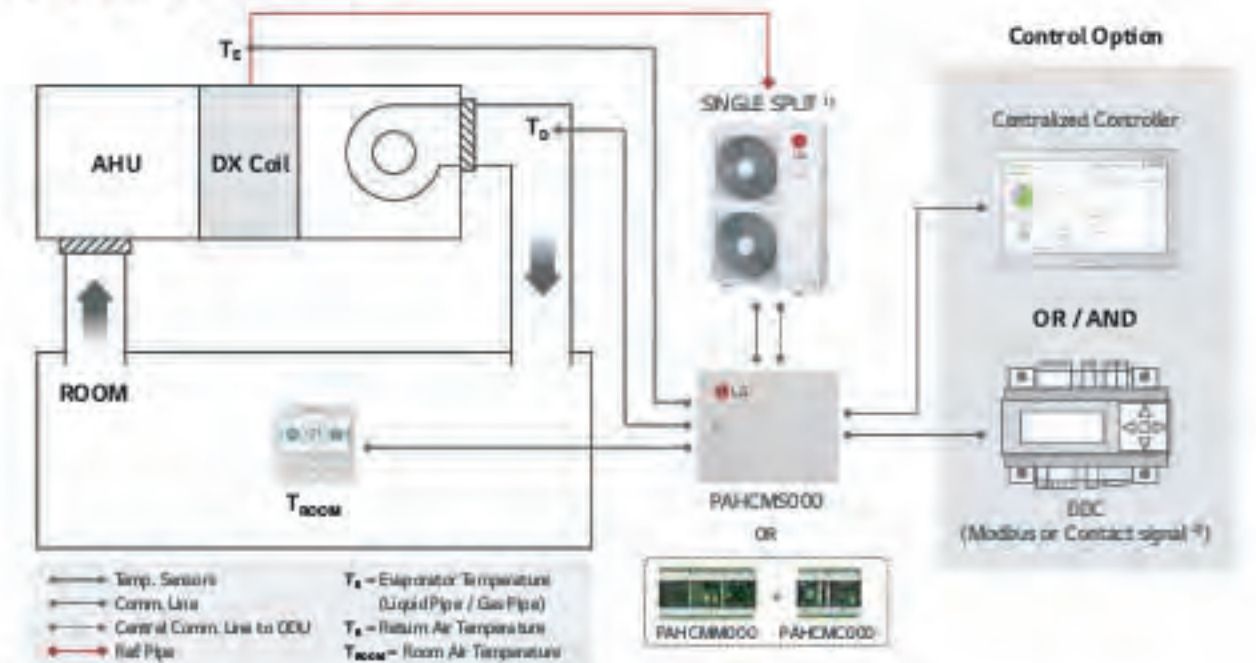


1) PMS (PMS-PH14AT) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note: For more detail, please refer to the PCB.

AHU Kit

Communication Kit & Controller Module

MULTI V Application

MULTI V + EEV Kit + IDU = Return / Room Air Temperature Control

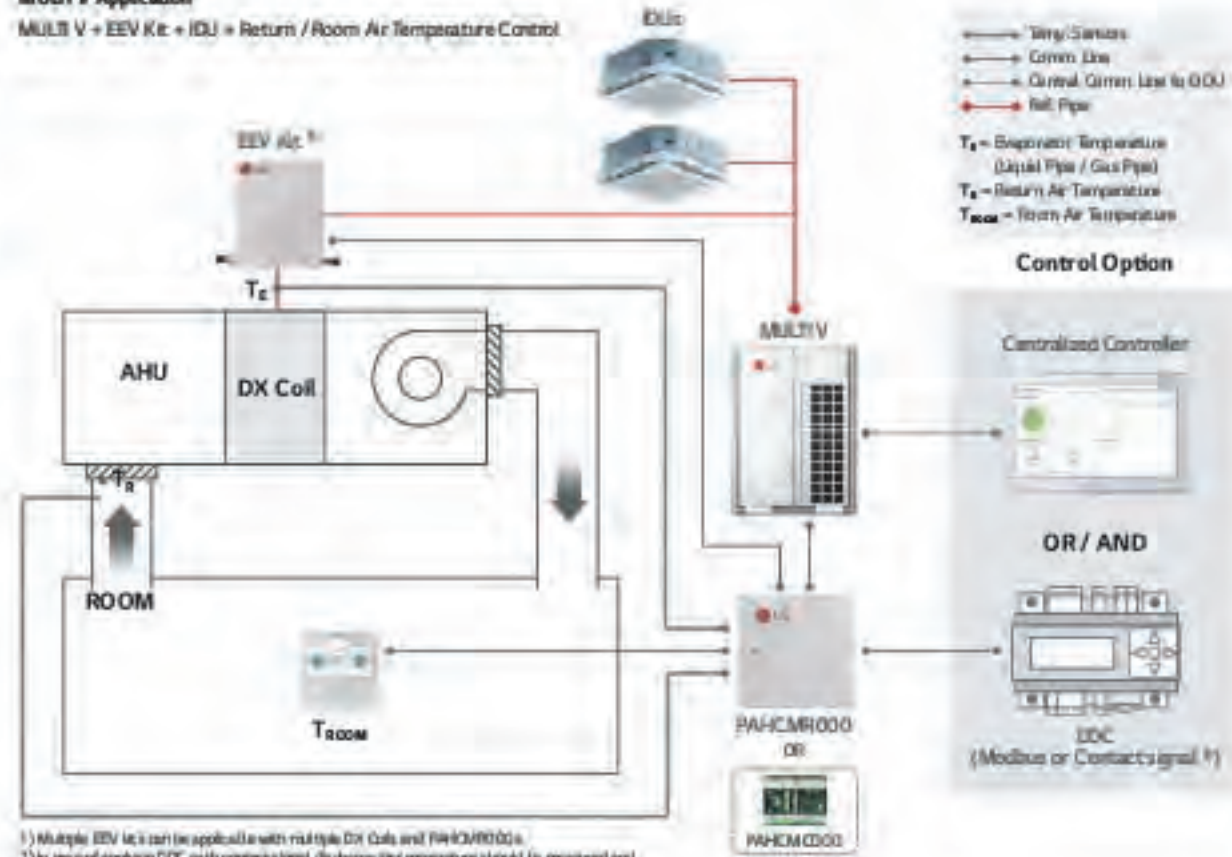


1) Multiple EEV kit can be applicable with multiple DX coils and PAHCMR000.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.

Note: For more detail, please refer to the PDB.

MULTI V Application

MULTI V + EEV Kit + Discharge Air Temperature Control

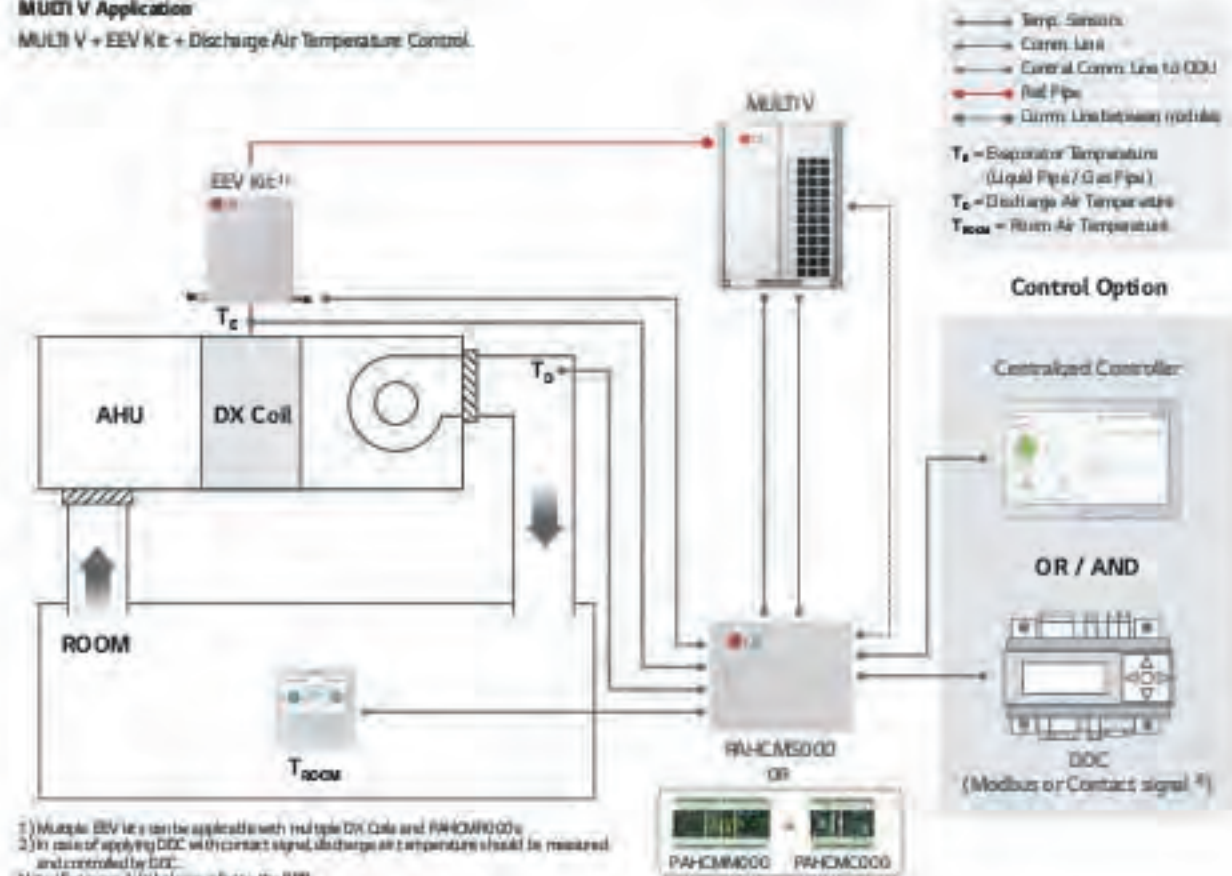

1) Multiple EEV kit can be applicable with multiple DX coils and PAHCMR000.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.

Note: For more detail, please refer to the PDB.

Communication Kit Function

Communication with DDC via Contact Signal

FUNCTION LIST	PAHCMR000 (PAHCMC000)	PAHCM5000 (PAHCMR000 + PAHCMC000)	TYPE	NOTE
Operation On / Off	On / Off	On / Off	Digital Input (Non Voltage)	-
Operation Mode	Cooling / Heating	Cooling / Heating	Digital Input (Non Voltage)	Available operation mode can vary depending on the settings of Communication Kit
Return (Room) Air Temperature ¹⁾	16 - 30 °C	-	Analog Input (DC 0 - 10 V / 20mA)	-
Control ¹⁾ Discharge Air Temperature ²⁾	-	-	-	Discharge air temperature should be controlled directly by DDC using ODU Capacity Control
Fan Speed ³⁾	-	High / Middle / Low	Digital Input (Non Voltage)	-
Forced Thermal	On / Off	-	Digital Input (Non Voltage)	-
ODU Capacity	-	10 - 100%	Analog Input (DC 0 - 10 V / 20mA)	-
Emergency Stop	-	Stop / Normal	Digital Input (Non Voltage)	-
Operation	On / Off ⁴⁾	On / Off	Digital Output (Max: DC 30 V / 1 A AC 250V / 1 A)	For PAHCMR000, dip sw1-3 DO Type should be set 'Off' (Status). In this case, 'fan speed' cannot be monitored by DO ports
Operation Mode	-	-	-	It needs to be checked through control signal
Fan Speed	High / Middle / Low	High / Middle / Low	Digital Output (Max: DC 30 V / 1 A AC 250V / 1 A)	For PAHCMR000, dip sw1-3 DO Type should be set 'On' (Fan Mode). In this case, 'On / Off', defrost, error Status' cannot be monitored by DO ports
Defrost Operation	Defrost / Normal	Defrost / Normal	Digital Output (Max: DC 30 V / 1 A AC 250V / 1 A)	For PAHCMR000, dip sw1-3 DO type should be set 'OFF' (Status). In this case, 'fan speed' cannot be monitored by DO ports
Error Alarm	Error / Normal	Error / Normal	Digital Output; Relay C contact (Max: DC 30 V / 1 A AC 250V / 1 A)	-
Compressor On / Off	-	On / Off	Digital Output (Max: DC 30 V / 1 A AC 250V / 1 A)	-

1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) The range of temp. is differ depending on the type of the control.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 Note: For more detail information, please refer to the product data book.

Communication with DDC via Modbus protocol

FUNCTION LIST	PAHCMR000 (PAHCMC000)	PAHCM5000 (PAHCMR000 + PAHCMC000)	NOTE
Operation On / Off	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	-
Return (Room) Air Temperature	16 - 30 °C	-	-
Control ¹⁾ Discharge Air Temperature ²⁾	-	Q	Dip SW1-2 Discharge Temp Control Type should be set 'On' Standard #1: 16 - 30 °C Standard #1*: 12 - 50 °C
Fan Speed ³⁾	High / Middle / Low	-	-
Forced Thermal On / Off	-	-	-
ODU Capacity Control ⁴⁾	-	10 - 100%	Dip SW1-2 Discharge Temp Control Type should be set 'On'
Emergency Stop	-	-	-
Operation	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	-
Return (Room) Air Temperature	Q	-	Corresponding air temperature sensor connected to AEU Comm.Kit is required
Discharge Air Temperature	-	Q	-
Fan Speed	High / Middle / Low	High / Middle / Low	-
Defrost Operation	Defrost / Normal	Defrost / Normal	-
Error Alarm	Error / Normal, Error code	Error / Normal, Error code	-
Compressor On / Off	On / Off	On / Off	-

Q: Applied, - / Not Applied
 1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) In case of PAHCM5000, control type between 'Discharge Air Temperature' and 'ODU Capacity Control' is selectable.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 4) Standard #1 used remote control for information 2.705a
 Note: For the Modbus memory map and more detail information, please refer to the product data book.

AHU Kit

Communication Kit Function

With LG Control System (Individual & Centralized Controller)

FUNCTION LIST	PAHCM0000 (PAHCM0000)	PAHCM5000 (PAHCM0000 + PAHCMC000)	NOTE
Operation On / Off	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	Available operation mode can vary depending on the settings of Communication Kit.
Return (Room) Air Temperature ¹⁾	16 ~ 30 °C	-	-
Discharge Air Temperature ²⁾	-	0	Standard II: 16 ~ 30 °C Standard III ⁴⁾ : 12 ~ 50 °C Central Controller: 12 ~ 50 °C
Fan Speed ³⁾	High / Mid / Low	High / Mid / Low	To control the AHU fan, dip switch 1-3 'DO type' should be set 'On (Fan Speed)' (PAHCM0000)
Operation	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	-
Return (Room) Air Temperature	0	-	-
Discharge Air Temperature	-	0	Standard II: 11 ~ 39.5 °C Standard III ⁴⁾ : 0 ~ 100.0 °C Central: -50.0 ~ 100.0 °C
Fan Speed	High / Middle / Low	High / Middle / Low	-
Defrost Operation	On / Off	On / Off	Only with Individual Controller
Error Alarm	Error Code	Error Code	Error code will be displayed on the screen
Compressor On / Off	On / Off	On / Off	Only with Individual Controller

0: Applied, -: Not Applied
 1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) The range of setting temperature is different depending on the type of the controllers. And operation may different from setting range.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 4) Standard II used remote controller after version 2103a.
 Note: For detailed information, please refer to the product data book.

Compatibility with LG HVAC Controllers

CONTROLLER	INDIVIDUAL CONTROLLER			CENTRALIZED CONTROLLER					BMS GATEWAY	POD
	PREMIUM	STANDARD III	STANDARD II	ACEZ	ACEZ TOUCH	ACS MINT 3	ACP 3	AC MANAGER 3	ACP LOWWORKS	PREMIUM STANDARD
Model no.	PREMTA000 PREMTA000A PREMTA000S	PREMTB100 PREMTB110	PREMTB000	PQCSZ23050	PACEZA000	PACSA000	PACPSA000	PACMSA000	RUNWAB000	PQMD15-40 PPWARD000
PAHCM0000	0	0	0	0	0	0	0	0	0	0
PAHCM5000	-	0 ²⁾	0	-	-	0	0	0	-	-

0: Applied, -: Not Applied
 1) AC Manager 3 is an integrator, so the installation with AC Smart 3 or ACP 3 is required.
 2) Set temperature range of the model shall be extended April, 2020.
 Note: 1. Dry contact for indoor unit (POFHC000 / 400 / 300 / 500) is not applied.
 2. For more details, please refer to the product data book.

Outdoor Unit Compatibility

For Small Size Application (~15kW) - Single Split

TYPE	MODEL	UUA1 (2.5 ~ 5.0 kW) 1)	UUB1 (5.0 ~ 8.0 kW) 1)	UUC1 (7.1 ~ 10.0 kW) 1)	UUD1 / UUD3 (10.0 ~ 15.0 kW) 1)
Communication Kit (Controller Module)	PAHCM0000 (PAHCM0000)	+	0	0	0
	PAHCM5000 (PAHCM0000 + PAHCMC000)	-	0	0	0
Control Kit	PAHCN0000	-	+	-	-

1) When connecting to Single Split outdoor unit, please check the compatibility to the regional sales office.

For Medium-Large Size Application (~672 kW) - MULTI V

TYPE	MODEL	MULTI V			MULTI V WATER		
		S	T	M	S	T	W
Communication Kit (Controller Module)	PAHCM0000 (PAHCM0000)	0	0	0	0	0	0
	PAHCM5000 (PAHCM0000 + PAHCMC000)	0	0	0	0	0	0
Control Kit	PAHCN0000	0	0	0	0	0	0

EEV Kit Compatibility

EEV KIT MODEL	CAPACITY INDEX (kW)		AHU APPLICATION KITS (MAXIMUM CONNECTABLE EEV KITS)			CONNECTION BY ODU SYSTEM		
	MIN.	MAX.	PAHCM0000 (PAHCM0000)	PAHCM5000 (PAHCM0000 + PAHCMC000)	PAHCM0000	MULTI V HEAT PUMP	HEAT RECOVERY	SINGLE SPLIT
PRLK04840	3.6	28	0 (1)	0 (1)	0 (6)	0	0	-
PRLK09640	28.1	36	0 (1)	0 (1)	0 (6)	0	0 (Max. 33.7 kW)	-
PRLK39640	56.1	112	0 (1)	0 (1)	0 (6)	0	-	-
PRLK59440	112.1	168	-	0 (1)	0 (3)	0	-	-

0: Applied, -: Not applied
 Note 1. Table of the outdoor unit compatibility is based on European regional model.
 2. When connecting outdoor unit to another area, please check whether they are compatible or not.
 3. European application kit compatibility is based on capacity index of the system & may changed according to system design condition.

AHU Kit


Control Kit

Field Supplied Item

LIST	REQUIRED SPECIFICATION	APPLY LOCATION
Temperature / Humidity Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Temperature range : -40 °C ~ 70 °C - Humidity range : 0 ~ 95 % RH	Supply air duct, Return air duct, Outdoor air duct
Temperature Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Temperature range : -50 °C ~ 50 °C	Supply air duct, Return air duct, Mixed air duct
Damper Actuator	- Power : AC 24 V - Input / output signal : DC 0 ~ 10 V - Torque : 15 Nm - Operation time : 150 s - Rotation Angle : 90°	Outdoor air damper, Exhaust air damper, Mixed damper
Filter Differential Pressure Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa - Switch type : Relay open / close	Filter
Static Pressure Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa	Supply air duct
CO2 Sensor	- Power : AC 24 V - Output signal : DC 0 ~ 10 V - Range : 0 ~ 2,000 ppm	Return air duct
Smoke Detector	- Power : AC 24 V - Type : Contact	Return air duct

Various Control with Control Kit - Multiple MULTI V - EEV Kits

Field Supplied Item

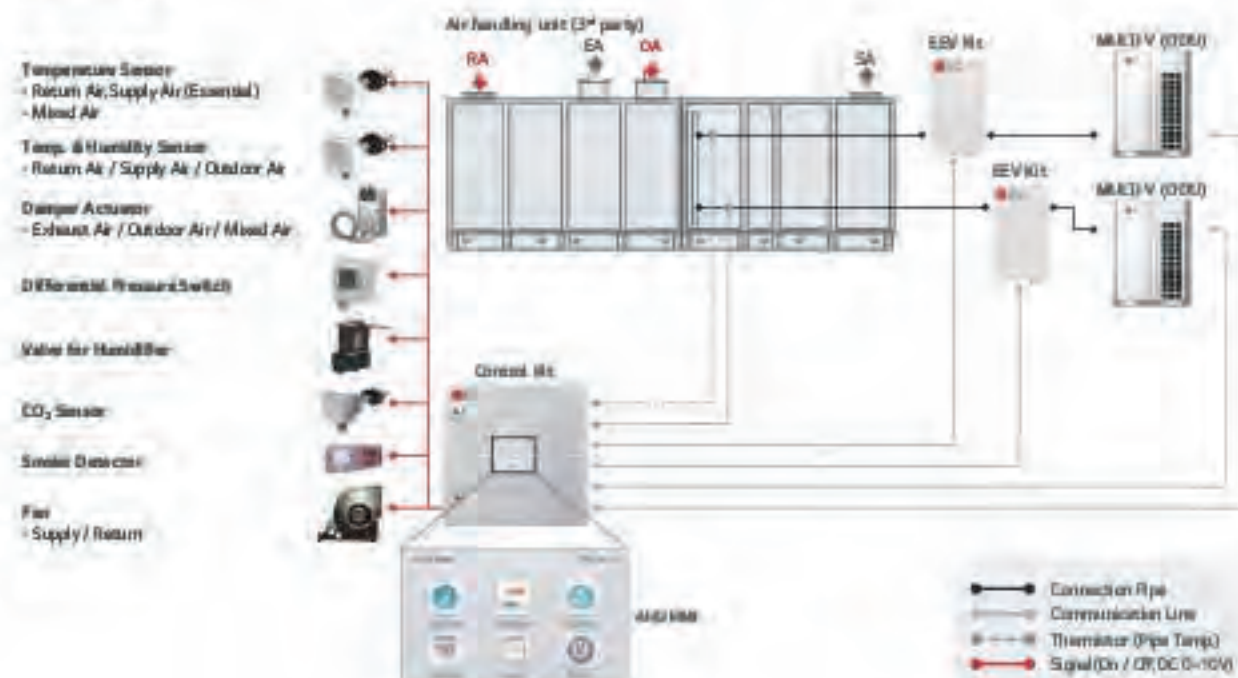

Water Communication Module

PAHCMW000


This module is intended to connect 3rd party plate heat exchanger to LG outdoor unit with the ability to control water temperature from 3rd party DDC or LG remote controller.



Overview

Interlocking with 3rd parties can make various solution with LG Multi V outdoor unit.

1. EEV
2. Solenoid Valve (NC)
3. Non-Return Valve
4. FS : Flow Switch
5. TT : DHW Temperature Transmitter

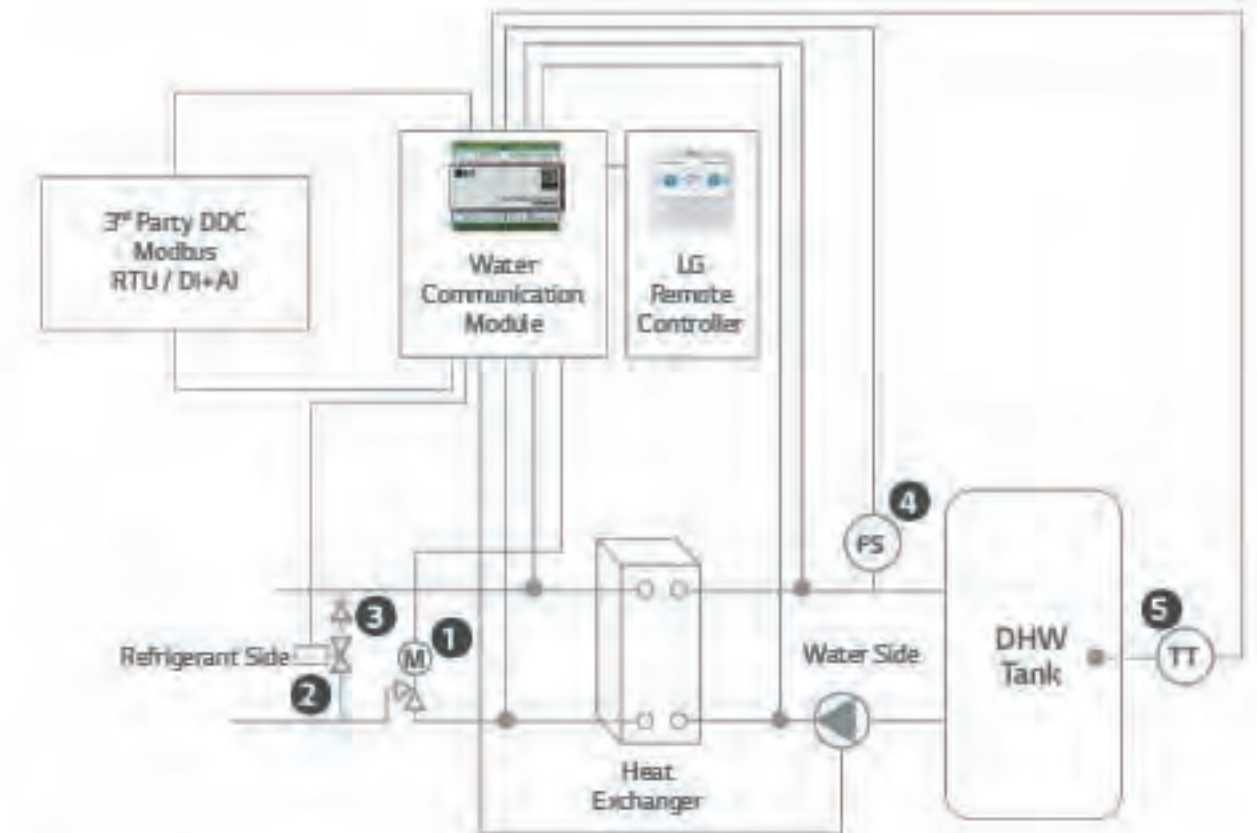

- 3rd party solenoid, non-return valve, heat exchanger flow switch and DHW temperature transmitter (Optional) must be purchased separately (PNL supplied term)

Water Communication Module

Features & Benefits

Interlocking with 3rd parties can make various solution with LG MULTI V outdoor unit.

Interlocking with 3rd Party Equipment

CONTENTS	CONNECTION PORT	FUNCTION	
RS485	CH1 (A+ / B-)	Module Comm. Port	Communication Port Modbus
	CH2 (A+ / B-)	IDU Comm. Port	Communication with Multi V Outdoor
UNIVERSAL INPUT (Cooling / Heating Setting)	UI1	Row Switch	Row Switch Input by 3 rd party
	UI2	0 - 10V Set Temp	Target Temp. Setting
	UI3	Cooling Thermostat Signal	Thermostat Cooling Signal
	UI4	Heating Thermostat Signal	Thermostat Heating Signal
UNIVERSAL INPUT (DHW Only)	UI1	Row Switch	Row Switch Input by 3 rd party
	UI2	0-10V Set Temp	Target Temp. Setting
	UI3	DHW Temperature Transistor 0 - 10V	Measured Water Temp. Input by 3 rd party 0 - 10 V sensor
	UI4	DHW Thermostat Signal	DHW Heating Signal
NTC	R1	Water Inlet Sensor	PHEX Water Inlet Sensor
	R2	Water Outlet Sensor	PHEX Water Outlet Sensor
REMO	+12V / 5G / GND	LG Remote Controller	
SINGLE	Reserved		
	DO1	Defrost / Mode	Output for defrost signal and / or cool mode
	DO2	Pump	Output signal for pump on / off
DIGITAL OUTPUT	DO3	Bypass	Output signal for PHEX Bypass Valve
	R3	Thermistor Pipe In	PHEX Ref. Inlet Pipe Sensor
NTC	R4	Thermistor Pipe Out	PHEX Ref. Outlet Pipe Sensor
	EEV	+12V / 1 / 2 / 3 / 4	Expansion Valve

Compatibility & Accessory

EEV (LG MODEL)

MODEL	CAPACITY (kW)		PANEWOOD
	MIN.	MAX.	
PAEEVC000	3.6	28	HP / HR
PRLK048A0	3.6	28	HP / HR
PRLK096A0	28.1	56	HP

Note: Water communication module can accept plate heat exchanger from 3.6 to 113 kW for combination with Multi V Outdoor units.

LG Controllers

CONTROLLER	INDIVIDUAL CONTROLLER	CENTRALIZED CONTROLLER		DRY CONTACT
	HEATING STANDARD II	AC EZ TOUCH	AC SMART S	
	PREMTW101	FACEZA000	FACESSA000	PDRYCB000

Specification for Field supply item

The 3rd party can select the for best usable version

Solenoid valve for Bypass

CAPACITY (kW)		EEV TYPE	SYSTEM	KV VALUE OF SOLENOID AND NON-RETURN VALVE	PIPE SIZE
MIN.	MAX.				
3.6	28	PAEEVC000 PRLK048A0	HP / HR	0.95	3/ 8" / 9.52mm
28	56	PRLK096A0	HP	1.9	1/ 2" / 12.7mm

Flow switch


The nominal flow and cut off flow can be calculated using the values below.

CONTROLLER	NOMINAL FLOW	FLOW SWITCH CUT OFF
L / min/kW	329	123

* Example: (CO) nominal Cooling Capacity 28 kW x 329 = 9212 L / min, nominal flow 28 x 1.23 = 34.44 L / min, flow switch cut off


Installation Scene with Contact Connection

Contact signal + DHW Only Setting

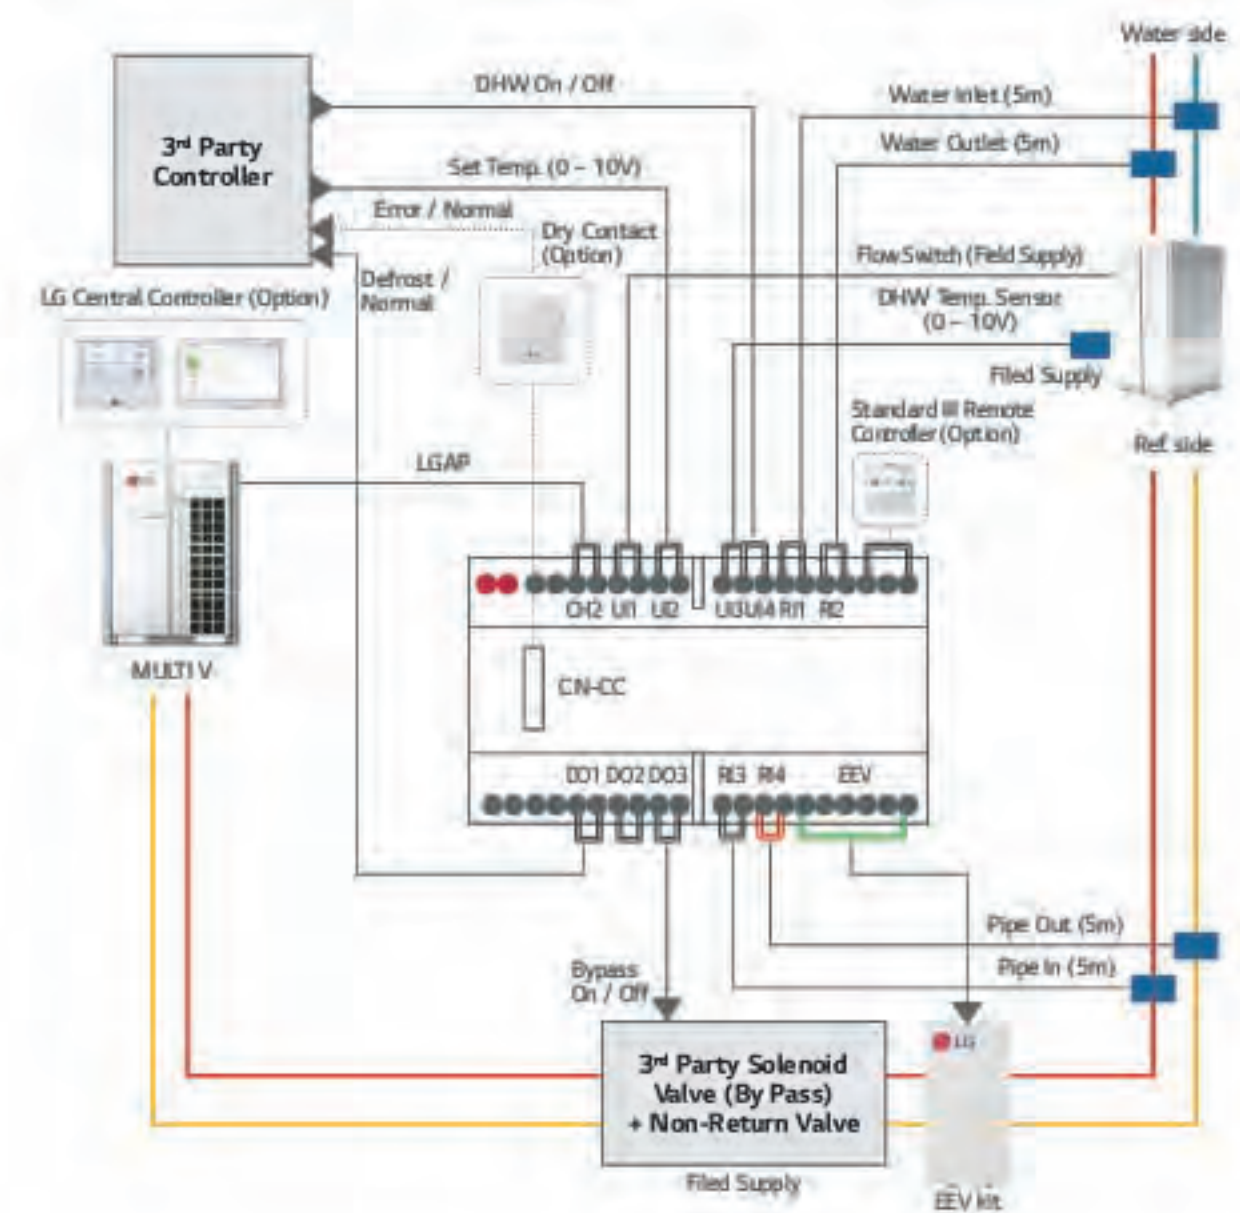


Water Communication Module

Installation Scene with Contact Connection
 Contact signal + Heating / Cooling Setting

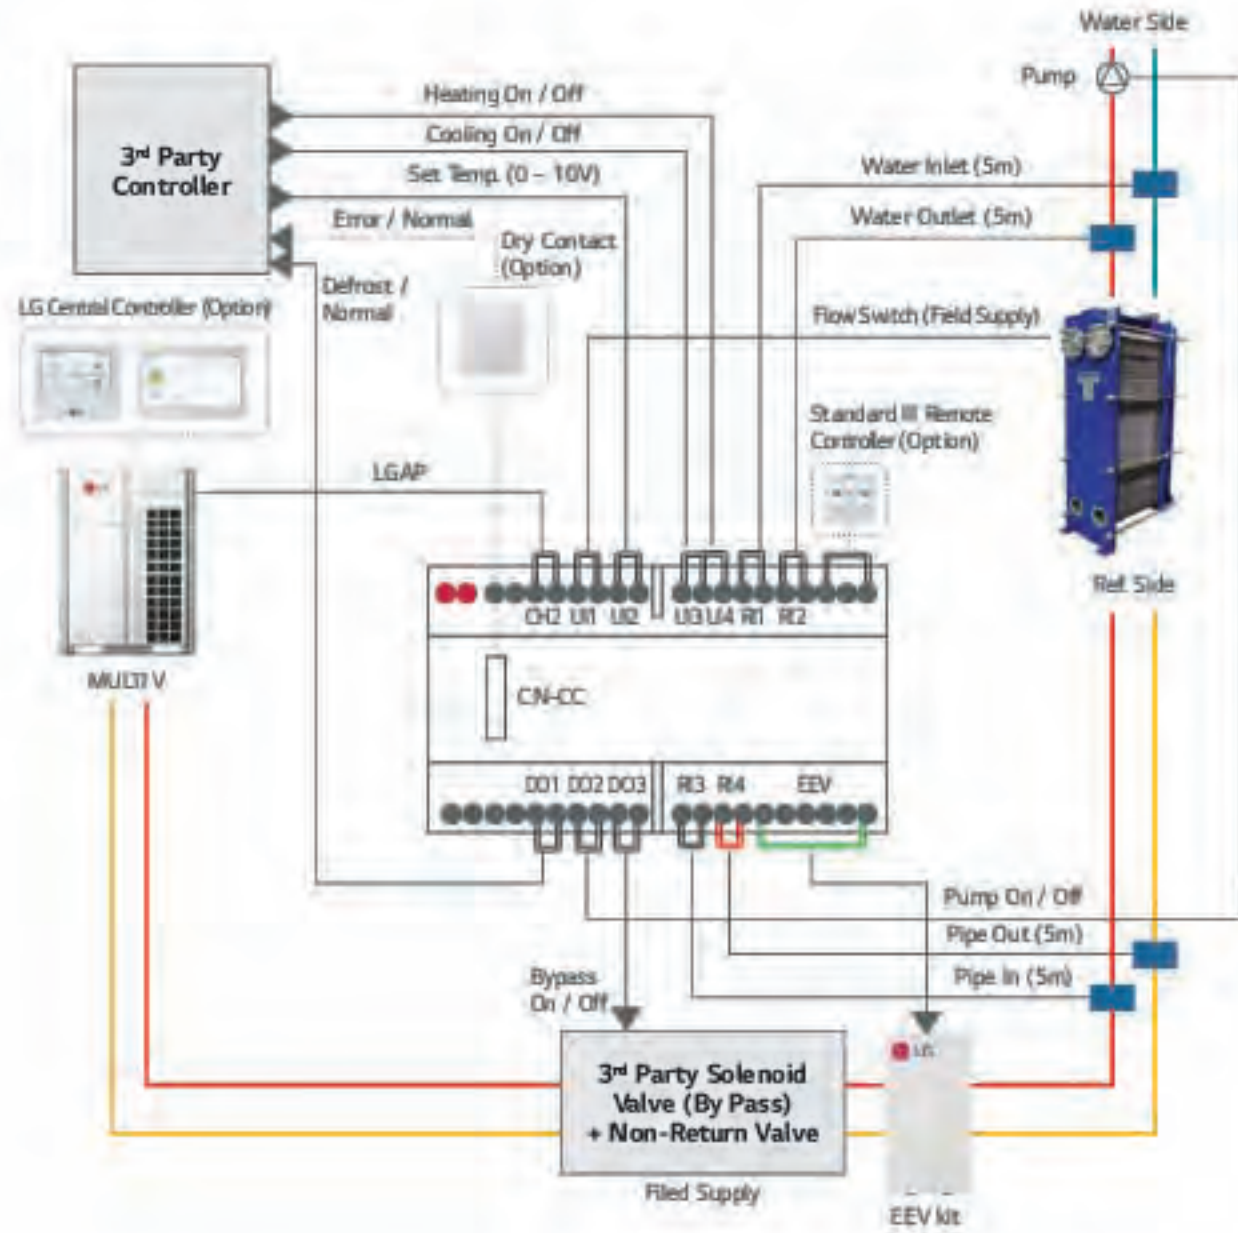



Installation Scene with Modbus / LG Control (Optional) Connection
 Modbus + DHW Only Setting

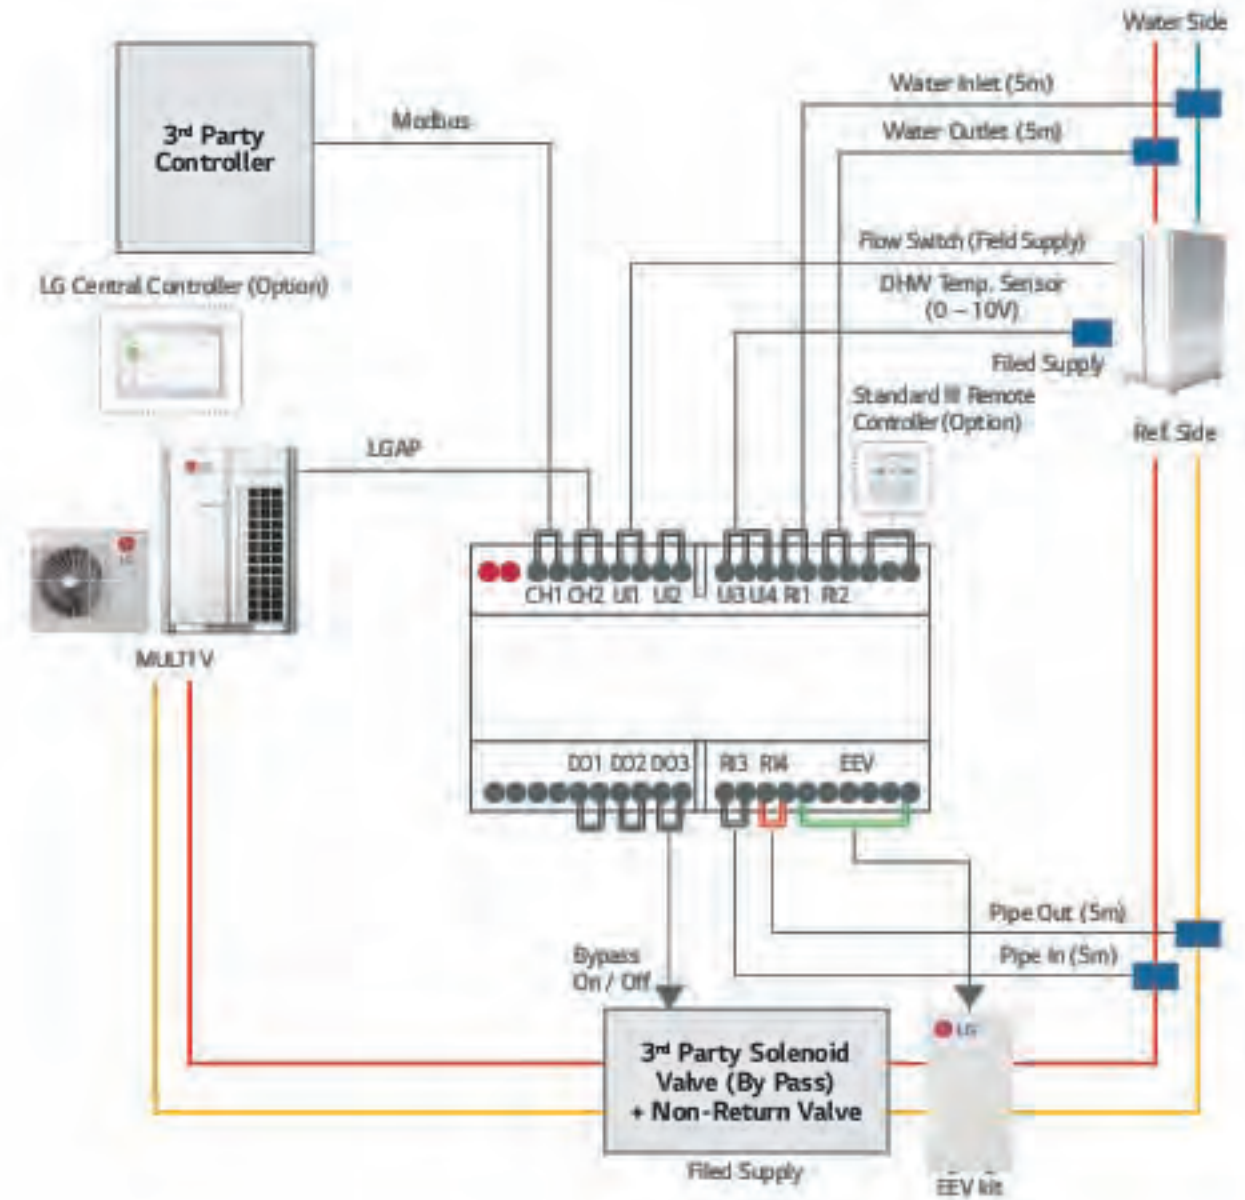

With view of Contact control, LG controllers can only support monitoring functions.

Water Communication Module

Installation Scene with Modbus / LG Control (Optional) Connection
 Modbus + Heating / Cooling Setting

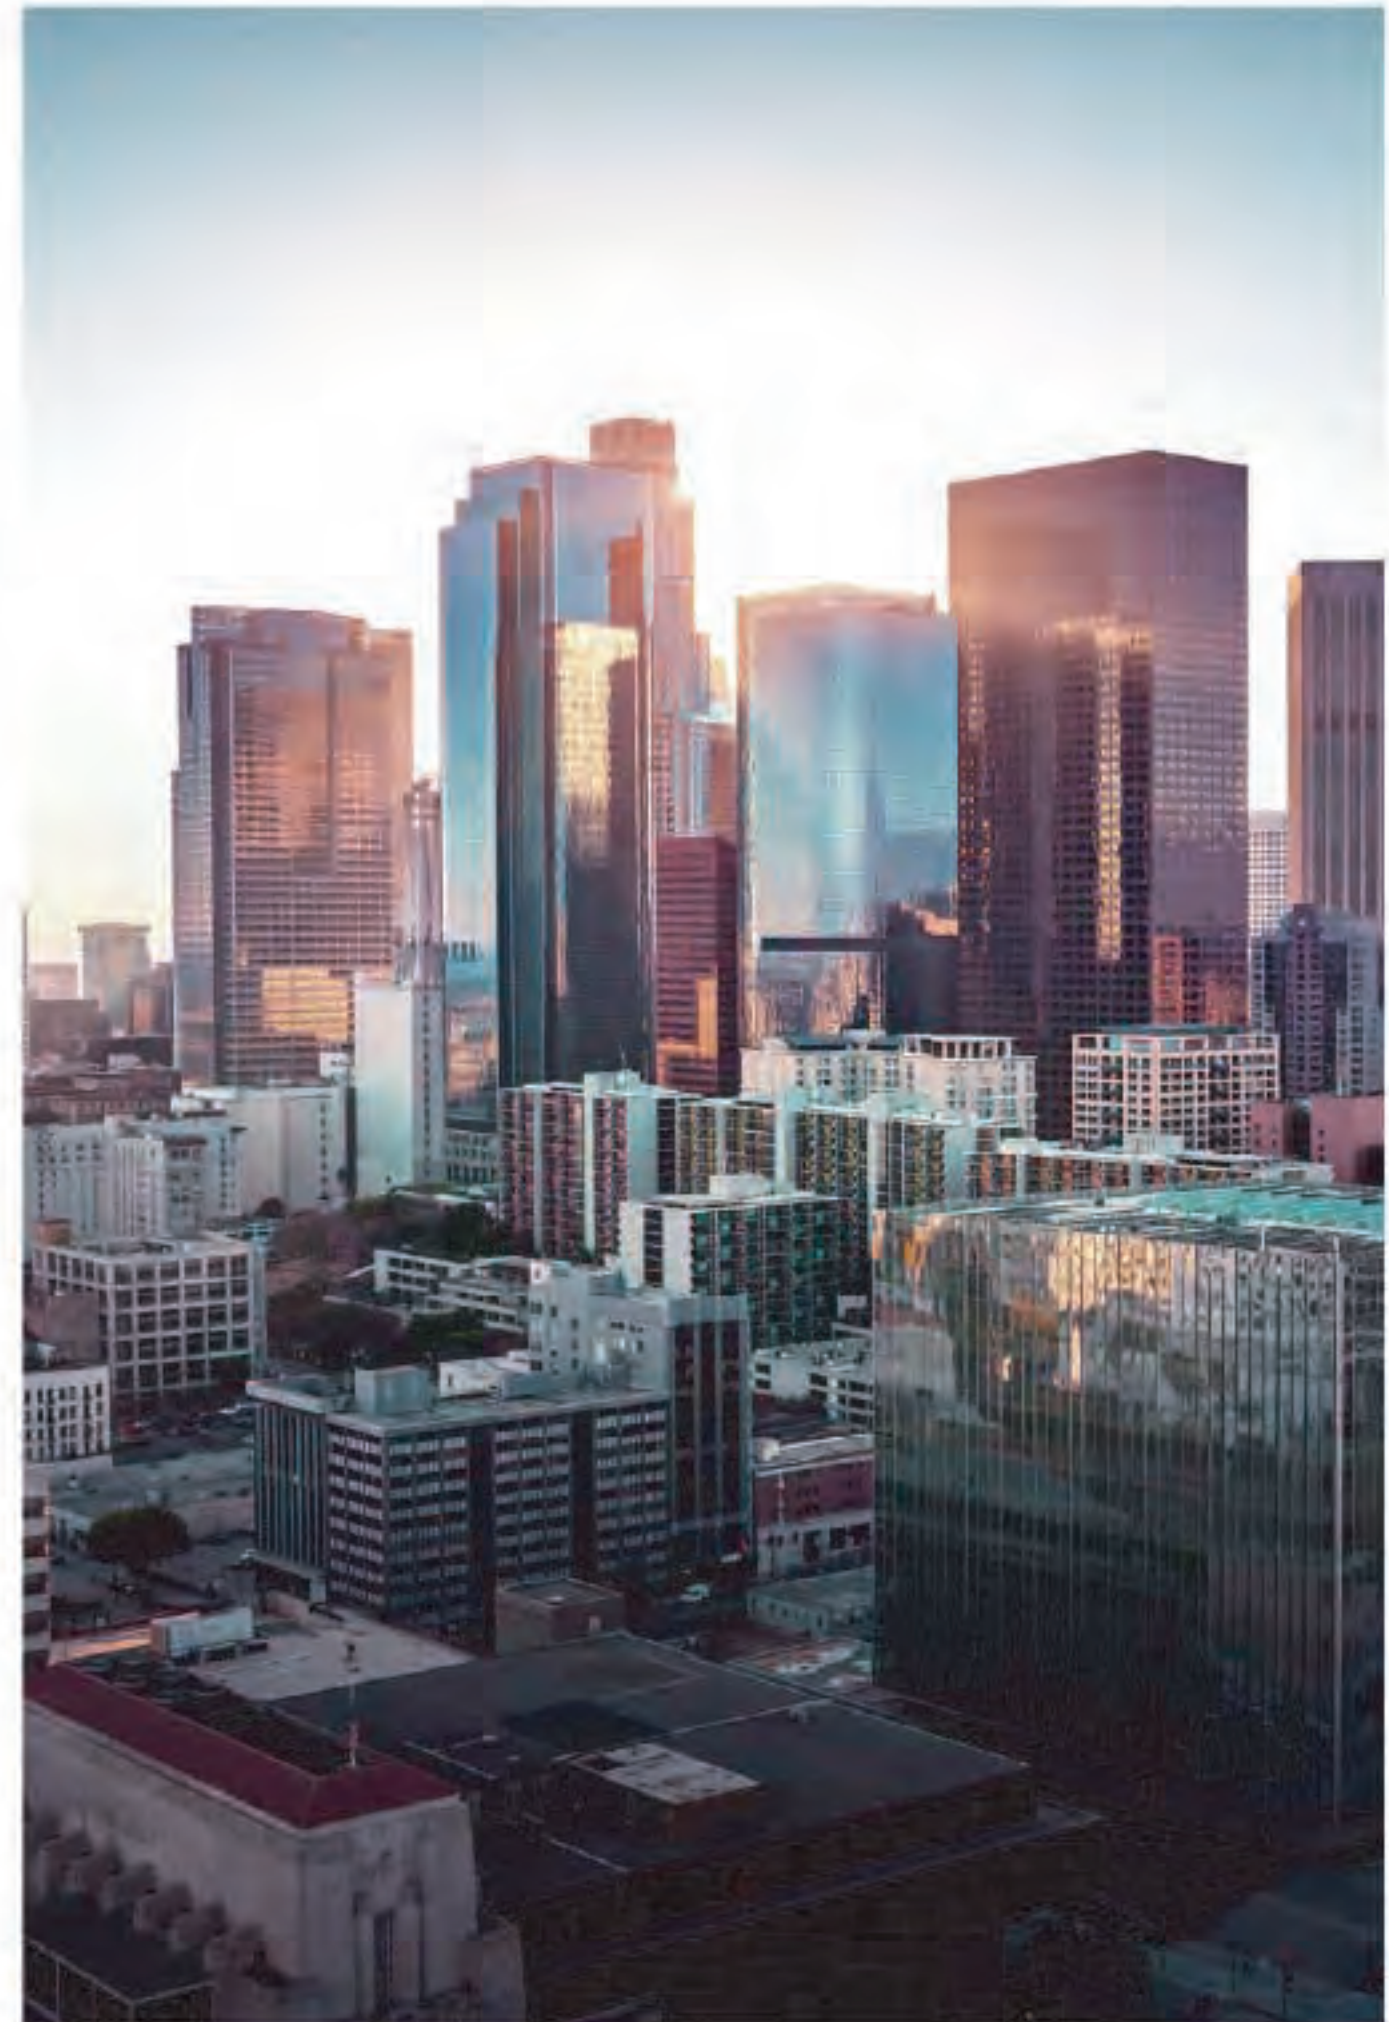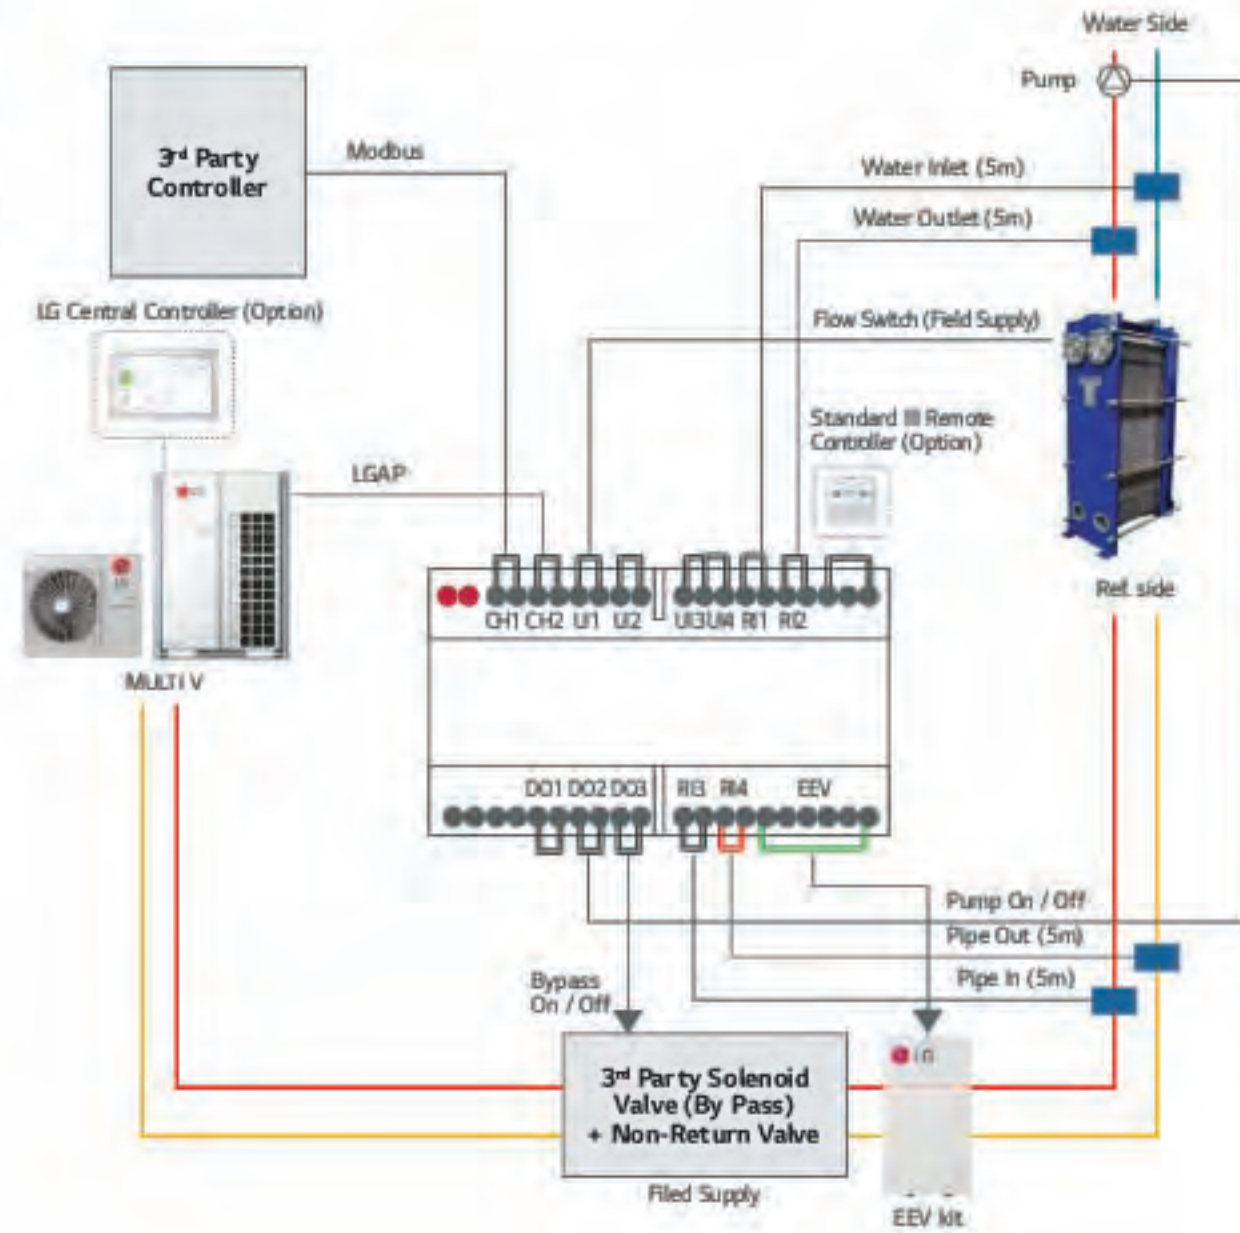

Hotel Control Solution

Guest Room
Air conditioner automatically switches off when guests depart.

Integrated control of air conditioner with the hotel room controller.

Air conditioner can be controlled with existing hotel thermostat.

Prioritizes guest safety with refrigerant leak detection.

Reception
Air conditioner control in conjunction with check-in or check out.

Public Areas
Centralized management of the public areas.

Design Proposal

GUEST ROOM				LOBBY
The air conditioner automatically turns off when guests leave.	Integrated control of air conditioner with the hotel room controller.	Control with existing hotel thermostat.	Guest safety is the first priority.	Air conditioner control in conjunction with check-in or check out.
PDRYCB400 2 contact point	PDRYCB500 Modbus RTU (9,600bps)	PDRYCB320 8 contact point	PRLDNV50 Refrigerant leakage detector • 6000ppm	PACSSA000 AC Smart 5 • BMS Integration (BACnet, IR, Modbus, TCP)
Input • Operation On / Off	Function • Operation • Indoor temperature • Error alarm • Set run mode • Set temperature • Set fan speed	Input • Universal Input • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High)		
Output • Operation On / Off status • Error alarm		Output • Operation On / Off status • Error alarm	PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button	PACPSA000 ACP 5 • BMS Integration (BACnet, IR, Modbus, TCP)

Shopping Mall Control Solution

Retail
Proportionally distribute and manage the power consumption by tenants.

Real-time system issue detection and alarms.

Maintenance Office
Reduces energy by checking operational trends.

Atrium
Integrated management of AHU applied to large spaces.

Chiller and VRF integrated control.

Design Proposal

RETAIL	MAINTENANCE OFFICE	ATRIUM		
Proportionally distribute and manage power consumption by the tenant.	Fast problem detection and alarms.	Reduces energy by checking operational trends.	Integrated management of AHU applied to large spaces.	Chiller and VRF integrated control.
PPWVB8000 PDI Standard (2 ports) • Max 128 EDU	PACSSA000 AC Smart 5 • BMS Integration (BACnet, IR, Modbus, TCP)	PACMBR000 AHU CommJ0t • Return air	PACHLN000 Chiller Option Kit Chiller Option Kit (S / W) ACP 5	PACPSA000 ACP 5 PACSSA000 AC Smart 5
PQNUD1540 PDI Premium (8 ports) • Max 128 EDU	PACPSA000 ACP 5 • BMS Integration (BACnet, IR, Modbus, TCP)	PACMGS000 AHU CommJ0t • Discharge air		

Hospital Control Solution




- Hospital Ward**
 - Proper airflow management for patients
 - Monitor the comfort level for each hospital ward
 - Control fan speed and air volume
- Service Zone**
 - Energy savings based on flexible scheduling
- Lobby**
 - Centralized management of AHU for large spaces

Design Proposal

HOSPITAL WARD			SERVICE ZONE	LOBBY
Proper airflow management for patients	Monitor the comfort level for each hospital ward	External device (interlock control)	Energy savings based on flexible scheduling	Centralized management of AHU for large space
PTV5MA0 Human detection sensor	PACSSA000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PORYCB400 2 contact point Input: • Operation On / Off Output: • Operation On / Off status • Error alarm	PACSSA000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PAHCMR000 AHU Controller • Return air
PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button	PACPSA000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)		PACPSA000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)	PAHCMG000 AHU Controller • Discharge air

Academic Institution Control Solution

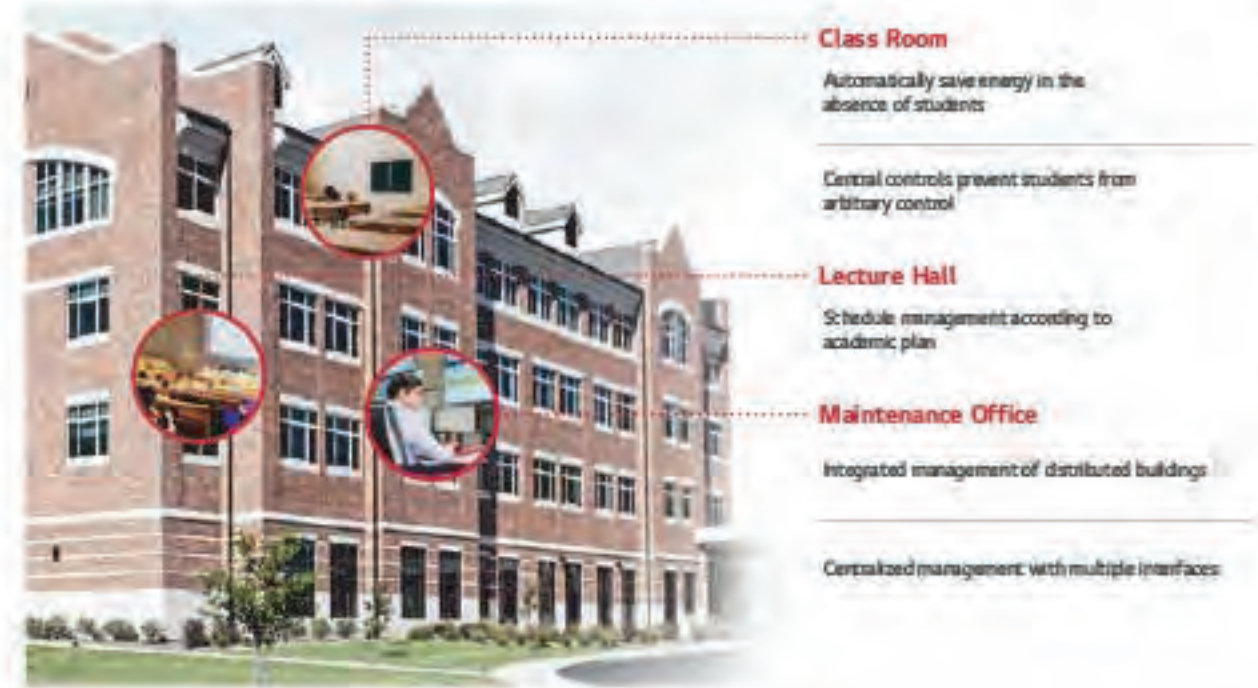

- Class Room**
 - Automatically save energy in the absence of students
 - Central controls prevent students from arbitrary control
- Lecture Hall**
 - Schedule management according to academic plan
- Maintenance Office**
 - Integrated management of distributed buildings
 - Centralized management with multiple interfaces

Design Proposal

CLASS ROOM	LECTURE HALL	MAINTENANCE OFFICE	
Automatically save energy in the absence of students	Central controls prevent students from arbitrary control	Integrated management of distributed buildings	Centralized management with multiple interfaces
PTV5MA0 Human detection sensor		PACSSA000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PACMSA000 AC Manager 5
PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button		PACPSA000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)	

Office Control Solution

Maintenance Office
Energy savings and management throughout the building

Integrated management of HVAC with BMS system

Reduce costs by replacing BMS

Office Room
Reasonable power distribution to tenants

Server Room
24-hour backup management

Meeting Room
Energy savings based on occupancy detection

Residential Control Solution

Home
Anytime, anywhere air conditioner control and access

Integrate systems for smart connectivity throughout

Bed Room
Use a familiar residential thermostat

Simple interlocking control by remote control

Apartment / Residence
Stable system operation

Design Proposal

MAINTENANCE OFFICE	OFFICE ROOM	SERVER ROOM	MEETING ROOM
Energy savings and management throughout the building	Reasonable power distribution to tenants	Main equipment 24 hours backup management	Energy savings based on occupancy detection
 Target Forecasting	 WHM (Watt-Hour Meter) Pulse signal	 24	 Human detector sensor
Integrated management of HVAC with BMS system BMS Protocol BMS System	Reduce costs by replacing BMS Pump Lighting Fan Sensor	Power 100 kWh PD	PTVSMA0 Human detection sensor
 PACSSA000 AC Smart 5 • BMS Integration (BACnet IP Modbus TCP)	 PLNWR8000 LonWorks gateway	 PACSSA000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	 PTVSM000 Human detection sensor
 PACPSA000 ACP 5 • BMS Integration (BACnet IP Modbus TCP)	 PMBUS800A Modbus RTU gateway	 PACPSA000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)	 PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button
 PEXPM8000 ACSIO Module	 PQNUD1540 PD Premium (8 ports) • Max. 128 I/O	 PQNUD1540 PD Premium (8 ports) • Max. 128 I/O	 PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button
 PEXPM300 ACSIO Module	 PEXPM200 ACSIO Module	 PEXPM100 ACSIO Module	 PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button




Design Proposal

HOME	BED ROOM	APARTMENT
Control your home air conditioner anytime, anywhere	Use a familiar residential thermostat	Stable system operation when indoor unit power is lost
 Build a Smart house	 Simple interlocking control by remote control	 Independent power module
 PWFMD0200 Wi-Fi modem	 PDRYCB500 Modbus RTU (9,600bps)	 PRIP0 Independent power module • EEV full close function
Function: • On / Off • Fan speed • Operation mode • View control • Reservation (Sleep, Weekly On / Off) • Error check	Function: • Operation • Indoor temperature • Error alarm • Set operation mode • Set temperature • Set fan speed	Input: • Universal input • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High)
 PDRYCB320 8 contact point	 PREMTB100 Wired remote controller • 4.3 inch color LCD • Touch button	Output: • Operation On / Off status • Error alarm

318 - 339

ACCESSORIES

MECHANICAL ACCESSORIES / PIPING ACCESSORIES

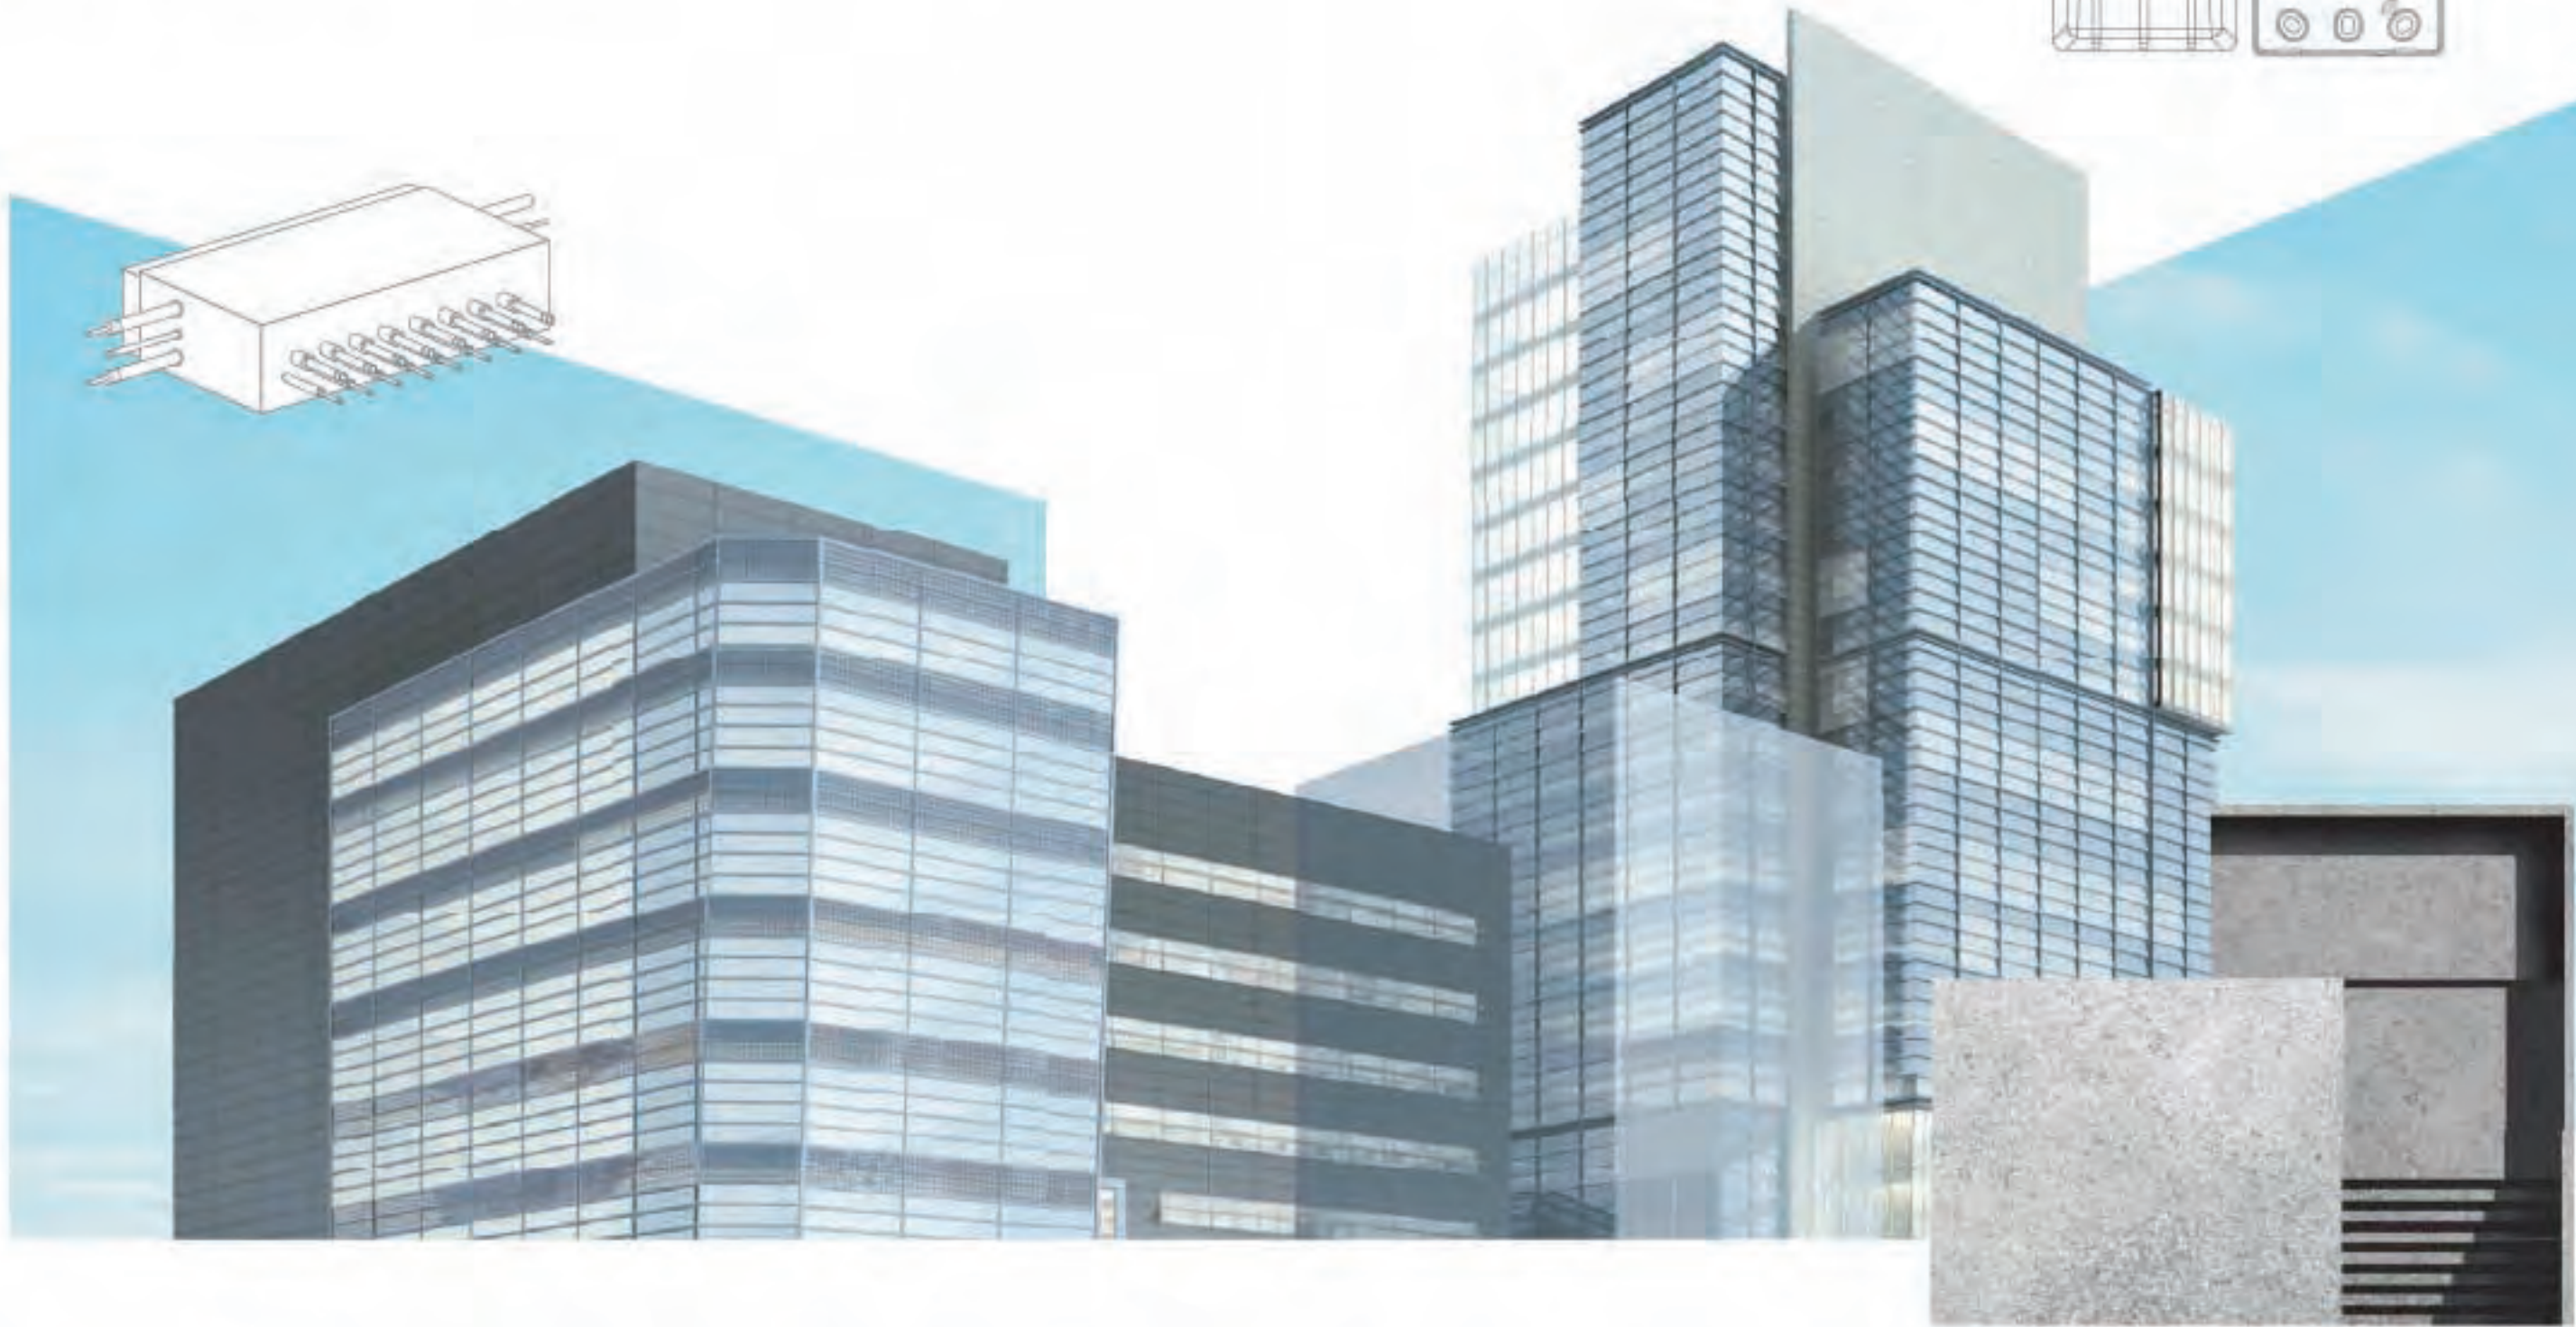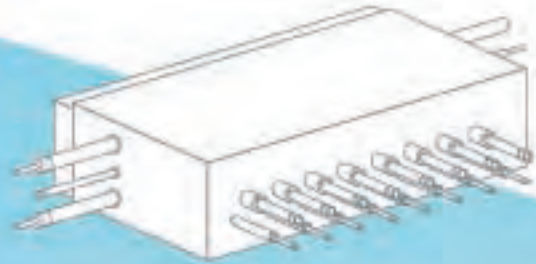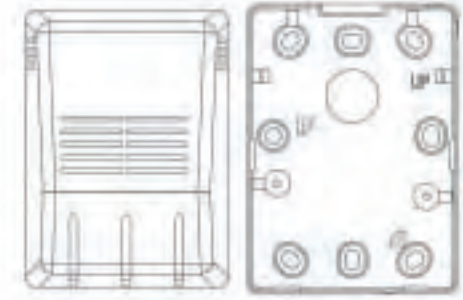

Cassette Panel

The Independent Vane Operation makes desired and comfortable air flow



Model Name & Applied Products

4 Way Cassette (Mini, 570x570)
PT-QAGWO
PT-QCHWO
PT-UQC

2 Way Cassette
PT-USC

1 Way Cassette (Grill Type)
PT-UAHGO / PT-TAHGO (Glossy)
PT-UAHWO / PT-TAHWO (Non-Glossy)
PT-LPHGO / PT-TPHGO (Glossy)

1 Way Cassette (Air Purification)
PT-LPHGO / PT-TPHGO

Key Features

- Independent vane operation uses separate motors, making it possible to control all 1, 2, and 4 vanes independently.
- The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain pipe and refrigerant pipes.

Compact and Stylish Design

- New 4 way cassette panel adapted unibody shape and matching with into the ceiling.
- Panel size is fit into the ceiling tile.




Specification

Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)			Applied Model Capacity (kW)*						
					W	H	D	Single Split		Multi Split		Mini V		
						R32	R410A	R32	R410A	R32	R410A			
4 Way	PT-QCHWO	Grill	Morning Fog (RAL 9001)	X	3.0	620	35	620	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
	PT-UQC	Grill	Morning Fog (RAL 9001)	X	3.0	700	22	700	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
	PT-QAGWO	Grid	White (RAL 9003)	X	2.9	620	35	620	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
2 Way	PT-USC	Grill	Morning Fog (RAL 9001)	X	4.7	1,100	28	690	2.8-7.1 2.8-7.1					
	PT-UAHGO	Grill	White (RAL 9003)	O	3.9	1,160	34	500	2.6-3.5		2.6-3.5		2.2-3.6 2.2-3.6	
1 Way	PT-TAHGO	Grill	White (RAL 9003)	O	4.8	1,480	34	500	2.6-3.5		2.6-3.5		5.6-7.1 5.6-7.1	
	PT-UAHWO	Grill	White (RAL 9003)	X	3.3	1,100	34	500	2.6-3.5		2.6-3.5		2.2-3.6 2.2-3.6	
	PT-TAHWO	Grill	White (RAL 9003)	X	4.5	1,420	34	500	2.6-3.5		2.6-3.5		5.6-7.1 5.6-7.1	
	PT-LPHGO	Grid	White (RAL 9003)	O	4.1	1,160	34	500	2.6-3.5		2.6-3.5		2.2-3.6 2.2-3.6	
	PT-TPHGO	Grid	White (RAL 9003)	O	4.9	1,480	34	500	2.6-3.5		2.6-3.5		5.6-7.1 5.6-7.1	

*Based on cooling capacity
#O: Applied, -: Not applied

Dual Vane Cassette Panel



Model Name

PT-AAGWO
PT-AFGWO

Key Features

Model	Function					
	Dual Vane	Wi-Fi	Floor Temperature Sensor	Air Purification	Etching Grille	Humid Detection Sensor
PT-AAGWO	O	Optional	Optional	X	X	Optional
PT-AFGWO	O	Optional	Optional	Optional (Dust Sensor/Tact. Switch)	X	Optional

Specification

Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)		
					W	H	D
PT-AAGWO	Grid	White (RAL 9003)	-	7.1	950	35	950
PT-AFGWO	Grid	White (RAL 9003)	-	7.5	950	35	950

Air Purification Kit

Model	Image	Model name	Dielectric Dust collecting filter	Photocatalytic Deodorizing filter	HAPS	Ionizer
Air cleaning kit		PTAHPO		O	O	O
		PTAHPO		O	O	O

Cassette Cover

Cover in case of exposed cassette installation.



Key Features

- Specialy designed for indoor unit.
- Covers the side area of cassette.
- Gives elegant look.
- Light weight.

Specification

Model	Front Panel	Weight (kg)		Dimension (mm)			
		NET	Gross	W	H	D	
PTDCM	PT-AAGWO / PT-AFGWO	TA	5.9	8.8	1,157	1,157	268
	TR	5.9	8.8	1,157	1,157	310	
PTDCQ	PT-UQC	TR	5.0	7.3	907	907	268
	TQ	5.0	7.3	907	907	310	

Model Name

PTDCM / PTDCQ

Applied Products

4 Way Cassette (for chassis TA, TB, TQ, TR)

Included Parts

- Cover A, Cover B
- Cover C, Cover D
- Screws
- Installation Manual



CO₂ SensorCO₂ sensor in ventilation system.

Model Name
AHCS100H0

Applied Products
LZ-H025GBA4
LZ-H035GBA5 / LZ-H050GBA5
LZ-H080GBA5 / LZ-H100GBA5
LZ-H150GBA5 / LZ-H200GBA5

Applicable Products
LZ-H050GXND / LZ-H080GXND
LZ-H100GXND / LZ-H050GXND
LZ-H080GXND / LZ-H100GXND

Key Features


Specification
- Applied Model: ERV (Embedded), ERV DX (Option)
- Supply voltage: DV 12V ± 5%
- Output: 0.5 ~ 4.5V (Linear output, 240 ~ 1,760 ppm CO₂)
- Accuracy: ± 10% (2 days after installation)

Description
- The product is especially designed to detect CO₂
- This model requires Standard III Wired Remote Controller for display

Dimensions (Unit: mm)




Key Application

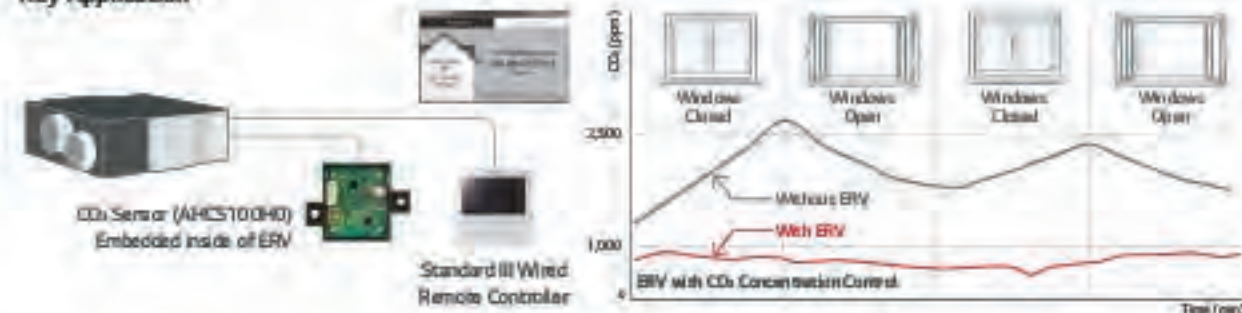

How to Install

1. Remove a screw on the service cover. Pull the service cover (ring bracket (1)), then remove the service cover (2). Remove two elements (3) and two air filters (4).
 2. Install the sensor with two screws.
 3. Remove a screw, then remove the right side of elemental (5).
 4. Press the holder (6) into the hole to fix the CO₂ sensor or cable (7).
 5. Connect the wire terminal to the CN-CO₂ part of PCB.
- ※ Airflow can be controlled by concentration of CO₂ after setting automatic operation mode at remote controller.
※ Use the screwdriver whose total length is less than 250mm.

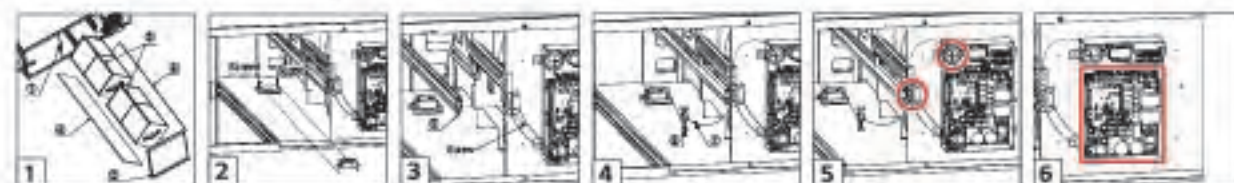

Refrigerant Leakage Detector

R410A refrigerant leakage detector ensures room safety.



Model Name
PRLDW50

Applied Products
Multi V 5
Multi V IV Heat Pump & Heat Recovery
Multi V Water IV

Key Features

- This detector senses refrigerant leakage when the refrigerant concentration exceeds 6,000ppm (The green and red LED lights blink simultaneously)
- Alarm is "on" when refrigerant leaks out more than 6,000ppm for 5 seconds. If it is reduced less than 6,000ppm for 5 seconds, alarm is "off"
- When the alarm of the refrigerant leak detector is switched on the user must ventilate the room until the alarm is disabled.
- The detector has to be installed inside the room and it should be installed 300 ~ 500mm above the floor.

Specification

Parts	Specification	
Sensor	Rated Voltage (V)	DC 5.0 ± 5%
	Dimensions (W x H x D, mm)	31 x 44 x 20
	Weight (g)	22
	Detectable Refrigerant	R410A
	Detectable concentration (ppm)	0 / 6,000 Alarm Off / On
	Operating temperature range (°C)	-10 ~ 50
	Preserve of temperature range (°C)	-40 ~ 60
Connecting cable	Average power consumption (mA)	35
	Cable length (m)	10
Sensor protective cover	Dimensions of Front Plate (W x H x D, mm)	80 x 110 x 44.8
	Dimension of Backplate (W x H x D, mm)	80 x 110 x 6.5

The function available for ALL SYSTEMS and 4 (MULTI V 5, MULTI V IV) (if needed)

Included Parts



Key Application

Refrigerant Leakage Detector has three application methods.



Accessory Specification (To realize the case 2, application)



※ Necessary accessory

1) Please contact to advise us to get the recommended specification. (LG Electronic don't provide this accessory)

EEV KIT (for Indoor Unit)

MULTI V EEV KIT is specially designed to reduce noise and make comfort environment.




Model Name
PRGM024A0

Key Features

• Decreasing noise level of Multi V indoor units and easy installation.

Key Application

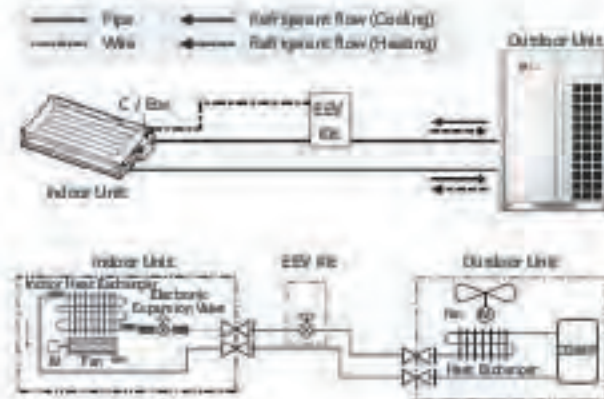

Applied Products

Indoor Unit	Model	Capacity	Applicable
Cassette	1 Way Cassette	TU	○
	2 Way Cassette	TT	NA
	4 Way Cassette	TS	○ (-5.5KW)
		TR	○
	Duct	TQ	○ (-4.5KW)
		TP	NA
TN		NA	
TM		-	
Floor Standing	BG	-	
	BR	-	
	BS	-	
	BB	-	
	M1	○ (-5.5KW)	
	M2	-	
Convertible	M3	-	
	L1	○	
	L2	-	
Celing Suspended	L3	-	
	CE	○	
Etc	CF	○	
	VE	○	
	VT	-	
	V2	-	
Hydro kit	SI	○	
	SK	○	
	SV	○	
	SF	○	
	QA	○	
	K2	○	
	K3	-	

○ : Applicable / - : Not applicable NA : Not Applicable


EEV Kit can be applied for the space which requires quiet environment and noise sensitive space.



Note: If you don't use EEV of same specification, Cooling (Heating) capacity could be decreased.

How to Install

- Open indoor unit's control box cover.
- Open fully indoor unit's EEV through vacuum mode of ODU setting.
- Detach the indoor unit's EEV connector from PCB and then push the reset button of Outdoor unit's PCB.
- After connecting indoor unit's EEV CONNECTOR, repeat the process ① & ②. Then connect the EEV CONNECTOR of EEV KIT in PCB of indoor unit.
- Finally connect the lead wire of the EEV KIT to the indoor unit's PCB.
- Assemble the control box cover.

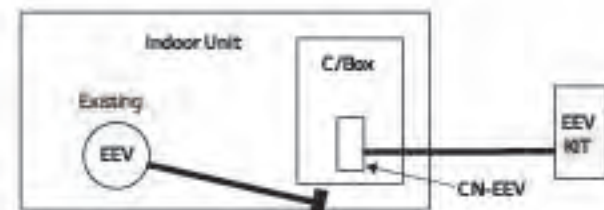

IR Receiver

IR RECEIVER can be connected to ceiling concealed duct and floor standing unit which the customer wants to control by wireless remote controller.



Model Name
PWLRVND00

Applied Products

Multi V Indoor (Ceiling Concealed Duct, Floor Standing Units)

Key Features

- Designed for wireless control
- Indication lamps (3 colors) and Self-diagnosis function

Key Application

Note: Do not install both the IR Receiver and Wired Remote Controller. This may cause malfunctions.



Operation of Indication Lamps

- Emergency Operation button: Turns the indoor unit on or off when remote controller is not working.
- Signal Detector: Receives the signal from remote controller.
- Timer lamp (Green): Lights up during the timer operation.
- Hotstart lamp (Orange): Lights up during the pre-heating operation, defrost operation as well as latent heat removal operation in heat mode. Available only for the heat pump models, not cooling only models.
- System On / Off lamp (Red): Lights up during system controller operation.
- Filter Sign lamp (Green): Lights up after 2,400 hours from the time of first power on operation.



Test Run Mode

After installing the product, you must run a test run mode. Press the Emergency Operation button for 5 seconds, until the LED flashes. Then the indoor unit, duct runs cooling mode for 18 minutes, where the setting temperature is 18°C and the fan speed is high.

Independent Power Module

It closes EEV in indoor there is a power cut.



Model Name
PRIP0

Applied Products
Multi V Indoor Lines

Key Features

- Independent Power Module is specially designed to close the indoor EEV when power cut-off.
- Supply Voltage: DC 12V ±50%

Included Parts

Model	PRIP0			
Item	Independent Power Kit	Screw	Clamp (Tie Wrap)	(Other)
Qty	1	2	4	- Harness 1 (1 m) - Harness 2 (1 m) - Harness 3 (1 m) - Harness 4 (0.05 m) - Installation Manual - Isolator (PE, 2 EA)
Figure				


Key Application

If the EEV is opened due to power cut-off, liquid refrigerant flows into compressor. It could damage the compressor in cooling mode. Also condensing might be happened for undosed EEV's indoor unit due to flow of refrigerant.



How to Install

- Turn the power off using circuit breaker.
- Disconnect the EEV cable of the indoor unit's PCB (CN_EEV).
- Connect the independent power kit (CN_EEV/LOAD) to the indoor unit's EEV, using harness 1.
- Connect the independent power kit (CN_EEV/MAN) to the indoor unit's PCB (CN_EEV/CN_WRITE or CN1 or CN1_IPM), using harness 2 or 3, 4.
- Supply the power.

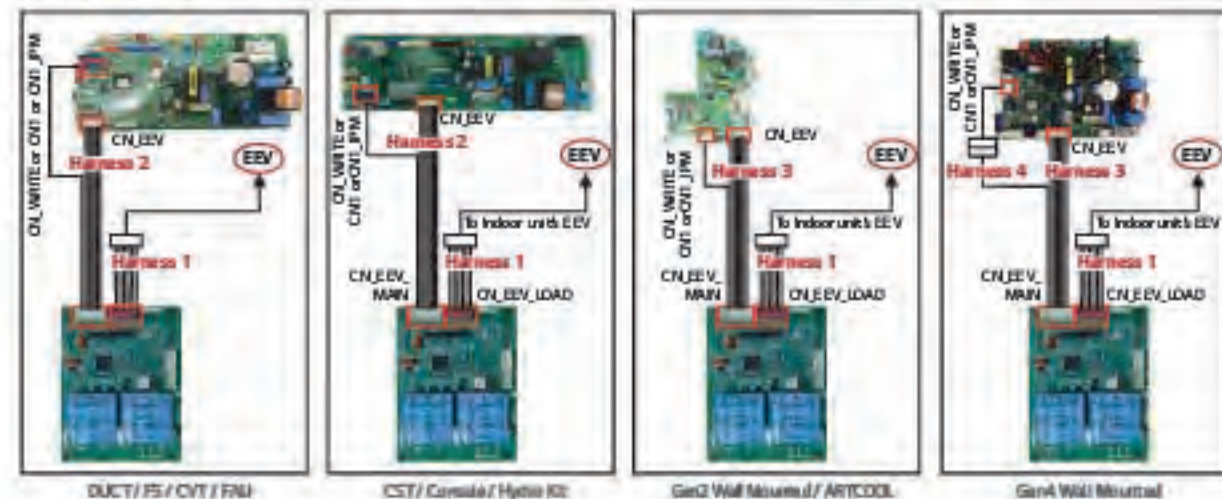

* PS: Floor Standing
* CVT: Console
* FAU: Fresh Air Intake Unit
* CST: Console

Auxiliary Heater Relay Kit

Providing an efficient way to add auxiliary heat.



Model Name
PRARH1

Applied Products
Wall Mounted, Art Cool Mirror, Art Cool Gallery

Model Name
PRARH1

Applied Products
1, 2, 4 Way Ceiling Cassette, High Static Ducted, Low Static Ducted, Ceiling Suspended

Key Features


- Provides two stages of auxiliary heat for indoor unit.
- Provides ability to use the two stage auxiliary heater as the primary or secondary heating source.

Included Parts


Model	PRARH1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Qty	1	2	2	1
Figure				

Model	PRARH1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Qty	1	2	2	1
Figure				

Key Application

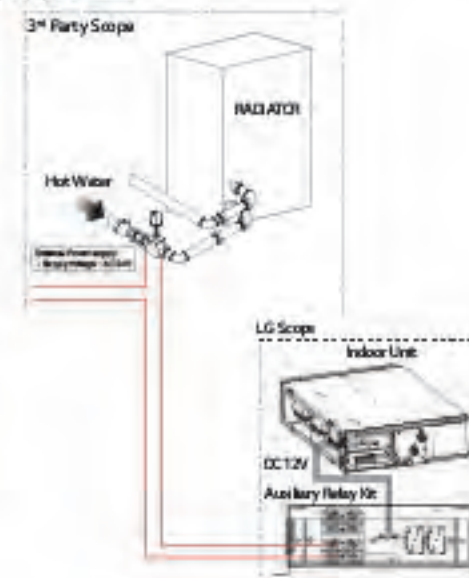

How to Install

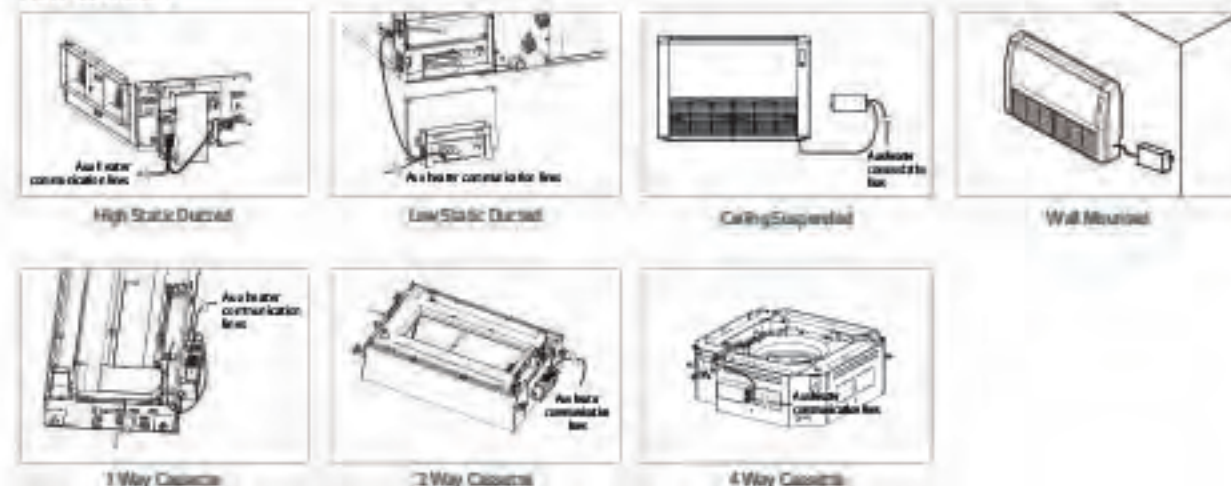

Heat Recovery



Model Name
 PRHRO23 (2 Branch Unit)
 PRHRO33 (3 Branch Unit)
 PRHRO43 (4 Branch Unit)
 PRHRO63 (6 Branch Unit)
 PRHRO83 (8 Branch Unit)

Applied Products
 Multi V S
 Multi V IV
 Multi V Water IV

Key Features

- Max. 64 indoor units can be connected. (Max. 8 indoor units per branch)
- It is easy to install due to the automatic search algorithm for piping detection
- Subcooling cycle in HR unit makes the system efficiency maximum

Connection Capacity
 Maximum number of connectable indoor units:
 64 IDUs / HR unit (in case of 8 ports model)




Flexible Connection
 Series connection can be installed without pipes crossing.



Considering the direction for indoor units and SVC port, connection for reverse direction makes much easier.

Reduce Noise

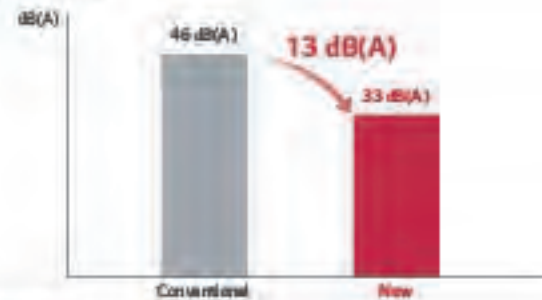

Test Condition (ISO Standard)
 - Temp.: (Cooling) 27°C DB / 19°C WB, 35°C DB / 24°C WB
 (Heating) 20°C DB / 15°C WB, 7°C DB / 6°C WB
 - Operating: cooling → heating switching operation

Included Parts

- HR Unit (1EA)
- Hanging bolts M10 or M8 (4EA)
- Nut M8 or M10 (8EA)
- Washers M10 (8EA)
- Reducers

Specification

Model		PRHRO23	PRHRO33	PRHRO43	PRHRO63	PRHRO83	
Number of Branch	EA	2	3	4	6	8	
Maximum Connectable Capacity of Indoor Units (Per branch / unit)	kW	17.5 / 35	17.5 / 52.5	17.5 / 69.5	17.5 / 69.5	17.5 / 69.5	
Maximum Number of Connectable Indoor Units Per Branch	EA	8	8	8	8	8	
Nominal Input	Cooling	kW	0.040	0.040	0.040	0.075	0.075
	Heating	kW	0.038	0.038	0.038	0.072	0.072
Net. Weight	kg	18.5	20.3	22.0	28.3	31.8	
Dimensions (W x H x D)	mm	786 x 218 x 657	786 x 218 x 657	786 x 218 x 657	1,113 x 218 x 657	1,113 x 218 x 657	
Indoor Unit	Liquid	mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
	Gas	mm (inch)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
Piping Connections	Liquid	mm (inch)	9.52 (3/8)	12.7 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Outdoor Unit	Low Pressure	mm (inch)	22.2 (7/8)	28.58 (11/8)	28.58 (11/8)	28.58 (11/8)
	High Pressure	mm (inch)	19.05 (3/4)	22.2 (7/8)	22.2 (7/8)	22.2 (7/8)	22.2 (7/8)
Power Supply	Ø, V, Hz	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	1, 220-240, 50	
		1, 220, 60	1, 220, 60	1, 220, 60	1, 220, 60	1, 220, 60	

Reducers for Indoor Unit and HR Unit

Model	Liquid	High Pressure	Low Pressure
Indoor unit reducer			
	PRHRO23		
HR unit reducer			
	PRHRO33 PRHRO43 PRHRO63 PRHRO83		

Y Branch and Header Branch

For refrigerant distribution of indoor units



Model Name

Refer to specifications

Applied Products


- Multi V S
- Multi V IV
- Multi V II, Multi V Plus II, Multi V Plus
- Multi V S
- Multi V Water N
- Multi V Water II
- Multi V Water S

Key Features


- Various Y Branch pipe of different capacities make MULTI V installation much easier.
- Y Branch and header branch for both gas and liquid are provided.
- Insulation material is also provided for covering the branches.

Key Application

Heat Pump System

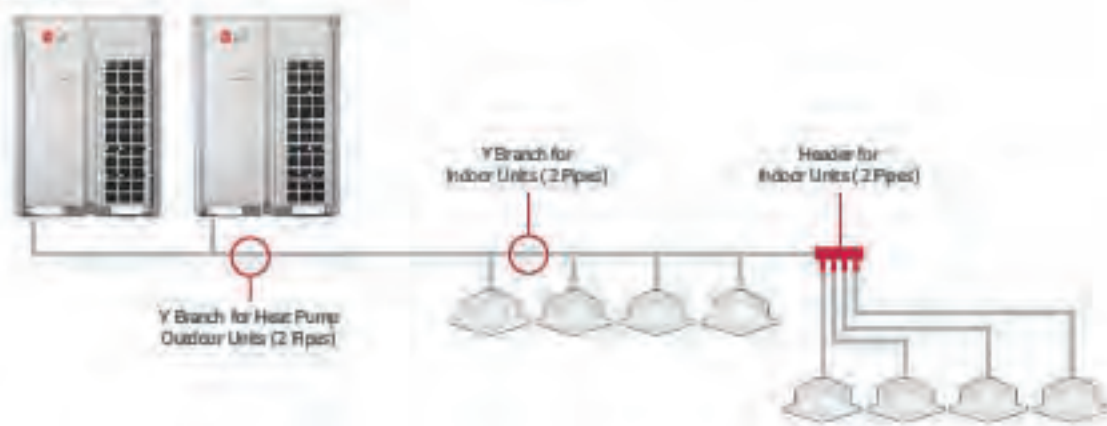

Heat Recovery System

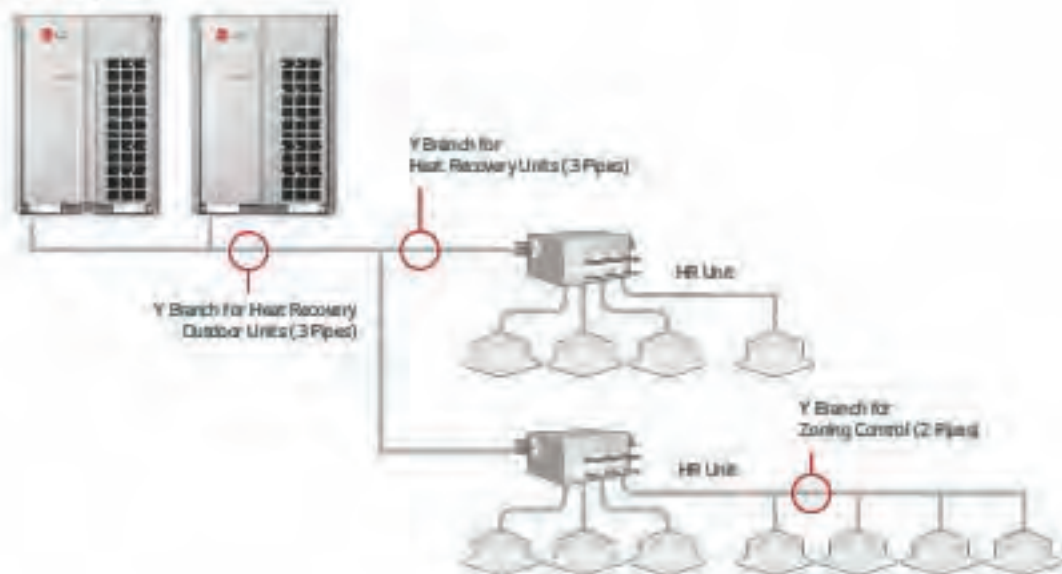

Specification

Header Branch
R410A

(Unit: mm)

Model	Gas Pipe	Liquid Pipe
ARBL054 (4 Branch)		
ARBL057 (7 Branch)		
ARBL104 (4 Branch)		
ARBL107 (7 Branch)		
ARBL1010 (10 Branch)		
ARBL2010 (10 Branch)		

Piping Accessories

Y Branch pipe for connection of outdoor units.

Specification

Heat Pump, Heat Recovery Zone Control

R410A MULTI V S, MULTI V IV, MULTI V III, MULTI V PLUS II, MULTI V PLUS, MULTI V S, MULTI V MINI, MULTI V SPACE II, MULTI V WATER IV, MULTI V WATER S, MULTI V WATER II

(1/4x1/2) (mm)

Model	Gas Pipe	Liquid Pipe
ARBLN01621		
ARBLN03321		
ARBLN07121		
ARBLN14521		
ARBLN23220		

Specification

Heat Recovery

R410A MULTI V S, MULTI V IV Heat Recovery, MULTI V II Heat Recovery, MULTI V WATER IV Heat Recovery, MULTI V WATER II Heat Recovery

(1/4x1/2) (mm)

Model	High Pressure Gas Pipe	Liquid Pipe	Low Pressure Gas Pipe
ARBLB01621			
ARBLB03321			
ARBLB07121			
ARBLB14521			
ARBLB23220			

Refrigerant Charging Kit

Recharging refrigerant after a pump down or when refrigerant is either insufficient or excessive.




Model Name
PRACT

Applied Products
MULTI V S
MULTI V N Heat Pump
MULTI V N Heat Recovery
MULTI V H Heat Pump
MULTI V H Heat Recovery
MULTI V PLUS H
MULTI V SYNC H

How to Use

- Arrange manifold, capillary assembly, refrigerant vessel and scale.
- Connect manifold to the gas pipe service valve of outdoor unit as shown in the figure.
- Connect manifold and capillary tube. Use designated capillary assembly only.
If designated capillary assembly isn't used, the system may get damaged.
- Connect capillary and refrigerant vessel.
- Purge hose and manifold.
- After "568" is displayed, open the valve and charge the refrigerant.

Key Application

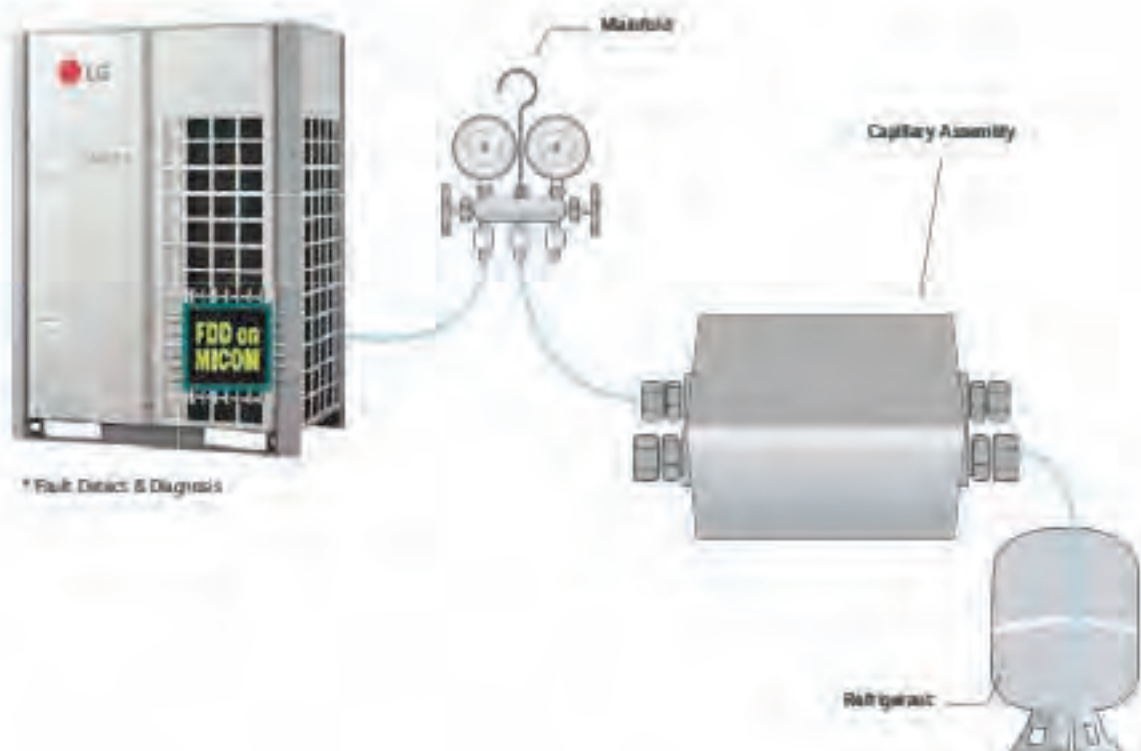

Drain Hose

Easy drain installation.



Model Name
PHDHA05T
PHDHA07T
PHDHA05B
PHDHA07B


Applied Products
Multi V Indoor units

Key Features

- It reduces the installation time by over 40% with elbow-less drain hose.
- Drain pump covers maximum 700mm high, featuring easy piping installation.

Key Application

- Ceiling Mounted Cassette and Ceiling Concealed Duct. (Refer to PDB for applicable model)

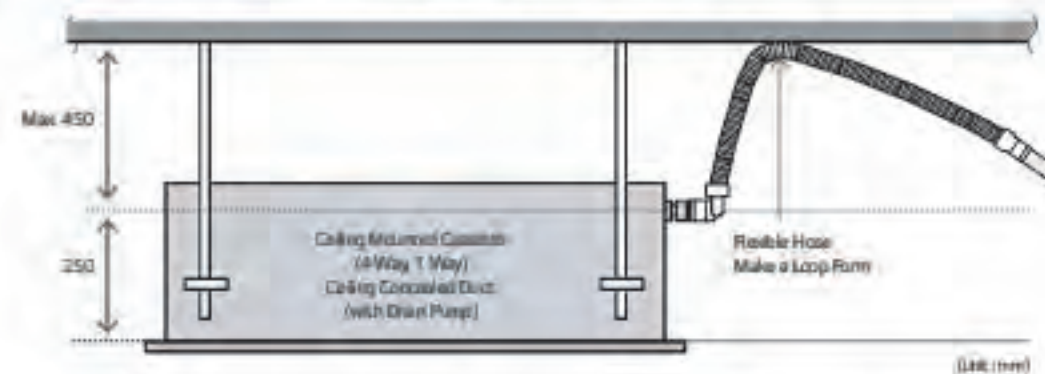

Specification

Model	Length	Quantity
PHDHA05T	500mm	30EA
PHDHA07T	700mm	30EA
PHDHA05B	500mm	5EA
PHDHA07B	700mm	5EA

Stopper Valves




Model Name
 PRVT120 (Under 12.7mm)
 PRVT780 (Under 22.2mm)
 PRVT580 (Under 28.58mm)

Key Features
 - This unit can be applied for the additional indoor units installation.
 - This unit can be applied for each indoor unit's service.

Specification

Model	Specification
PRVT120	
PRVT780	
PRVT580	

How to Install

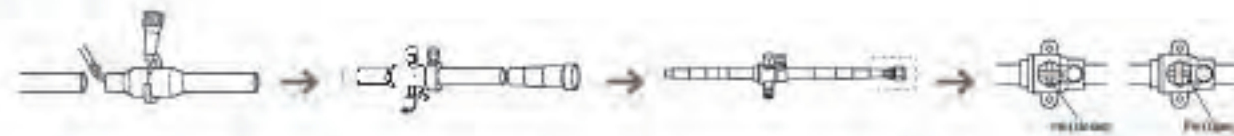


1. Cut the inlet side of the connector, and weld the pipe.
2. If installing additional indoor units, the outlet side connector should be cut according to installation pipe.
3. When installing a stopper valve, the flare part should be facing towards additional indoor unit.
4. When installing an additional indoor unit, the SVC valve should be in closed state.

When welding, service wire should be wrapped by wire cloth.

Application

(Room 3 & 4; in use / Room 1 & 2; need to install indoor units)

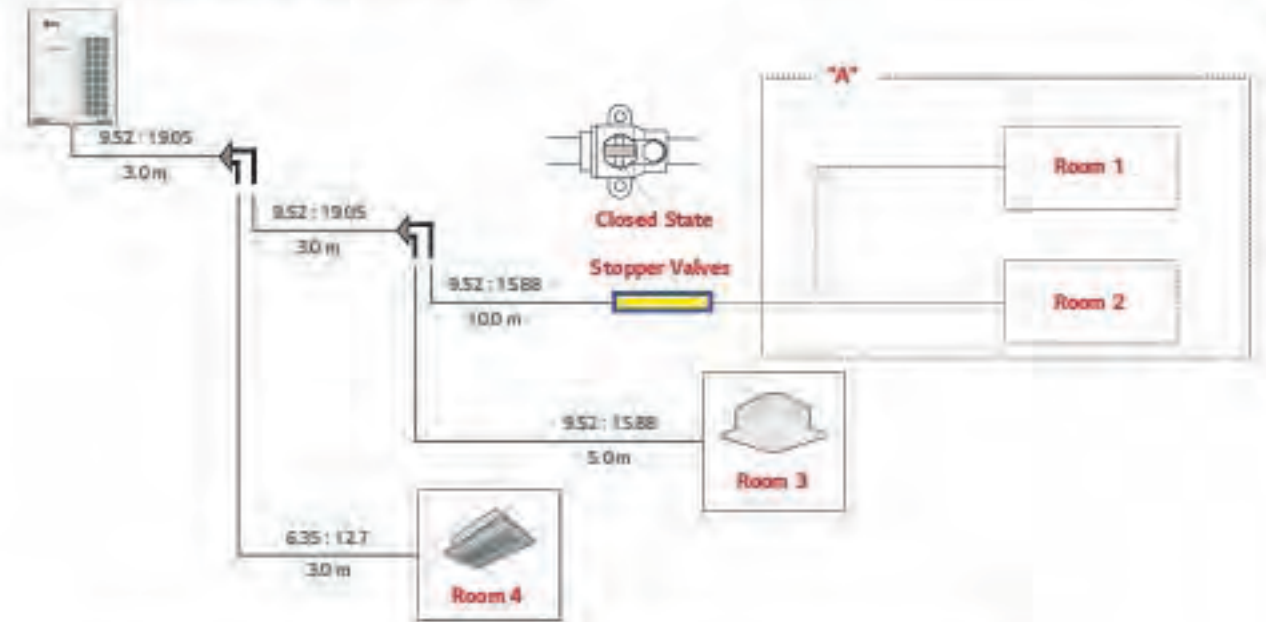

- In case of installation of additional indoor unit, refrigerant of used indoor unit must be discharged. (Room 3 & Room 4)
- If stopper valve is already installed, you can install additional indoor unit without refrigerant loss from the entire system.
- After installation of additional indoor unit, you just need refrigerant charging for "A" section.
- Then, open the Stopper Valve.

