


- CARREE ST LED 92733 ◇
6 11044 9220 ◇
◇ = A / W
- CARREE ST LED 93033 ◇
6 11044 9320 ◇
◇ = A / W
- CARREE ST LED 93533 ◇
6 11044 9520 ◇
◇ = A / W

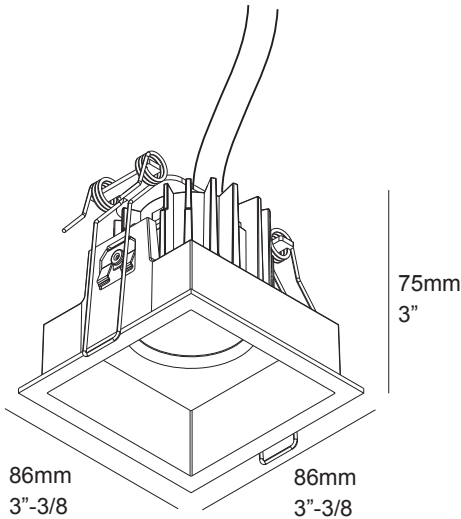

Application

Finishing section to be used with DELTA LIGHT® rough-in housing or plasterframe.

Ceiling Thickness

For 5/8" ceiling standard up to 7/8"

Light source

1 x 10,4-15W POWERLED WHITE

Power Supply

Included in rough-in or remodel option.

Connector

Housing and trim connection through pre-installed snap-in connector

Specification features

Body fabricated of surface treated aluminum
Pre-installed springs for easy installation
Suitable for dry and damp locations

Dimensions

Height: 75 mm = 3"
Width: 86 mm x 86 mm = 3"-3/8 x 3"- 3/8
Ceiling Cut out: 75mm x 75mm = 3" x 3" (Housing or plasterframe)

Required options

New construction

Housing for IC and/or airtight applications

Range	Installation type	Power/Dimming	Voltage 1 - 120V 2 - 277V 3 - 120-277V	Mounting Option 0 - No bar hangers 1 - Bar hangers standard
6 202	7 - IC AT Housing S	42 - 7W 1v-10V DIM	05 3 - 120-277V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	46 - 7W mains dimmable (LE)	05 1 - 120V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	48 - 7W non-dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	43 - 10W 1-10V DIM	05 3 - 120-277V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	49 - 10W non-dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	7 - IC AT Housing S	62 - 10W mains dimmable (LE)	05 1 - 120V	1 - Bar hangers standard

New construction







Plasterframe for NON-IC applications

Range	Installation type	Power/Dimming	Voltage 1 - 120V 2 - 277V 3 - 120-277V	Mounting Option 0 - No bar hangers 1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	00 - /	05 0 - /	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	46 - 7W mains dimmable (LE)	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	48 - 7W non-dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	49 - 10W non-dimmable	05 1 - 120V	1 - Bar hangers standard
6 202	01 - NIC Plasterframe S	62 - 10W mains dimmable (LE)	05 1 - 120V	1 - Bar hangers standard

Remodel

Range	Installation type	Power/Dimming	Voltage 1 - 120V 2 - 277V 3 - 120-277V	Spacings 1 - Standard spacings 1 - Marked spacings
6 202	9 - NIC-IC IJB	19 - 10W mains dimmable (LE)	1 - 120V	1 - Standard spacings
6 202	9 - NIC-IC IJB	20 - 10W 1-10V DIM	1 - 120V	1 - Standard spacings
6 202	9 - NIC-IC IJB	20 - 10W 1-10V DIM	2 - 277V	1 - Standard spacings
6 202	9 - NIC-IC IJB	21 - 14W mains dimmable (LE)	1 - 120V	1 - Marked spacings
6 202	9 - NIC-IC IJB	69 - 14W 1-10V DIM	1 - 120V	1 - Marked spacings
6 202	9 - NIC-IC IJB	69 - 14W 1-10V DIM	2 - 277V	1 - Marked spacings

INSTALLATION LUMINAIRE

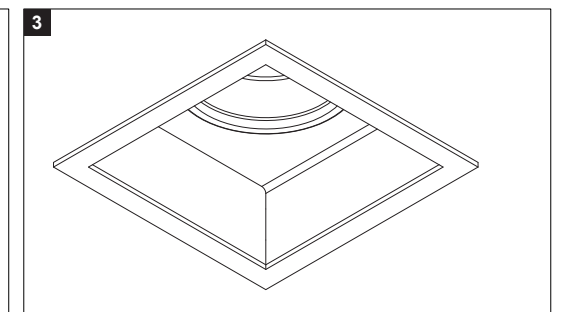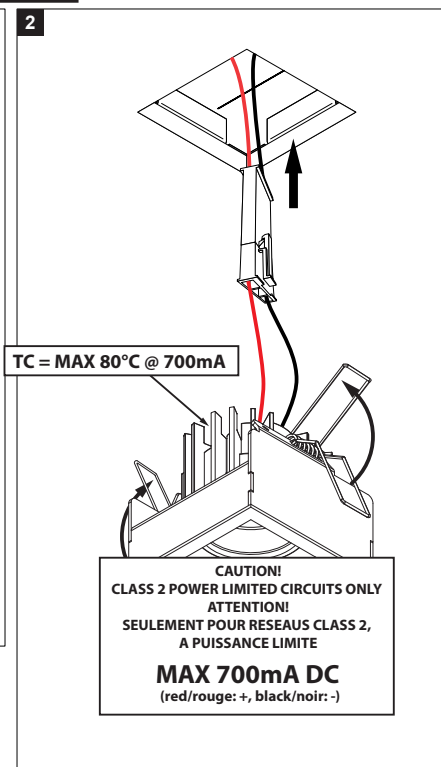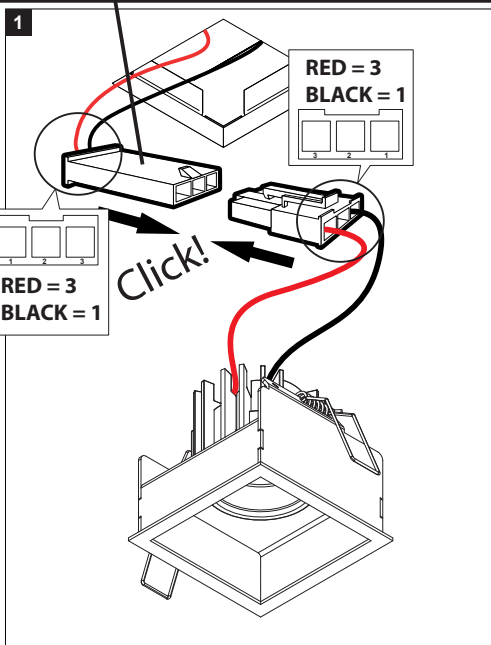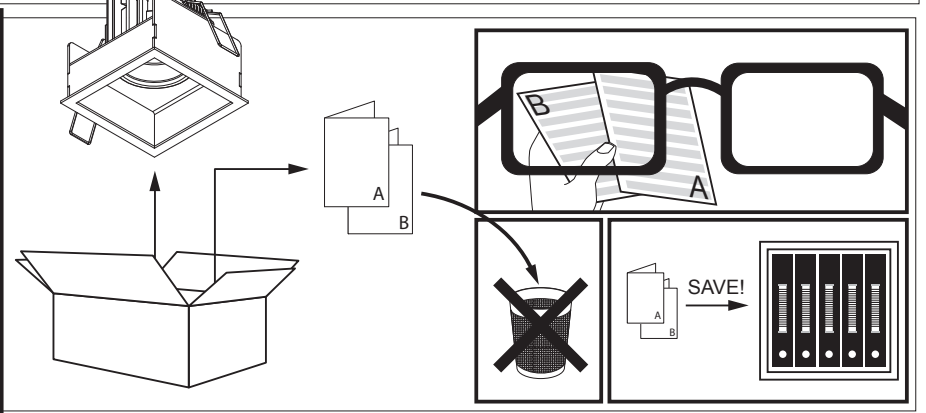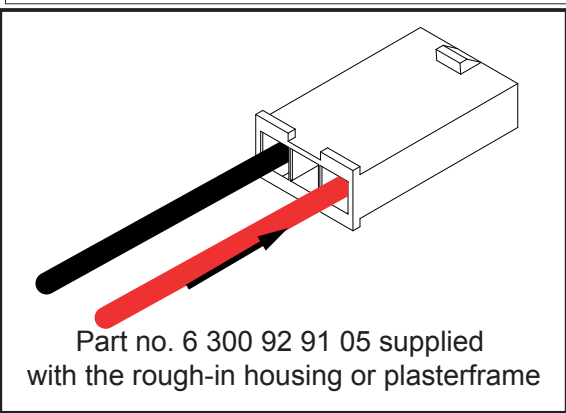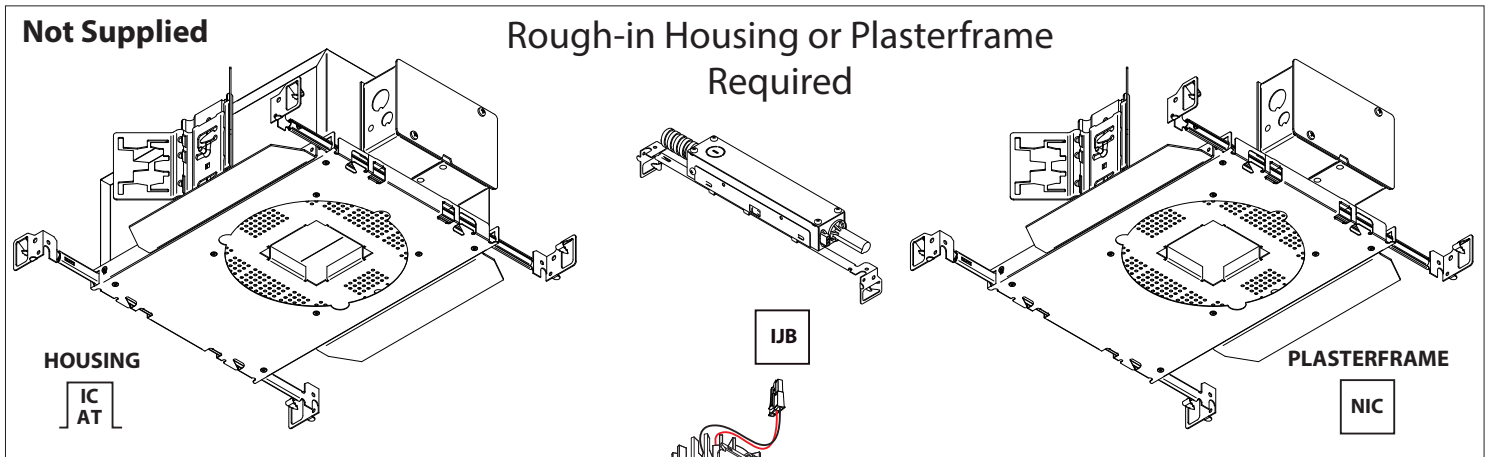



INSTALLATION IJB

