

HELI X SCREEN LED WW


6 202 04 22 ◊

◊ = A / N

HELI X SCREEN LED NW

6 202 04 24 ◊

◊ = A / N

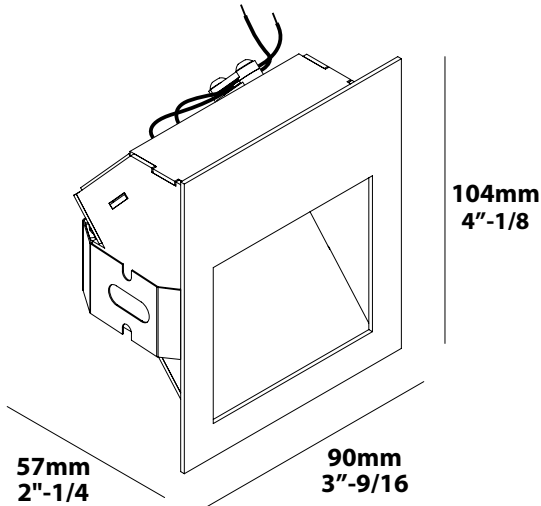

Application

Wall recessed
Concrete box installation
For indoor and outdoor use

Color Finish

A - Alu Grey
N - Dark Grey

Light source

6 202 04 22: 1 x POWERLED WHITE 1,1W
6 202 04 24: 1 x POWERLED WHITE 1,1W







Product description

Powder coated stainless steel housing
Current controled class 2 power supply required
Remote 350mA max, Typical forward voltage 2,8V.
Suitable dry, damp and wet locations
Dust-protected - Protected against splashing water ➔ IP54
Weight: 0,7lbs 0,3kg

Options (not supplied)

207 11 187 CONCRETE BOX 187

 INSTALLATION LUMINAIRE

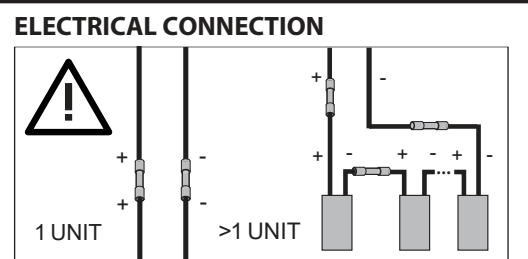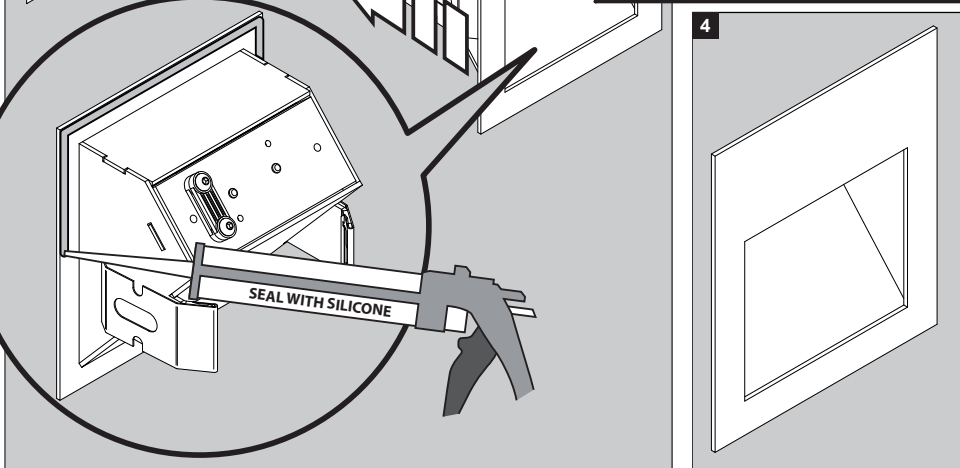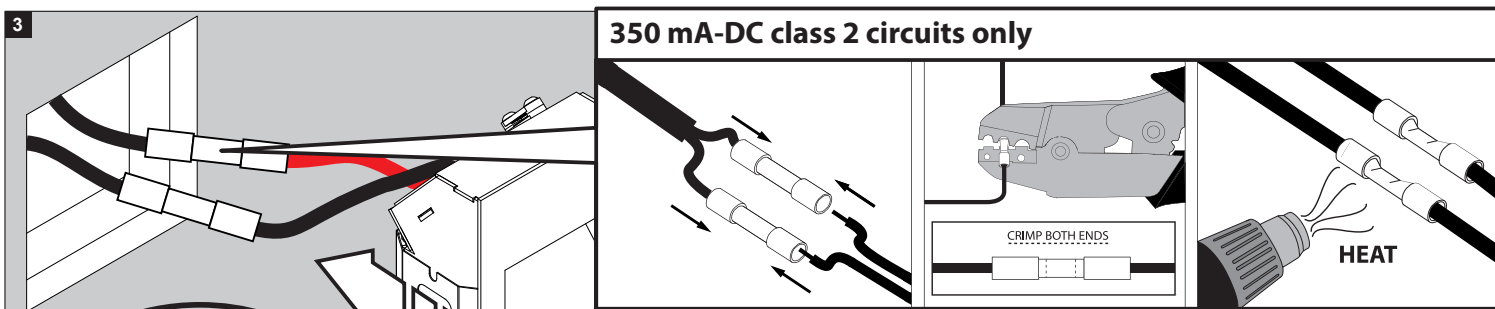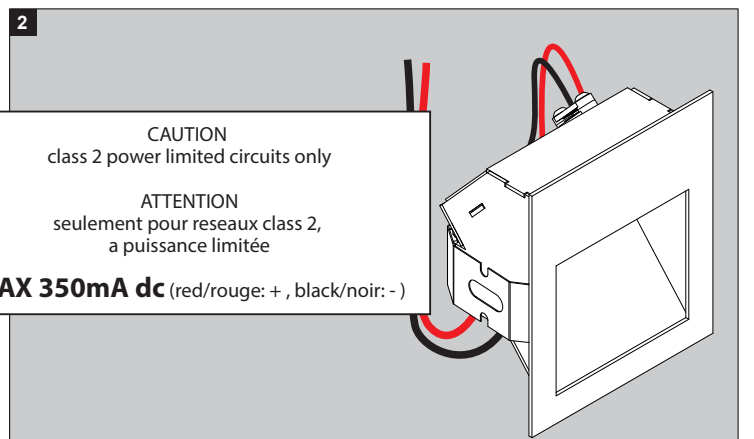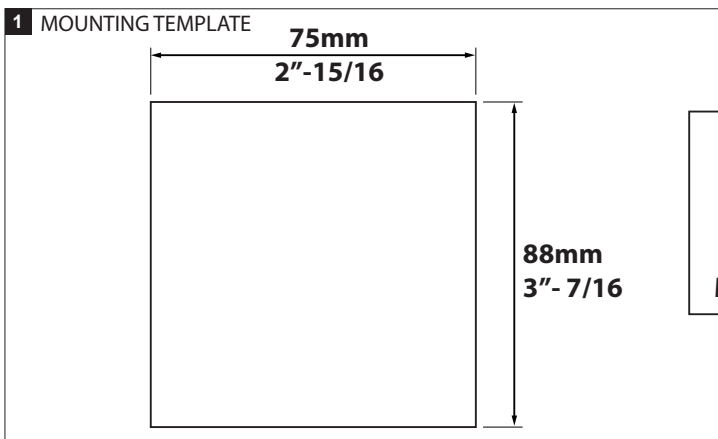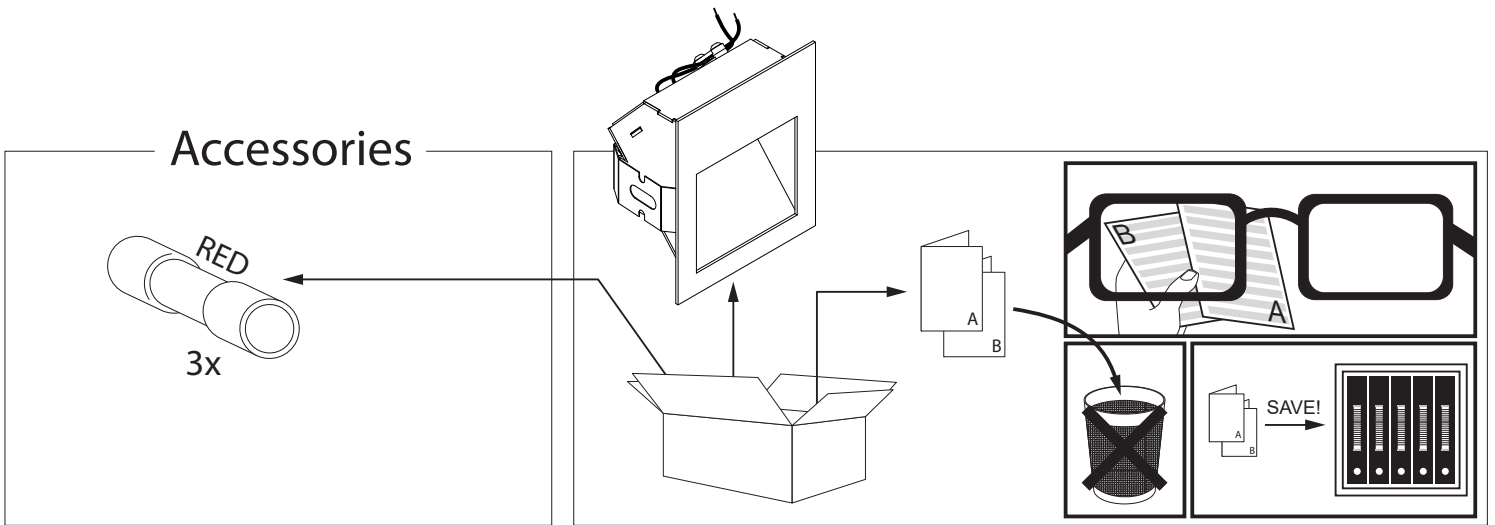

WARNING

- Fixtures **MUST** be connected in **SERIES**.
- Connecting fixtures to a live power supply will **damage** the led module.